



FINA SUPPORT studio

standing system


EN Miniature rectangular lamp made of aluminium; angular design; surface lacquered; plug and play electrical connector system for toolless mounting; different mechanical and electrical poles available; for flexible system design; equipped with miniature spotlight heads; spotlight heads rotatable and tiltable; high quality lens system; precise radiation characteristics with different beam angles; light inset rotatable; energy-efficient LEDs with very good colour rendering; converter plug and play; converter separately available

DE Miniatur Bügelleuchte aus Aluminium; kantige Bauform; Oberfläche lackiert; durchkontaktiertes elektrisches Stecksystem für werkzeuglose Montage; unterschiedliche mechanische und elektrische Pole verfügbar; für flexiblen Systemaufbau; bestückt mit Miniatur-Strahlerköpfen; Strahlerköpfe dreh- und schwenkbar; hochwertige Linsenoptik; präzise Abstrahlcharakteristik mit verschiedenen Ausstrahlwinkeln; Lichteinsatz drehbar; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Konverter steckerfertig vorkonfektioniert; Konverter ist separat zu bestellen

Quickinfo

3000 K, 4000 K
CRI ≥ 95 / 3 SDCM (initial MacAdam)
bis zu 18 lm/W
L80 / 50000 h, L85 / 50000 h
exkl. Treiber
IP20

Types



Farben



Lichtverteilung




CRI ≥ 95 , R9 ≥ 90




360° rotatable,
90° tiltable



easily
replaceable



FINA SUPPORT stadio 10 standing system



SPOT 18°, CRI ≥ 95, excl. driver

FIXTURE	COLOUR TEMP.	LUM. FLUX	ORDER CODE
4.4 W	3000 K	6x41 lm	0 1 1 - 2 2 0 3 0 1 ☒ S
4.7 W	4000 K	6x45 lm	0 1 1 - 2 2 0 3 1 1 ☒ S

Light inset incl. 1 electrical linear connector (UL version only); note the maximum allowed system power from the mounting instructions

MEDIUM 30°, CRI ≥ 95, excl. driver

FIXTURE	COLOUR TEMP.	LUM. FLUX	ORDER CODE
4.2 W	3000 K	6x55 lm	0 1 1 - 2 2 0 3 0 1 ☒ M
4.5 W	4000 K	6x60 lm	0 1 1 - 2 2 0 3 1 1 ☒ M


Light inset incl. 1 electrical linear connector (UL version only); note the maximum allowed system power from the mounting instructions

FLOOD 39°, CRI ≥ 95, excl. driver

FIXTURE	COLOUR TEMP.	LUM. FLUX	ORDER CODE
4.2 W	3000 K	6x55 lm	0 1 1 - 2 2 0 3 0 1 ☒ F
4.5 W	4000 K	6x60 lm	0 1 1 - 2 2 0 3 1 1 ☒ F

Light inset incl. 1 electrical linear connector (UL version only); note the maximum allowed system power from the mounting instructions


Planning Information

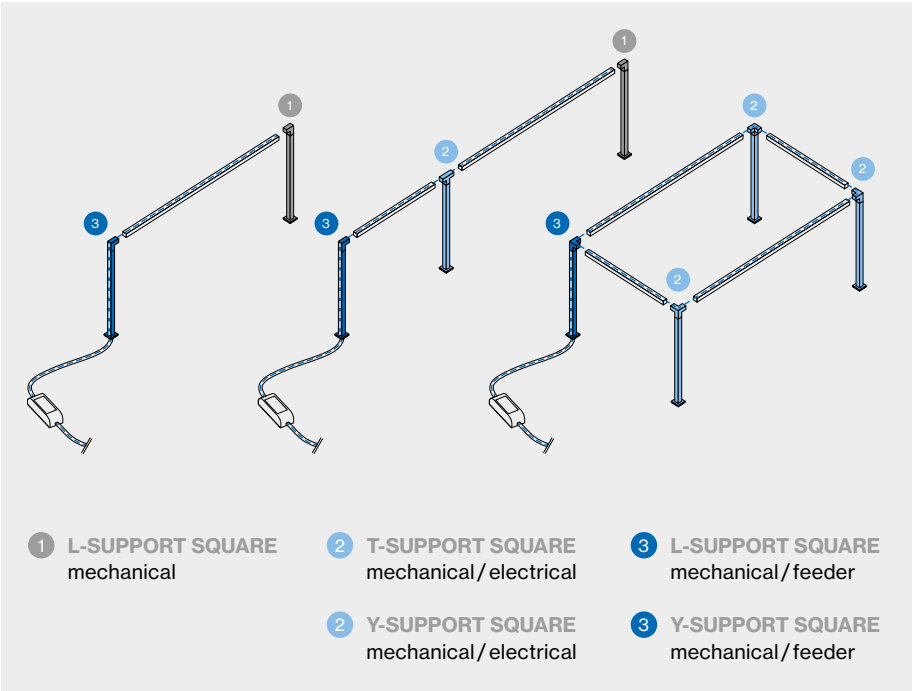

Order options


WIDTH	W	WIDTH	W	COLOUR	☒
20 mm	1	95 mm	7	white aluminium RAL 9006	6
35 mm	4	100 mm	8	tar black RAL 9021	8
50 mm	5				
85 mm	6				

Electrical mounting accessories (optional)



CONNECTION CABLE

TYPE	ORDER CODE
1 × open / 1 × DC plug	0 1 1 - 9 2 2 2 6 2 0




EXTENSION CABLE 1 × socket / 1 × plug, 350 mA

feeder length	ORDER CODE
1000 mm	0 1 1 - 9 2 2 2 1 2 0
2000 mm	0 1 1 - 9 2 2 2 1 4 0
4000 mm	0 1 1 - 9 2 2 2 1 8 0


FLEX CONNECTOR 0-83° electrical

L-W (mm)	ORDER CODE
33-6	0 1 1 - 9 2 2 5 4 0 0



MOUNTING POLE L mechanical / feeder

L (mm)	ORDER CODE
180	0 1 1 - 9 1 2 W 1 3 ☒
200	0 1 1 - 9 1 2 W 2 3 ☒
300	0 1 1 - 9 1 2 W 3 3 ☒




MOUNTING POLE T mechanical / electrical

L-W (mm)	ORDER CODE
180-31	0 1 1 - 9 1 2 2 1 2 ☒
200-31	0 1 1 - 9 1 2 2 2 2 ☒
300-31	0 1 1 - 9 1 2 2 3 2 ☒



MOUNTING POLE Y mechanical / electrical


L-W (mm)	ORDER CODE
180-24	0 1 1 - 9 1 2 3 1 2 ☒
200-24	0 1 1 - 9 1 2 3 2 2 ☒
300-24	0 1 1 - 9 1 2 3 3 2 ☒



MOUNTING POLE Y mechanical / feeder

L-W (mm)	ORDER CODE
180-24	0 1 1 - 9 1 2 3 1 3 ☒
200-24	0 1 1 - 9 1 2 3 2 3 ☒
300-24	0 1 1 - 9 1 2 3 3 3 ☒

Mounting accessories (optional)



MOUNTING POLE L mechanical

COLOUR	L-W (mm)	ORDER CODE
white aluminium	180-20	0 1 1 - 9 1 2 1 1 1 6
tar black	180-20	0 1 1 - 9 1 2 1 1 1 8
white aluminium	200-20	0 1 1 - 9 1 2 1 2 1 6
tar black	200-20	0 1 1 - 9 1 2 1 2 1 8
white aluminium	300-20	0 1 1 - 9 1 2 1 3 1 6
tar black	300-20	0 1 1 - 9 1 2 1 3 1 8

Order options

WIDTH	W	WIDTH	W	COLOUR	☒
20 mm	1	95 mm	7	white aluminium RAL 9006	6
35 mm	4	100 mm	8	tar black RAL 9021	8
50 mm	5				
85 mm	6				

COLOUR	L-W (mm)	ORDER CODE
white aluminium	180-35	0 1 1 - 9 1 2 4 1 1 6
tar black	180-35	0 1 1 - 9 1 2 4 1 1 8
white aluminium	200-35	0 1 1 - 9 1 2 4 2 1 6
tar black	200-35	0 1 1 - 9 1 2 4 2 1 8
white aluminium	300-35	0 1 1 - 9 1 2 4 3 1 6
tar black	300-35	0 1 1 - 9 1 2 4 3 1 8
white aluminium	180-50	0 1 1 - 9 1 2 5 1 1 6
tar black	180-50	0 1 1 - 9 1 2 5 1 1 8
white aluminium	200-50	0 1 1 - 9 1 2 5 2 1 6
tar black	200-50	0 1 1 - 9 1 2 5 2 1 8
white aluminium	300-50	0 1 1 - 9 1 2 5 3 1 6
tar black	300-50	0 1 1 - 9 1 2 5 3 1 8
white aluminium	180-85	0 1 1 - 9 1 2 6 1 1 6
tar black	180-85	0 1 1 - 9 1 2 6 1 1 8
white aluminium	200-85	0 1 1 - 9 1 2 6 2 1 6
tar black	200-85	0 1 1 - 9 1 2 6 2 1 8
white aluminium	300-85	0 1 1 - 9 1 2 6 3 1 6
tar black	300-85	0 1 1 - 9 1 2 6 3 1 8
white aluminium	180-95	0 1 1 - 9 1 2 7 1 1 6
tar black	180-95	0 1 1 - 9 1 2 7 1 1 8
white aluminium	200-95	0 1 1 - 9 1 2 7 2 1 6
tar black	200-95	0 1 1 - 9 1 2 7 2 1 8
white aluminium	300-95	0 1 1 - 9 1 2 7 3 1 6
tar black	300-95	0 1 1 - 9 1 2 7 3 1 8
white aluminium	180-100	0 1 1 - 9 1 2 8 1 1 6
tar black	180-100	0 1 1 - 9 1 2 8 1 1 8
white aluminium	200-100	0 1 1 - 9 1 2 8 2 1 6
tar black	200-100	0 1 1 - 9 1 2 8 2 1 8
white aluminium	300-100	0 1 1 - 9 1 2 8 3 1 6
tar black	300-100	0 1 1 - 9 1 2 8 3 1 8

Electrical accessories (optional)

POWER SUPPLY 24V EU PC2

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
18 W non DIM	198-264 V AC	η 86 %	130-43-30	0 1 1 - 9 2 1 2 1 1 0
35 W non DIM	198-264 V AC	η 86 %	195-43-30	0 1 1 - 9 2 1 2 2 1 0
100 W non DIM	198-264 V AC	η 92 %	220-43-30	0 1 1 - 9 2 1 2 3 1 0
18 W DALI-2	198-264 V AC	η 84 %	130-43-30	0 1 1 - 9 2 1 2 1 3 0
35 W DALI-2	198-264 V AC	η 89 %	195-43-30	0 1 1 - 9 2 1 2 2 3 0
60 W DALI-2	198-240 V AC	η 93 %	220-43-30	0 1 1 - 9 2 1 2 3 3 0

incl. power cable 2 m + connection cable with plug 1 m

POWER SUPPLY 24V UL non DIM, 100-305 V AC, PC2

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
25 W	η 88 %	147-40-32	0 1 1 - 9 2 7 2 1 1 0
40 W	η 88 %	147-40-32	0 1 1 - 9 2 7 2 2 1 0
60 W	η 87 %	176-45-32	0 1 1 - 9 2 7 2 3 1 0

Order options

WIDTH	W	WIDTH	W	COLOUR	
20 mm	1	95 mm	7	white aluminium RAL 9006	6
35 mm	4	100 mm	8	tar black RAL 9021	8
50 mm	5				
85 mm	6				

POWER SUPPLY 24V UL incl. metalbox non DIM, 100-305 V AC, PC2

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
25 W	η 88 %	196-68-45	0 1 1 - 9 2 9 2 1 1 0
40 W	η 88 %	196-68-45	0 1 1 - 9 2 9 2 2 1 0
60 W	η 87 %	223-66-55	0 1 1 - 9 2 9 2 3 1 0

SYSTEM SPLITTER

TYPE	ORDER CODE
3 way	0 1 1 - 9 2 3 8 3 0 0
6 way	0 1 1 - 9 2 3 8 6 0 0

Order options

WIDTH	W	WIDTH	W	COLOUR	☐
20 mm	1	95 mm	7	white aluminium RAL 9006	6
35 mm	4	100 mm	8	tar black RAL 9021	8
50 mm	5				
85 mm	6				

Pole overview



L-SUPPORT standing

EN Arranged linearly along the showcase table, FINA support System, electrically and mechanically connected via the L-Support Poles, ensures excellent illumination of the products or exhibits without restricting the view.

DE Lineare angeordnet entlang des Vitrinen Tisches sorgt FINA support System, elektrisch und mechanisch über die L-Support Pole verbunden, für eine hervorragende Ausleuchtung der Ware oder Exponate, ohne den Blick darauf einzuschränken.



T-SUPPORT standing

EN The T-Support Pole of the FINA support system is primarily used for large display case when several light insets are combined and arranged in a row. The T-Support poles are used to connect them together electrically and mechanically.

DE Die T-Support Pole des FINA support Systems findet vor allem bei großen Vitrinenflächen ihren Einsatz, wenn mehrere Lichteinsätze kombiniert und aneinandergereiht werden. Mittels der T-Support Pole werden diese elektrisch und mechanisch miteinander verbunden.



Y-SUPPORT standing

EN The Y-connectors of the FINA support system enable ideal illumination of the entire display case by allowing different insets to be mechanically and electrically connected to each other, even via corners.

DE Die Y-Connectors des FINA support Systems ermöglichen eine ideale Ausleuchtung der gesamten Vitrine, indem unterschiedliche Insets auch über Ecken miteinander mechanisch und elektrisch verbunden werden können.