
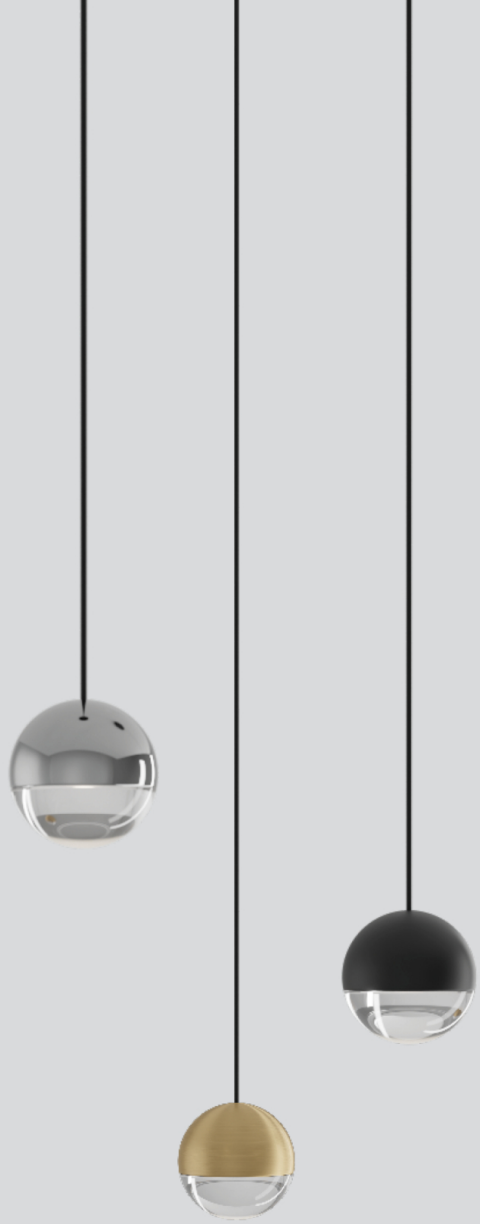


Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
bis zu 158 lm/W
L90 / 100000 h
DALI-2, nicht dimmbar
IP20

Types



Farben



Kabel



Lichtverteilung




NOBA

suspended

EN Decorative suspended luminaire in aluminium; surface polished chrome, brushed aluminium or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; high quality plano-convex glass lens; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

DE Dekorative Pendelleuchte aus Aluminium; Oberfläche chrom poliert, Aluminium gebürstet oder pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; hochwertige plankonvexe Glaslinse; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; Konverter im Baldachin enthalten; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich




free positioning by cable and hook



high quality glass lens






NOBA 40 suspended

CRI ≥ 90 · 2 SDCM · UGR ≤ 22 · cd/m² ≤ 3000 · III · DALI 1 ADDR. · X-PERT · X-PERT

WIDE FLOOD 69°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.8 W,	2700 K	601 lm	126 lm/W	0 4 9 - 5 3 1 0 9 1 ◪ ■ W
36 Vf,	3000 K	625 lm	131 lm/W	0 4 9 - 5 3 1 0 0 1 ◪ ■ W
150 mA	4000 K	655 lm	137 lm/W	0 4 9 - 5 3 1 0 1 1 ◪ ■ W






NOBA 50 suspended

CRI ≥ 90 · 2 SDCM · UGR ≤ 22 · cd/m² ≤ 1500 · III · DALI 1 ADDR. · X-PERT · X-PERT

WIDE FLOOD 67°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.8 W,	2700 K	635 lm	133 lm/W	0 4 9 - 5 3 1 3 9 1 ◪ ■ W
36 Vf,	3000 K	660 lm	138 lm/W	0 4 9 - 5 3 1 3 0 1 ◪ ■ W
150 mA	4000 K	691 lm	144 lm/W	0 4 9 - 5 3 1 3 1 1 ◪ ■ W






NOBA 60 suspended

CRI ≥ 90 · 2 SDCM · UGR ≤ 19 · cd/m² ≤ 1500 · III · DALI 1 ADDR. · X-PERT · X-PERT

WIDE FLOOD 67°, CRI ≥ 90

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.8 W,	2700 K	765 lm	158 lm/W	0 4 9 - 5 3 1 6 9 1 ◪ ■ W
36 Vf,	3000 K	691 lm	143 lm/W	0 4 9 - 5 3 1 6 0 1 ◪ ■ W
150 mA	4000 K	723 lm	150 lm/W	0 4 9 - 5 3 1 6 1 1 ◪ ■ W

Mounting accessories (required)




MOUNTING SET trimless for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø·H (mm)	ORDER CODE
traffic white	9-25 mm	75·48	0 0 5 - 3 5 1 1 1 1 7

excl. power supply

Order options

COLOUR ◪		COLOUR ◪		CABLE ■	
brushed brass	3	traffic white RAL 9016	7	white	7
chrome	4	jet black RAL 9005	8	black	8
gun metal	5	rose gold	9		
brushed aluminium	6				



MOUNTING SET with trim for ceilings, 2-25 mm

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	77·49	005-352111 7
jet black	77·49	005-352111 8

excl. power supply


Mounting accessories (optional)



HOOK surface

COLOUR	Ø·H (mm)	ORDER CODE
traffic white	16·30	030-100001 7
jet black	16·30	030-100001 8

Mounting tools accessories (optional)



SPECIAL MOUNTING TOOL for ARY | MOVE IN 45 | NOBA trimless | TULA


Ø·H (mm)	ORDER CODE
100·107	063-891211 0

necessary to install mounting housing trimless

Electrical accessories (required)

POWER SUPPLY 150 mA, 198-264 V AC, PC2

TYPE	EFFICIENCY	L·W·H (mm)	ORDER CODE
6 W | non DIM	η 80 %	93·36·25	002-90810
15 W | DALI-2	η 87 %	112·29·21	002-90811




CANOPY

CONTROL	Ø·H (mm)	ORDER CODE
non DIM	115·29	005-260121 [1]
DALI-2	115·29	005-260123 [1]

incl. power supply

Electrical accessories (optional)



DIN RAIL POWER SUPPLY BASIC 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L·W·H (mm)	ORDER CODE
160 W | PC2	220-240 V AC	η 94 %	72·90·63	005-652020 1 0

Lifetime >100.000 h @ 120 W, 45°C ambient temp., cascadable max. 3 devices

DIN RAIL LED DRIVER

TYPE	L·W·H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36·88·59	005-612103 0

200 - 1050 mA settable const. current | 2 × 42 W | 48 V DC | U OUT 10 – 40 V SELV

Order options

COLOUR [1]	
traffic white RAL 9016	7
jet black RAL 9005	8