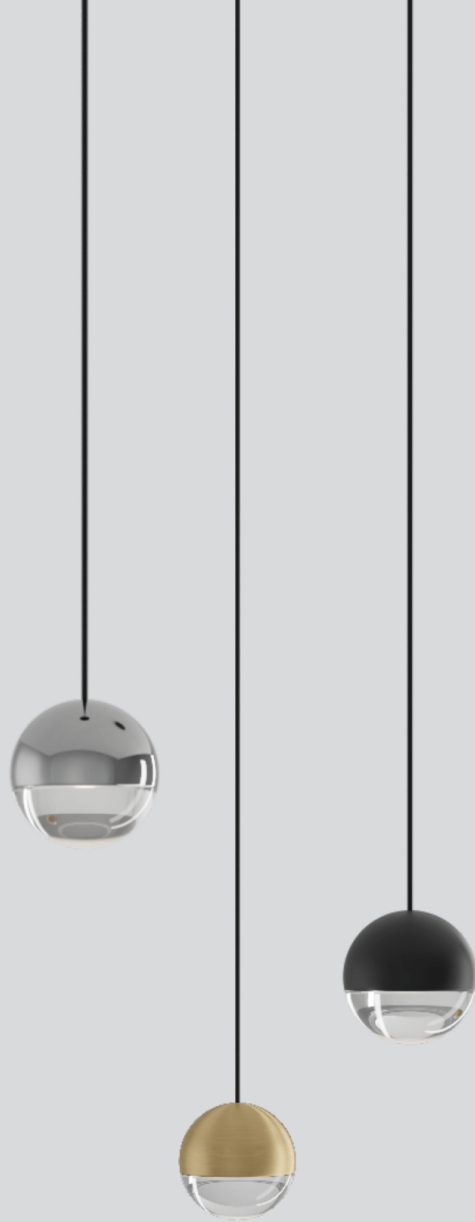




NOBA

suspended


EN Decorative suspended luminaire in aluminium; surface polished chrome, brushed aluminium or powder coated; pendant fitting with suspension, incl. feed (black or white); can be individually shortened; high quality plano-convex glass lens; no multiple shadows; energy-efficient LEDs with very good colour rendering; canopy for through wiring; converter included in canopy; ceiling mounting rings for multiple positioning of the luminaire in the room available as accessory

DE Dekorative Pendelleuchte aus Aluminium; Oberfläche chrom poliert, Aluminium gebürstet oder pulverbeschichtet; abgependelt mit Pendelabhängung, inkl. Einspeiseleitung (schwarz oder weiß); beliebig kürzbar; hochwertige plano-konvexe Glaslinse; keine Mehrfachschatten; energieeffiziente LEDs mit sehr guter Farbwiedergabe; Baldachin für Weiterverdrahtung; Konverter im Baldachin enthalten; Deckenmontageringe für multiple Positionierung der Leuchte im Raum als Zubehör erhältlich

Quickinfo

2700 K, 3000 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
bis zu 158 lm/W
L90 / 100000 h
DALI-2, nicht dimmbar
IP20

Types




Farben



Kabel



Lichtverteilung





free positioning
by cable and
hook





high quality
glass lens

**NOBA 40 suspended****WIDE FLOOD 69°, CRI ≥ 90**


FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.8 W,	2700 K	601 lm	126 lm/W	0 4 9 - 5 3 1 0 9 1 ☒ ☒ W
36 Vf,	3000 K	625 lm	131 lm/W	0 4 9 - 5 3 1 0 0 1 ☒ ☒ W
150 mA	4000 K	655 lm	137 lm/W	0 4 9 - 5 3 1 0 1 1 ☒ ☒ W

**NOBA 50 suspended****WIDE FLOOD 67°, CRI ≥ 90**

FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.8 W,	2700 K	635 lm	133 lm/W	0 4 9 - 5 3 1 3 9 1 ☒ ☒ W
36 Vf,	3000 K	660 lm	138 lm/W	0 4 9 - 5 3 1 3 0 1 ☒ ☒ W
150 mA	4000 K	691 lm	144 lm/W	0 4 9 - 5 3 1 3 1 1 ☒ ☒ W

**NOBA 60 suspended****WIDE FLOOD 67°, CRI ≥ 90**


FIXTURE	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
4.8 W,	2700 K	765 lm	158 lm/W	0 4 9 - 5 3 1 6 9 1 ☒ ☒ W
36 Vf,	3000 K	691 lm	143 lm/W	0 4 9 - 5 3 1 6 0 1 ☒ ☒ W
150 mA	4000 K	723 lm	150 lm/W	0 4 9 - 5 3 1 6 1 1 ☒ ☒ W

Mounting accessories (required)**MOUNTING SET trimless** for plasterboard ceilings

COLOUR	CEILING THICKNESS	Ø-H (mm)	ORDER CODE
traffic white	9-25 mm	75-48	0 0 5 - 3 5 1 1 1 1 7
excl. power supply			

Order options

COLOUR		COLOUR		CABLE	
brushed brass	3	traffic white RAL 9016	7	white	7
chrome	4	jet black RAL 9005	8	black	8
gun metal	5	rose gold	9		
brushed aluminium	6				


**MOUNTING SET with trim** for ceilings, 2-25 mm

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	77-49	0 0 5 - 3 5 2 1 1 1 7
jet black	77-49	0 0 5 - 3 5 2 1 1 1 8

excl. power supply

Mounting accessories (optional)**HOOK surface**

COLOUR	Ø-H (mm)	ORDER CODE
traffic white	16-30	0 3 0 - 1 0 0 0 0 1 7
jet black	16-30	0 3 0 - 1 0 0 0 0 1 8

Mounting tools accessories (optional)**SPECIAL MOUNTING TOOL** for ARY | MOVE IN 45 | NOBA trimless | TULA

Ø-H (mm)	ORDER CODE
100-107	0 6 3 - 8 9 1 2 1 1 0

necessary to install mounting housing trimless


Electrical accessories (required)**POWER SUPPLY** 150 mA, 198-264 V AC, PC2

TYPE	EFFICIENCY	L-W-H (mm)	ORDER CODE
6 W non DIM	η 80 %	93-36-25	0 0 2 - 9 0 8 1 0
15 W DALI-2	η 87 %	112-29-21	0 0 2 - 9 0 8 1 1

**CANOPY**

CONTROL	Ø-H (mm)	ORDER CODE
non DIM	115-29	0 0 5 - 2 6 0 1 2 1
DALI-2	115-29	0 0 5 - 2 6 0 1 2 3

incl. power supply

Electrical accessories (optional)**DIN RAIL POWER SUPPLY BASIC** 48 V

TYPE	INPUT VOLTAGE	EFFICIENCY	L-W-H (mm)	ORDER CODE
160 W PC2	220-240 V AC	η 94 %	72-90-63	0 0 5 - 6 5 2 0 2 1 0

Lifetime >100.000h @ 120W, 45°C ambient temp., cascable max. 3 devices

DIN RAIL LED DRIVER

TYPE	L-W-H (mm)	ORDER CODE
DALI-2 DT6 1-2 addresses / DT8 1 adress	36-88-59	0 0 5 - 6 1 2 1 0 3 0

200 - 1050 mA settable const. current | 2×42W | 48V DC | U OUT 10-40V SELV

Order options

COLOUR		COLOUR		CABLE	
brushed brass	3	traffic white RAL 9016	7	white	7
chrome	4	jet black RAL 9005	8	black	8
gun metal	5	rose gold	9		
brushed aluminium	6				