



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 16, UGR ≤ 19
bis zu 127 lm/W
L90 / 50000 h
DALI-2, nicht dimmbar
front IP20

Types



Farben



Montage Set



Lichtverteilung






UNICO L2 / L3

recessed

EN Rectangular recessed multi-downlight made of die-cast aluminium; equipped with two (L2) / three (L3) individually selectable or pre-specified, customised light elements; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation possible in different housings; high quality reflector with micro-faceted, aluminum-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering

DE Rechteckiger Einbau-Multi-Downlight aus Aluminiumdruckguss; bestückt mit zwei (L2) / drei (L3) individuell wählbaren oder fix definierten, anwendungsspezifischen Optiken; werkzeuglose Montage im Montageset durch Kugelschnappsystem; einfache elektrische Montage durch verpolungssichere Steckverbindung; geeignet für Deckenstärken von 2-25 mm; Oberfläche pulverbeschichtet; Einbau in unterschiedlichen Gehäusen möglich; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe



black & chrome reflector




one luminaire multiple scenes



up to 145 lm/W (high efficiency)



tunable white 2700 – 5000 K (optional)







UNICO L2

CRI ≥ 90 · 2 SDCM · UGR ≤ 10 · cd/m² ≤ 1500 · 1 ADDR. · X-PERT · X-PERT

SPOT ROUND 19°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	626 lm	101 lm/W	0 9 0 - 7 L 2 9 ⬍ K 0 ◪ 4 1
	3000 K	626 lm	101 lm/W	0 9 0 - 7 L 2 0 ⬍ K 0 ◪ 4 1
	3500 K	652 lm	105 lm/W	0 9 0 - 7 L 2 2 ⬍ K 0 ◪ 4 1
	4000 K	665 lm	107 lm/W	0 9 0 - 7 L 2 1 ⬍ K 0 ◪ 4 1

MEDIUM ROUND 34°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	676 lm	109 lm/W	0 9 0 - 7 L 2 9 ⬍ B 0 ◪ 4 1
	3000 K	676 lm	109 lm/W	0 9 0 - 7 L 2 0 ⬍ B 0 ◪ 4 1
	3500 K	705 lm	114 lm/W	0 9 0 - 7 L 2 2 ⬍ B 0 ◪ 4 1
	4000 K	719 lm	116 lm/W	0 9 0 - 7 L 2 1 ⬍ B 0 ◪ 4 1

FLOOD ROUND 47°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	723 lm	117 lm/W	0 9 0 - 7 L 2 9 ⬍ C 0 ◪ 4 1
	3000 K	723 lm	117 lm/W	0 9 0 - 7 L 2 0 ⬍ C 0 ◪ 4 1
	3500 K	753 lm	121 lm/W	0 9 0 - 7 L 2 2 ⬍ C 0 ◪ 4 1
	4000 K	768 lm	124 lm/W	0 9 0 - 7 L 2 1 ⬍ C 0 ◪ 4 1

WIDE FLOOD ROUND 67°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	734 lm	118 lm/W	0 9 0 - 7 L 2 9 ⬍ D 0 ◪ 4 1
	3000 K	734 lm	118 lm/W	0 9 0 - 7 L 2 0 ⬍ D 0 ◪ 4 1
	3500 K	764 lm	123 lm/W	0 9 0 - 7 L 2 2 ⬍ D 0 ◪ 4 1
	4000 K	780 lm	126 lm/W	0 9 0 - 7 L 2 1 ⬍ D 0 ◪ 4 1

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	659 lm	106 lm/W	0 9 0 - 7 L 2 9 ⬍ E 0 ◪ 4 1
	3000 K	659 lm	106 lm/W	0 9 0 - 7 L 2 0 ⬍ E 0 ◪ 4 1
	3500 K	686 lm	111 lm/W	0 9 0 - 7 L 2 2 ⬍ E 0 ◪ 4 1
	4000 K	700 lm	113 lm/W	0 9 0 - 7 L 2 1 ⬍ E 0 ◪ 4 1

FLOOD SQUARE 55°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	735 lm	119 lm/W	0 9 0 - 7 L 2 9 ⬍ F 0 ◪ 4 1
	3000 K	735 lm	119 lm/W	0 9 0 - 7 L 2 0 ⬍ F 0 ◪ 4 1
	3500 K	766 lm	124 lm/W	0 9 0 - 7 L 2 2 ⬍ F 0 ◪ 4 1
	4000 K	781 lm	126 lm/W	0 9 0 - 7 L 2 1 ⬍ F 0 ◪ 4 1

Order options

CONTROL ⬍		COLOUR ◪	
non DIM	1	chrome reflector	0
DALI-2	3	black reflector	B

RECTANGULAR MEDIUM 31°x67°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	708 lm	114 lm/W	0 9 0 - 7 L 2 9 ⇕ R 0 ◪ 4 1
	3000 K	708 lm	114 lm/W	0 9 0 - 7 L 2 0 ⇕ R 0 ◪ 4 1
	3500 K	738 lm	119 lm/W	0 9 0 - 7 L 2 2 ⇕ R 0 ◪ 4 1
	4000 K	752 lm	121 lm/W	0 9 0 - 7 L 2 1 ⇕ R 0 ◪ 4 1

WIDE FLOOD SQUARE 70°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	740 lm	119 lm/W	0 9 0 - 7 L 2 9 ⇕ G 0 ◪ 4 1
	3000 K	740 lm	119 lm/W	0 9 0 - 7 L 2 0 ⇕ G 0 ◪ 4 1
	3500 K	771 lm	124 lm/W	0 9 0 - 7 L 2 2 ⇕ G 0 ◪ 4 1
	4000 K	786 lm	127 lm/W	0 9 0 - 7 L 2 1 ⇕ G 0 ◪ 4 1

WALLWASHER chrome reflector, CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	570 lm	92 lm/W	0 9 0 - 7 L 2 9 ⇕ A 0 0 4 2
	3000 K	570 lm	92 lm/W	0 9 0 - 7 L 2 0 ⇕ A 0 0 4 2
	3500 K	594 lm	96 lm/W	0 9 0 - 7 L 2 2 ⇕ A 0 0 4 2
	4000 K	606 lm	98 lm/W	0 9 0 - 7 L 2 1 ⇕ A 0 0 4 2

WALL FLOOR CRI ≥ 90


SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	671 lm	108 lm/W	0 9 0 - 7 L 2 9 ⇕ W 0 ◪ 4 2
	3000 K	671 lm	108 lm/W	0 9 0 - 7 L 2 0 ⇕ W 0 ◪ 4 2
	3500 K	699 lm	113 lm/W	0 9 0 - 7 L 2 2 ⇕ W 0 ◪ 4 2
	4000 K	713 lm	115 lm/W	0 9 0 - 7 L 2 1 ⇕ W 0 ◪ 4 2







UNICO L3



MEDIUM ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	0 9 0 - 7 L 3 9 ⇕ B 0 ◪ 4 1
	3000 K	lm	0 9 0 - 7 L 3 0 ⇕ B 0 ◪ 4 1
	3500 K	lm	0 9 0 - 7 L 3 2 ⇕ B 0 ◪ 4 1
	4000 K	lm	0 9 0 - 7 L 3 1 ⇕ B 0 ◪ 4 1

FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	0 9 0 - 7 L 3 9 ⇕ C 0 ◪ 4 1
	3000 K	lm	0 9 0 - 7 L 3 0 ⇕ C 0 ◪ 4 1
	3500 K	lm	0 9 0 - 7 L 3 2 ⇕ C 0 ◪ 4 1
	4000 K	lm	0 9 0 - 7 L 3 1 ⇕ C 0 ◪ 4 1

Order options

CONTROL	⇕	COLOUR	◪	COLOUR	
non DIM	1	chrome reflector	0	jet black	RAL 9005
DALI-2	3	black reflector	B	traffic white	RAL 9016

WIDE FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39 ⇕ D0 ◪ 41
	3000 K	lm	090-7L30 ⇕ D0 ◪ 41
	3500 K	lm	090-7L32 ⇕ D0 ◪ 41
	4000 K	lm	090-7L31 ⇕ D0 ◪ 41

SPOT ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39 ⇕ K0 ◪ 41
	3000 K	lm	090-7L30 ⇕ K0 ◪ 41
	3500 K	lm	090-7L32 ⇕ K0 ◪ 41
	4000 K	lm	090-7L31 ⇕ K0 ◪ 41

MEDIUM SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39 ⇕ E0 ◪ 41
	3000 K	lm	090-7L30 ⇕ E0 ◪ 41
	3500 K	lm	090-7L32 ⇕ E0 ◪ 41
	4000 K	lm	090-7L31 ⇕ E0 ◪ 41

FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39 ⇕ F0 ◪ 41
	3000 K	lm	090-7L30 ⇕ F0 ◪ 41
	3500 K	lm	090-7L32 ⇕ F0 ◪ 41
	4000 K	lm	090-7L31 ⇕ F0 ◪ 41

WIDE FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39 ⇕ G0 ◪ 41
	3000 K	lm	090-7L30 ⇕ G0 ◪ 41
	3500 K	lm	090-7L32 ⇕ G0 ◪ 41
	4000 K	lm	090-7L31 ⇕ G0 ◪ 41

WALLWASHER chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	856 lm	090-7L39 ⇕ A0041
	3000 K	856 lm	090-7L30 ⇕ A0041
	3500 K	891 lm	090-7L32 ⇕ A0041
	4000 K	909 lm	090-7L31 ⇕ A0041


Order options

CONTROL	⇕
non DIM	1
DALI-2	3

COLOUR	◪
chrome reflector	0
black reflector	B

COLOUR	
jet black	RAL 9005
traffic white	RAL 9016

Electrical mounting accessories (optional)




THROUGH WIRING CONNECTION BOX

TYPE	L·W·H (mm)	ORDER CODE
non DIM cable ø 4 – 12 mm	105·58·30	005-253111 10
DALI cable ø 4 – 12 mm	105·58·30	005-255111 10

Linect®-Ready


Mounting accessories (required)



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	85·47·47	090-7L201 00

for UNICO L2 and UNICO wall recessed 1 lamp



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	122·47·47	090-7L301 00

for UNICO L3



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	101·63·30	090-7L2020B
traffic white	101·63·30	090-7L2020W

for UNICO L2 and UNICO wall recessed 1 lamp



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	138·63·30	090-7L3020B
traffic white	138·63·30	090-7L3020W


for UNICO L3

Mounting tools accessories (optional)

DISMOUNTING TOOL

L·W·H (mm)	ORDER CODE
70·30·2	090-002100

Electrical accessories (optional)



POWER SUPPLY pre-wired

Available in the configurator — see POWER SUPPLY PRE-WIRED

Order options

COLOUR

jet black	RAL 9005
traffic white	RAL 9016

Benaki Museum Shop, Navarino Agora

Griechenland

Architekt
STUDIOLAV and
Kostantia Manthou

Fotograf
Manos Chatzikonstantis



Verwendete Produkte



UNICO L2 / L3
recessed

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


NELLY'S
NELLY'S







BENAKI
MUSEUM
SHOP

Forschungsbau Weltbeziehungen Universität Erfurt

Deutschland

Lighting Design
lichtraum

Fotograf
Steven Neukirch
Fotografie

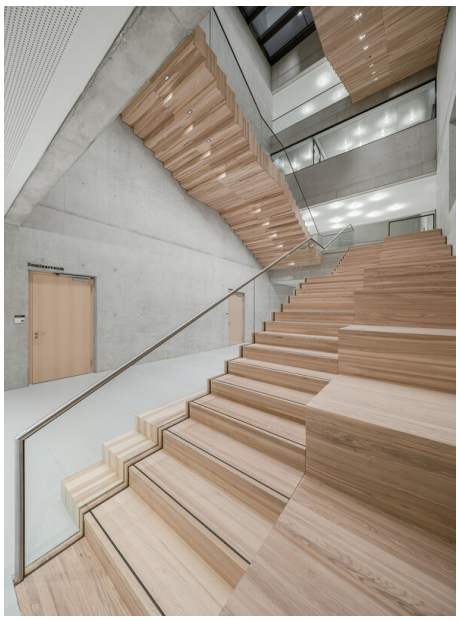

Verwendete Produkte





LENO surface



UNICO L2 / L3 recessed

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

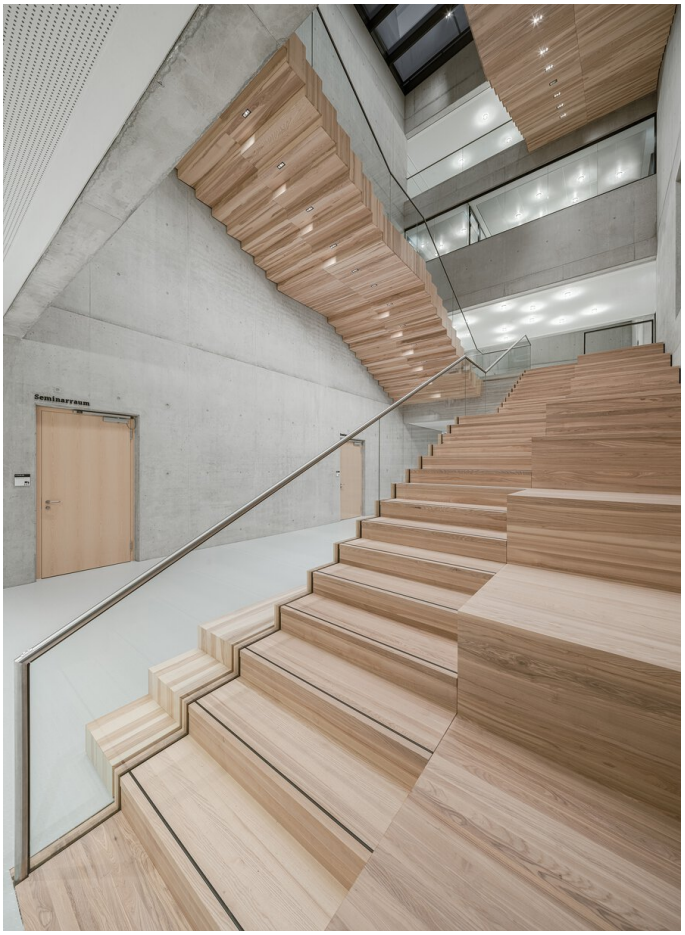
Seminarraum

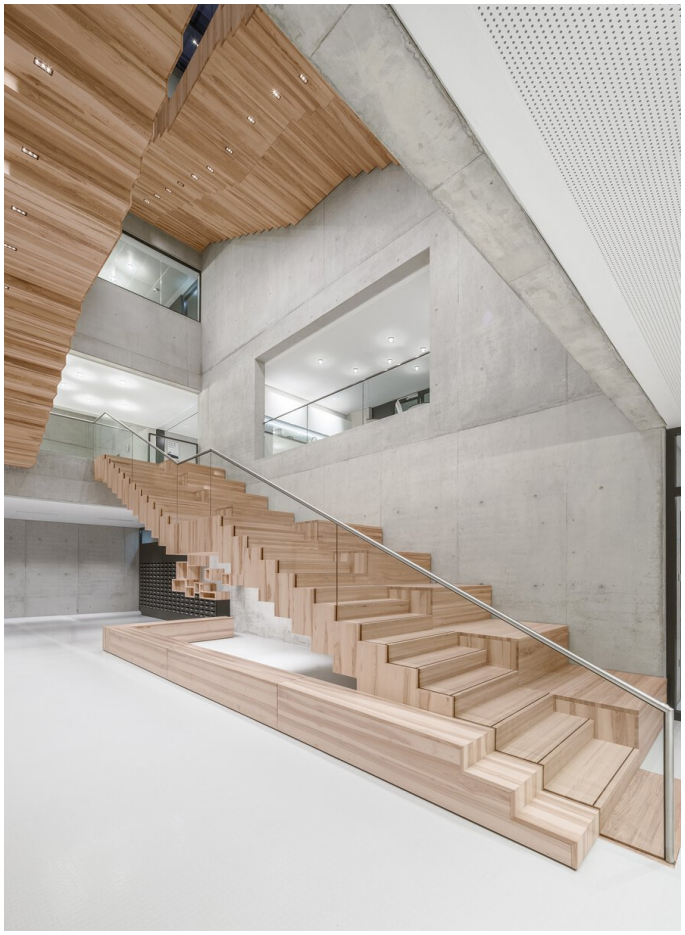




Beratungsraum 02.46
Meeting Room