



Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
CRI ≥ 90 / 2 SDCM (initial MacAdam)
UGR ≤ 10, UGR ≤ 16, UGR ≤ 19, UGR ≤ 22, UGR ≤ 25
bis zu 127 lm/W
L90 / 50000 h
DALI-2, nicht dimmbar
front IP20

Types



Farben



Montage Set



Lichtverteilung



UNICO L2 / L3

recessed

EN Rectangular recessed multi-downlight made of die-cast aluminium; equipped with two (L2) / three (L3) individually selectable or pre-specified, customised light elements; installation without tools in mounting set with ball catch system; easy electrical installation by means of reverse polarity protected plug-in connections; suitable for ceiling thickness of 2-25 mm; surface powder coated; installation possible in different housings; high quality reflector with micro-faceted, aluminium-vaporised surface; precise radiation characteristic with different symmetrical light distributions; or with asymmetric light distribution; energy-efficient high power LEDs with very good colour rendering

DE Rechteckiger Einbau-Multi-Downlight aus Aluminiumdruckguss; bestückt mit zwei (L2) / drei (L3) individuell wählbaren oder fix definierten, anwendungsspezifischen Optiken; werkzeuglose Montage im Montageset durch Kugelschnappsystem; einfache elektrische Montage durch verpolungssichere Steckverbindung; geeignet für Deckenstärken von 2-25 mm; Oberfläche pulverbeschichtet; Einbau in unterschiedlichen Gehäusen möglich; hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; präzise Abstrahlcharakteristik mit unterschiedlichen symmetrischen Lichtverteilungen; oder mit asymmetrischer Lichtverteilung; energieeffiziente High-Power-LEDs mit sehr guter Farbwiedergabe



black & chrome reflector



one luminaire multiple scenes



up to 145 lm/W (high efficiency)



tunable white 2700 – 5000 K (optional)







UNICO L2

CRI ≥ 90 · 2 SDCM · UGR ≤ 10 · cd/m² ≤ 1500 · 1 ADDR. · X-PERT · X-PERT

SPOT ROUND 19°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	626 lm	101 lm/W	090-7L29 ⇕ K0◪41
	3000 K	626 lm	101 lm/W	090-7L20 ⇕ K0◪41
	3500 K	652 lm	105 lm/W	090-7L22 ⇕ K0◪41
	4000 K	665 lm	107 lm/W	090-7L21 ⇕ K0◪41

MEDIUM ROUND 34°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	676 lm	109 lm/W	090-7L29 ⇕ B0◪41
	3000 K	676 lm	109 lm/W	090-7L20 ⇕ B0◪41
	3500 K	705 lm	114 lm/W	090-7L22 ⇕ B0◪41
	4000 K	719 lm	116 lm/W	090-7L21 ⇕ B0◪41

FLOOD ROUND 47°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	723 lm	117 lm/W	090-7L29 ⇕ C0◪41
	3000 K	723 lm	117 lm/W	090-7L20 ⇕ C0◪41
	3500 K	753 lm	121 lm/W	090-7L22 ⇕ C0◪41
	4000 K	768 lm	124 lm/W	090-7L21 ⇕ C0◪41

WIDE FLOOD ROUND 67°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	734 lm	118 lm/W	090-7L29 ⇕ D0◪41
	3000 K	734 lm	118 lm/W	090-7L20 ⇕ D0◪41
	3500 K	764 lm	123 lm/W	090-7L22 ⇕ D0◪41
	4000 K	780 lm	126 lm/W	090-7L21 ⇕ D0◪41

MEDIUM SQUARE 32°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	659 lm	106 lm/W	090-7L29 ⇕ E0◪41
	3000 K	659 lm	106 lm/W	090-7L20 ⇕ E0◪41
	3500 K	686 lm	111 lm/W	090-7L22 ⇕ E0◪41
	4000 K	700 lm	113 lm/W	090-7L21 ⇕ E0◪41

Order options

CONTROL ⇕		COLOUR ◪	
non DIM	1	chrome reflector	0
DALI-2	3	black reflector	B

FLOOD SQUARE 55°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	735 lm	119 lm/W	090-7L29 F0 41
	3000 K	735 lm	119 lm/W	090-7L20 F0 41
	3500 K	766 lm	124 lm/W	090-7L22 F0 41
	4000 K	781 lm	126 lm/W	090-7L21 F0 41

RECTANGULAR MEDIUM 31°x67°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	708 lm	114 lm/W	090-7L29 R0 41
	3000 K	708 lm	114 lm/W	090-7L20 R0 41
	3500 K	738 lm	119 lm/W	090-7L22 R0 41
	4000 K	752 lm	121 lm/W	090-7L21 R0 41

WIDE FLOOD SQUARE 70°, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	740 lm	119 lm/W	090-7L29 G0 41
	3000 K	740 lm	119 lm/W	090-7L20 G0 41
	3500 K	771 lm	124 lm/W	090-7L22 G0 41
	4000 K	786 lm	127 lm/W	090-7L21 G0 41

WALLWASHER chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	570 lm	92 lm/W	090-7L29 A0042
	3000 K	570 lm	92 lm/W	090-7L20 A0042
	3500 K	594 lm	96 lm/W	090-7L22 A0042
	4000 K	606 lm	98 lm/W	090-7L21 A0042

WALL FLOOR CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	EFFICACY	ORDER CODE
6.2 W	2700 K	671 lm	108 lm/W	090-7L29 W0 42
	3000 K	671 lm	108 lm/W	090-7L20 W0 42
	3500 K	699 lm	113 lm/W	090-7L22 W0 42
	4000 K	713 lm	115 lm/W	090-7L21 W0 42

Order options

CONTROL		COLOUR		COLOUR	
non DIM	1	chrome reflector	0	jet black	RAL 9005
DALI-2	3	black reflector	B	traffic white	RAL 9016







UNICO L3



MEDIUM ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆B0◪41
	3000 K	lm	090-7L30◆B0◪41
	3500 K	lm	090-7L32◆B0◪41
	4000 K	lm	090-7L31◆B0◪41

FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆C0◪41
	3000 K	lm	090-7L30◆C0◪41
	3500 K	lm	090-7L32◆C0◪41
	4000 K	lm	090-7L31◆C0◪41

WIDE FLOOD ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆D0◪41
	3000 K	lm	090-7L30◆D0◪41
	3500 K	lm	090-7L32◆D0◪41
	4000 K	lm	090-7L31◆D0◪41

SPOT ROUND CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆K0◪41
	3000 K	lm	090-7L30◆K0◪41
	3500 K	lm	090-7L32◆K0◪41
	4000 K	lm	090-7L31◆K0◪41

MEDIUM SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39◆E0◪41
	3000 K	lm	090-7L30◆E0◪41
	3500 K	lm	090-7L32◆E0◪41
	4000 K	lm	090-7L31◆E0◪41

Order options

CONTROL ◆		COLOUR ◪	
non DIM	1	chrome reflector	0
DALI-2	3	black reflector	B

FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39 ⇕ F0 ◪ 41
	3000 K	lm	090-7L30 ⇕ F0 ◪ 41
	3500 K	lm	090-7L32 ⇕ F0 ◪ 41
	4000 K	lm	090-7L31 ⇕ F0 ◪ 41

WIDE FLOOD SQUARE CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	lm	090-7L39 ⇕ G0 ◪ 41
	3000 K	lm	090-7L30 ⇕ G0 ◪ 41
	3500 K	lm	090-7L32 ⇕ G0 ◪ 41
	4000 K	lm	090-7L31 ⇕ G0 ◪ 41

WALLWASHER chrome reflector, CRI ≥ 90

SYSTEM	COLOUR TEMP.	LUM. FLUX	ORDER CODE
8.7 W	2700 K	856 lm	090-7L39 ⇕ A0041
	3000 K	856 lm	090-7L30 ⇕ A0041
	3500 K	891 lm	090-7L32 ⇕ A0041
	4000 K	909 lm	090-7L31 ⇕ A0041

Electrical mounting accessories (optional)



THROUGH WIRING CONNECTION BOX

TYPE	L·W·H (mm)	ORDER CODE
non DIM cable ø 4 – 12 mm	105·58·30	005-253 1110
DALI cable ø 4 – 12 mm	105·58·30	005-255 1110

Linect®-Ready

Mounting accessories (required)



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	85·47·47	090-7L20100

for UNICO L2 and UNICO wall recessed 1 lamp



MOUNTING SET trimless for plasterboard ceilings

PLASTERBOARD CEILING THICKNESS	L·W·H (mm)	ORDER CODE
12.5/15/20/25 mm	122·47·47	090-7L30100

for UNICO L3

Order options

CONTROL	⇕	COLOUR	◪	COLOUR	
non DIM	1	chrome reflector	0	jet black	RAL 9005
DALI-2	3	black reflector	B	traffic white	RAL 9016



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	101·63·30	090-7L2020B
traffic white	101·63·30	090-7L2020W

for UNICO L2 and UNICO wall recessed 1 lamp



MOUNTING SET with trim for intermediate ceilings, 2-25 mm

COLOUR	L·W·H (mm)	ORDER CODE
jet black	138·63·30	090-7L3020B
traffic white	138·63·30	090-7L3020W

for UNICO L3

Mounting tools accessories (optional)

DISMOUNTING TOOL

L·W·H (mm)	ORDER CODE
70·30·2	090-002100

Electrical accessories (optional)



POWER SUPPLY pre-wired

Available in the configurator — see POWER SUPPLY PRE-WIRED

Order options

COLOUR

jet black	RAL 9005
traffic white	RAL 9016

Benaki Museum Shop, Navarino Agora

Griechenland

Architekt
STUDIOLAV and
Kostantia Manthou

Fotograf
Manos Chatzikonstantis



Verwendete Produkte



UNICO L2 / L3
recessed

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com


NELLY'S
NELLY'S






BENAKI
MUSEUM
SHOP

Forschungsbau Weltbeziehungen Universität Erfurt

Deutschland

Lighting Design
lichtraum

Fotograf
Steven Neukirch
Fotografie

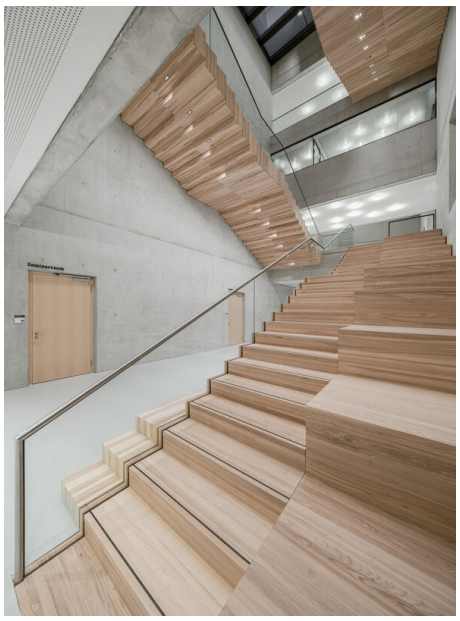

Verwendete Produkte



LENO surface



UNICO L2 / L3 recessed

No liability is assumed for typographical or printing errors.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

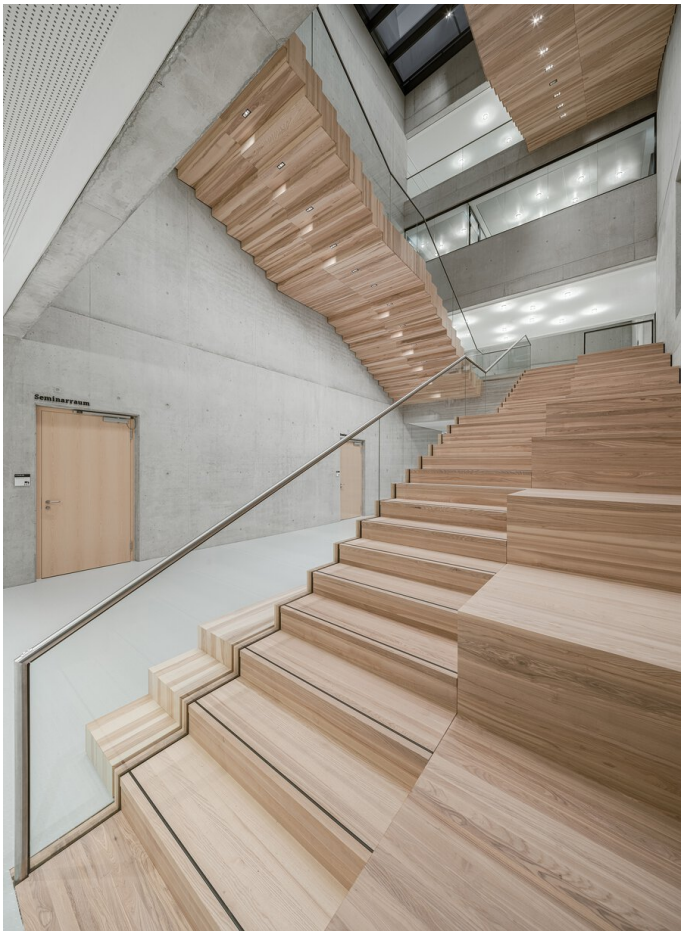
Seminarraum

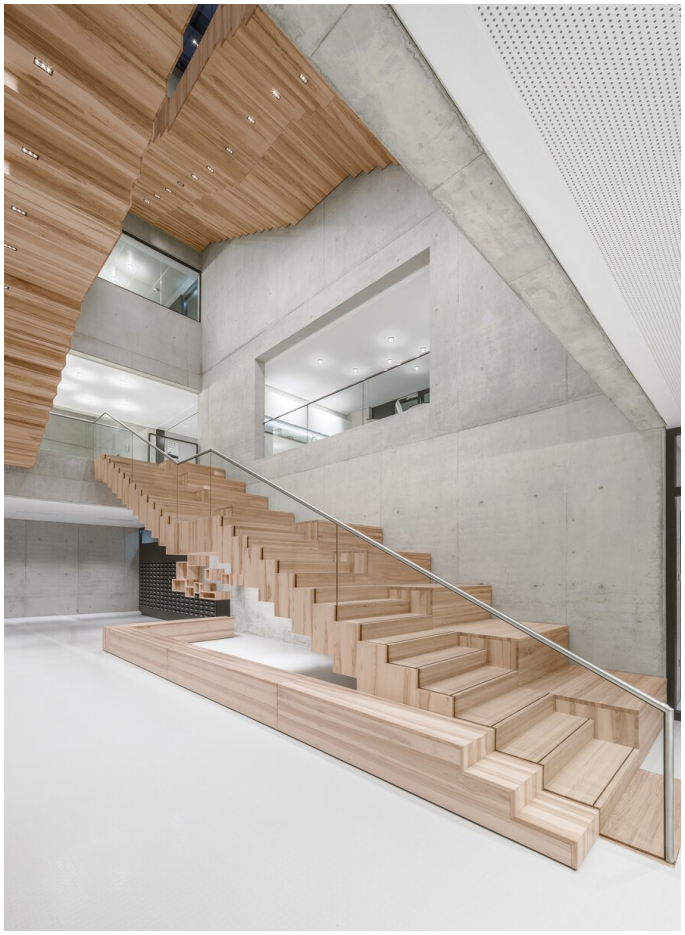




Beratungsraum 02.46
Meeting Room