



Environmental Product Declaration

EPD of multiple products, based on a representative product in accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

ANDRO IQ

from XAL GmbH

Including all variants of ANDRO

Included products are specified on page 4

Products recently / not yet on the market – Results of this EPD shall be used with care as the LCI data is not yet based on 1 year of production which may result in increased uncertainty.

Programme

The International EPD® System
www.environdec.com

Programme operator

EPD International AB

EPD registration number EPD-IES-0026025:001

Version date 2025-10-22

Validity date 2030-10-21



This EPD follows additional requirements for construction products considered as Electronic or Electric Equipment. An EPD may be updated or republished if conditions change. To find the latest version of the EPD and to confirm its validity, see www.environdec.com.


THE INTERNATIONAL EPD® SYSTEM



Programme information

Programme	The International EPD® System
Address	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website	www.environdec.com
E-mail	support@environdec.com

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product Category Rules (PCR)

PCR 2019:14 Construction products version 2.0.1, 2025-06-05
UN CPC code(s): 4653 (Ver. 2.1) Lighting Equipment

PCR review was conducted by

The Technical Committee of the International EPD® System
Review Chair: Rob Rouwette (chair), Noa Meron (co-chair)
The review panel may be contacted via support@environdec.com.

Life Cycle Assessment (LCA) accountability

XAL GmbH, Auer-Welsbach-Gasse 36, 8055 Graz, Austria

Individual EPD verification without a pre-verified LCA/EPD tool

Third-party verifier:

Elisabet Amat Guasch
GREENIZE Projects
eamat@greenize.es

Procedure for follow-up of data during EPD validity involves third-party verifier:

☒ Yes ☐ No

Approved by

The International EPD® System


The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Owner of the EPD

XAL GmbH
Auer-Welsbach-Gasse 36
8055 Graz
AUSTRIA

epd@xal.com

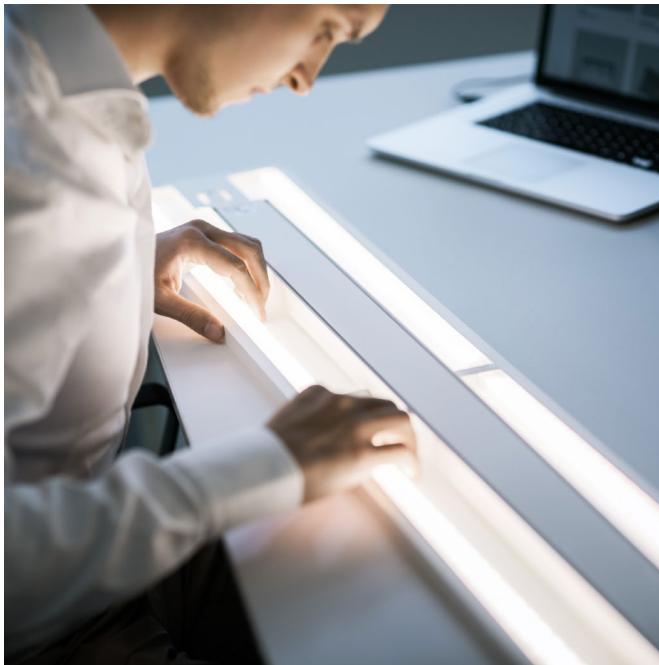

Description of the organisation

XAL is an internationally operating manufacturer of high-end luminaires and lighting solutions for shop, office, hotel and residential lighting. For 30 years, XAL has been working with lighting designers, architects and planners to develop custom luminaires of the highest technical standard, with a focus on style and aesthetics. While XAL mainly targets B2B costumers, we also provide our standard portfolio to B2C costumers.

With its headquarters in Graz, Austria, the XAL Group currently employs 1300 people worldwide and has 30 international subsidiaries. We are continuously working on further improving our products – whether in terms of durability, efficiency, the carbon footprint, or also with regard to the replaceability and reusability of components and materials.

Product-related or management system-related certifications

XAL is certified according to several management and CSR standards.

- **ISO 9001** – Quality management systems
- **ISO 14001** – Environmental management systems
- **ISO 45001** – Occupational health and safety management systems
- **Ecovadis** – regular evaluation of our corporate social responsibility based on objective criteria with a focus on the environment, labour and human rights, ethics and responsible procurement.
- **UN Global Compact initiative** – our interactions with each other and our stakeholders, our supply chain management and our resource strategies are guided by the principles of the UN Global compact.

Name and location of production site(s)

The production sites are located in Murska Sobota (XAL Svetila d.o.o., Slovenia) and in Graz (XAL GmbH, Austria).

The production facilities operate in a complementary manner, with each product passing through both facilities.

More information
xal.com

Product name

ANDRO IQ

Product identification

Ceiling recessed luminaire with opal, microprismatic and lens optical, available in different sizes. This EPD covers multiple products:

- **ANDRO** opal / microprismatic low power (reference product)
- **ANDRO** opal / microprismatic high power
- **ANDRO** opal / microprismatic low power IP54
- **ANDRO** opal / microprismatic high power IP54
- **ANDRO** lens low power

All variants are available with CRI ≥ 80 and CRI ≥ 90 . Optic opal microprismatic or lens; made from ASA; plain surface; no texture; round installation housing; IP20; non DIM and DALI-2 versions; DALI-2 variants also available with IP54 glass cover; Cut out diameters: 160-175 mm, 180-195 mm, 200-215 mm, 220-235 mm. Scaling factors for all variants can be found in the Annex of the EPD.

Product description

Luminaire housing made from ASA, direct light distribution; plain surface, no texture; installation without tools using wings; round installation housing; no passive cooling of the LED board required; no appearance of multiple shadows; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; IP20; IP54 for DALI versions; LED board replaceable by an authorized professional; control gear replaceable by an authorized professional; Available with cut out diameters: 160-175 mm, 180-195 mm, 200-215 mm, 220-235 mm.

Technical specifications

Specification	ANDRO opal/mp low power 180mm (reference product)	ANDRO opal/mp high power	ANDRO lens low power
System power	16.9 W	23.7 W	16.9 W
Luminous efficacy	up to 143 lm/W	up to 143 lm/W	up to 143 lm/W
Colour temperature	3000 K, 4000 K	3000 K, 4000 K	3000 K, 4000 K
Electrical	non DIM, DALI-2	non DIM, DALI-2	non DIM, DALI-2
Protection index	IP20, IP54	IP20, IP54	IP20
Physical	cut-out diameter 180-195 mm outer diameter 210 mm height 57 mm	cut-out diameter 180-195 mm outer diameter 210 mm height 57 mm	cut-out diameter 180-195 mm outer diameter 210 mm height 57 mm

Technical data was tested in house according to following standards:

- EN 13032-1: 2004 +A1: 2012
- EN 13032-4: 2015 +A1: 2019
- CIE S 025/E: 2015
- IES LM-79-19: 2019

UN CPC code(s):

- 4653 (Ver. 2.1) Lighting Equipment

Declared unit

The declared unit is one piece of **ANDRO** opal/mp low power 180mm. The weight of the product per declared unit is 0.46 kg.

For better comparison with other types of luminaires, conversion factors are also available to convert the results to 1000 lumens during a reference lifetime of 35000 hours. The conversion factors are available under “Additional environmental information”.

The principles of “modularity” and “polluter pays” have been followed.


Reference service life
14 years

Time representativeness
2024

Database(s) and LCA software used
LCA for Experts 10.9.17

Description of system boundaries
cradle-to-grave and module D

System Diagram

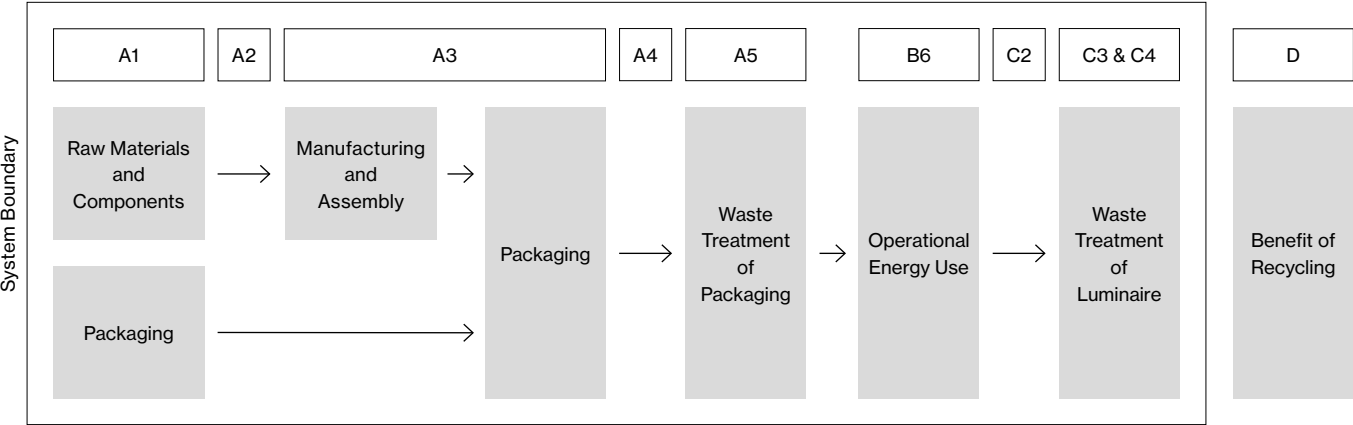

Allocation

Allocation was performed to determine the quantities of flows commonly associated with the factory, including electricity for general operations and packaging, the use of packaging materials (such as wooden pallets and polyethylene film), and packaging waste from purchased components.

Weighted distance	745 km
Truck used	Class EURO 6, 26-28 t
Fuel type	Diesel (0.00287l/100 kkm)

Product stage (A1 – A3)

Raw materials are found in the components used for the luminaire production. The raw materials and the necessary process steps have been modelled using LCA for Experts. The 3D-Printing of the housing as well as the population of the PCB is done in Graz, Austria. Packaging and the final assembly of the luminaire is done in Murska Sobota, Slovenia. The corresponding electricity mix has been used for all manufacturing steps. Transportation of all the components is incorporated. For the components which are delivered from China, aggregated data has been used, since transportation involved various routes and transport vehicles. Packaging for the components has been accounted for using a worst-case approach.

Transport to building (A4)

The transport is calculated from Graz, Austria to the capitals of the countries with expected sales shares >4% (Berlin, Vienna, Zurich, Rome, Paris, Copenhagen). The product market includes countries all over the world.

Installation into building (A5)

No emissions occur during the installation. This module includes the waste treatment of the packaging. For the transport-packaging, the euro pallet is reused 28 times, therefore only 1/28 of the weight is taken into account for the production and the end of life of the pallet. This is an assumption derived from the PEP Eco Passport rules (PSR-0014-ed2.0-EN-2023 07 13). Packaging waste incl. transport packaging:

Material	Weight (kg)
Cardboard	0.216
Wooden Pallet	0.004
Paper	0.011

Use, maintenance, repair, replacement and refurbishment (B1, B2, B3, B4, B5)

These stages include the use, maintenance, repair, replacement and refurbishment of the product, which do not contribute to the environmental impacts of the products functional unit.

Operational Energy Use (B6)

Electricity consumption during the use stage is modelled based on the technical parameters of the luminaires and is representative for a weighted average of the following applications – office (60%), hotel (20%), restaurant (20%) with an average lifetime of 14 years. Geography of the electricity mix is modelled by expected sales shares and is representative for European countries (92% - EU-28) and rest of world countries (8%). For the rest of world countries, an electricity mix for China is used following a worst-case approach. For variants with optical light sensors, the energy consumption has been adjusted as recommended in the guidelines of PSR-0014-ed2.0-EN-2023 07 13.

The energy consumption is calculated using the formula from EN 15193:2007: **Energy consumption [kWh] = {Pa × FCP × FO × (FD × tD + FN × tN) + Pp × ty} × 1/1.000 × a**

The results and additional Use Phase Information is presented in the table below:

Scenario	ANDRO opal/mp low power	
	180mm	Unit
Electricity use (14 years)	771.12	kWh
Active power	16.9	W
Total active time	42000	hours
Total passive time	80640	hours
Dimmable	non DIM, DALI-2	-
Presence control	No	-

Operational water use (B7)

No water is consumed during the use stage. Therefore this stage does not contribute to the environmental impacts of the products functional unit.

End-of-life stage (C1 – C4)

The product is presumed to be decomposed manually; therefore, no emissions should occur in C1. In accordance with PCR 2.0.1, the following transport distances are used for end-of-life waste treatment:

- Waste not destined for incineration: 80 km
- Waste destined for incineration: 130 km

Based on official statistics and literature, waste treatment options are taken into account for Europe and rest of the world countries.

Scenario	ANDRO opal/mp low power	
	180mm	Unit
Collected separately	0.46	kg
Collected with mixed (construction) waste	-	kg
For reuse	-	kg
For recycling	0.09	kg
For energy recovery	0.23	kg
For final disposal	0.14	kg

Module D

According to the guidelines of EN 15804+A2 and the PCR from EPD International, calculations are made for Module D. The loads and benefits result from the export of secondary materials and the energy which comes from incineration. In Module D also the benefits from the product packaging waste are included.

Scenario (contributing materials, incl. packaging)	ANDRO opal/mp low power 180mm	Unit
Materials for recycling	0.27	kg
Materials for export of secondary fuels	-	kg
Materials for incineration	0.26	kg

Cut-off rules

Consistent with the PCR, a minimum of 95% of total inflows (mass and energy) are included. In addition, materials and processes with insignificant contributions of less than 1% are also included. For the use and end-of-life stage, scenarios are used, factoring in geographical conditions (such as electricity mix) and applications (waste treatment practices).

The following processes have been excluded:

- Manufacture of equipment used in production, buildings or any other capital goods;
- The transportation of personnel to the plant;
- Transportation of personnel within the plant;
- Research and development activities;
- Long-term emissions.

Data quality

This LCA study reflects the production for 2025, while overhead electricity consumption is based on 2024 data. Components are sourced from external suppliers, and their manufacturing processes are modeled using LCA for Experts, applying the most suitable representative geographical conditions and applications. Geographical representativeness is global, mainly Europe. Since the included products are either recently or not yet on the market, LCI data is not based on a full year of production. Results of this EPD shall be used with care. Besides production data, data quality is very good / good.

Electricity grid

For the manufacturing in Graz, Austria, the corresponding electricity grid mix as stated on the invoice is used: Biomass (65.64%), Solar (25.28%) other RE (9.08%).

For Murska Sobota, Slovenia, the corresponding electricity grid mix is: Hydro Power (57.86%), Solar (42.14%).

Environmental impact of the electricity used in	AUT	SLO
CO ₂ eq. [kg/kWh]	0.031	0.015

**Modules declared, geographical scope, share of specific data
(in GWP-GHG results) and data variation (in GWP-GHG results):**

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Geography	GLO	GLO	AUT, SLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO
Primary data used	28.96%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	-6% / +28%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Acronyms	GLO = Global, AUT = Austria, SLO = Slovenia																

Primary data used

The share of primary data is calculated based on GWP-GHG results. It is a simplified indicator for data quality that supports the use of more primary data, to increase the representativeness of and comparability between EPDs. Note that the indicator does not capture all relevant aspects of data quality and is not comparable across product categories.

Calculation of primary data used for module A1-A3:

Process	Source Type	Source	Reference Year	Data Category	Share of primary data of GWP-GHG results for A1-A3
Transport of materials to manufacturing site	Collected data	EPD Owner, Suppliers	2024	Primary data	25.92%
Others	Collected data	EPD Owner	2024	Primary data	3.04%
Total share of primary data of GWP-GHG results for A1-A3					28.96%

Content information

Product components	Weight. kg	Weight-% (versus total weight)	Post-consumer material. weight-%	Biogenic material. weight-% / declared unit	Biogenic material. kg C / declared unit
Polyamide 6 (PA6)	0.11	23.75	0.00	0.00	0.00
Acrylnitril-Styrol-Acrylat (ASA)	0.10	21.53	0.00	0.00	0.00
Copper	0.06	12.89	0.00	0.00	0.00
Polymethylmethacrylate (PMMA)	0.06	12.49	0.00	0.00	0.00
Epoxy resin	0.04	8.11	0.00	0.00	0.00
Glass	0.03	6.62	0.00	0.00	0.00
Polycarbonate	0.03	5.65	0.00	0.00	0.00
Glass fibers	0.01	2.36	0.00	0.00	0.00
Tin	0.01	1.58	0.00	0.00	0.00
Polyvinyl chloride (PVC)	0.005	1.03	0.00	0.00	0.00
Others (<1%)	0.02	3.99	0.00	0.00	0.00
TOTAL	0.46	100.00	0.00	0.00	0.00

Packaging materials*	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C / declared unit
Paper	0.011	2.39	0.006
Cardboard	0.079	16.96	0.04
TOTAL	0.09	19.35	0.046

The products do not contain any REACH and RoHS SVHC substances in amounts greater than 0.1 % (1000ppm).

* Disclaimer: The packaging material table includes only product packaging. Transport packaging also included in the LCA.

Results of the environmental performance indicators



The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

The results of the end-of-life stage (modules C1-C4) should be considered when using the results of the product stage (modules A1-A3).

Mandatory impact category indicators according to EN 15804 + A2 (based on EF 3.1)

Results per piece of ANDRO low power opal/mp 180 mm												
Indicator	Unit	A1 – A3	A4	A5	B1 – B5	B6	B7	C1	C2	C3	C4	D
GWP – fossil	kg CO ₂ eq.	1.01E+01	8.40E-02	1.20E-02	0.00E+00	2.70E+02	0.00E+00	0.00E+00	7.19E-03	7.41E-01	3.33E-03	-6.98E-01
GWP – biogenic	kg CO ₂ eq.	-4.29E-01	0.00E+00	4.29E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GWP – luluc	kg CO ₂ eq.	1.79E-02	8.96E-04	5.78E-05	0.00E+00	8.84E-01	0.00E+00	0.00E+00	7.67E-05	5.66E-05	6.23E-06	-6.13E-04
GWP – total	kg CO₂ eq.	9.73E+00	8.49E-02	4.41E-01	0.00E+00	2.71E+02	0.00E+00	0.00E+00	7.27E-03	7.42E-01	3.33E-03	-6.99E-01
ODP	kg CFC 11 eq.	1.96E-09	1.03E-14	1.66E-14	0.00E+00	5.38E-09	0.00E+00	0.00E+00	8.79E-16	4.69E-13	7.94E-15	-1.74E-11
AP	mol H+ eq.	4.69E-02	1.36E-04	2.89E-05	0.00E+00	6.55E-01	0.00E+00	0.00E+00	1.17E-05	1.74E-04	2.39E-05	-7.21E-03
EP – freshwater	kg P eq.	1.02E-04	2.35E-07	2.17E-07	0.00E+00	5.05E-04	0.00E+00	0.00E+00	2.01E-08	8.06E-08	5.72E-09	1.17E-08
EP – marine	kg N eq.	1.16E-02	5.55E-05	1.29E-05	0.00E+00	1.53E-01	0.00E+00	0.00E+00	4.75E-06	4.72E-05	6.12E-06	-3.31E-04
EP – terrestrial	mol N eq.	1.25E-01	5.91E-04	1.24E-04	0.00E+00	1.71E+00	0.00E+00	0.00E+00	5.06E-05	7.88E-04	6.73E-05	-3.42E-03
POCP	kg NMVOC eq.	3.32E-02	1.18E-04	3.67E-05	0.00E+00	3.97E-01	0.00E+00	0.00E+00	1.01E-05	1.26E-04	1.86E-05	-1.15E-03
ADP – minerals & metals*	kg Sb eq.	4.77E-04	5.77E-09	6.02E-10	0.00E+00	4.97E-05	0.00E+00	0.00E+00	4.94E-10	7.41E-09	3.47E-10	-1.63E-04
ADP – fossil*	MJ	1.48E+02	1.11E+00	1.09E-01	0.00E+00	5.07E+03	0.00E+00	0.00E+00	9.49E-02	5.52E-01	4.43E-02	-1.16E+01
WDP*	m ³	1.75E+00	3.48E-04	4.97E-03	0.00E+00	7.03E+01	0.00E+00	0.00E+00	2.98E-05	7.66E-02	3.70E-04	-1.25E-01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential. Accumulated Exceedance; EP-freshwater = Eutrophication potential. fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential. fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential. Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential. deprivation-weighted water consumption											

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Additional mandatory and voluntary impact category indicators

Results per piece of ANDRO low power opal/mp 180 mm												
Indicator	Unit	A1 – A3	A4	A5	B1 – B5	B6	B7	C1	C2	C3	C4	D
GWP – GHG ¹	kg CO ₂ eq.	1.02E+01	8.49E-02	1.21E-02	0.00E+00	2.71E+02	0.00E+00	0.00E+00	7.27E-03	7.42E-01	3.33E-03	-6.99E-01
PM	disease inc.	4.93E-07	1.30E-09	2.24E-10	0.00E+00	6.30E-06	0.00E+00	0.00E+00	1.11E-10	1.93E-09	2.95E-10	-4.47E-08
IRP – HE**	kg U235-eq	4.57E-01	2.02E-04	3.11E-04	0.00E+00	1.20E+02	0.00E+00	0.00E+00	1.73E-05	6.72E-03	5.48E-05	-5.33E-02
ETP – fw*	CTUe	7.69E+01	1.44E+00	1.12E-01	0.00E+00	8.44E+02	0.00E+00	0.00E+00	1.23E-01	1.74E-01	2.47E-02	-4.05E+00
HTP – c*	CTUh	3.40E-09	1.93E-11	1.96E-12	0.00E+00	8.26E-08	0.00E+00	0.00E+00	1.66E-12	1.61E-11	3.78E-12	-2.77E-10
HTP – nc*	CTUh	1.07E-07	1.09E-09	1.16E-10	0.00E+00	1.69E-06	0.00E+00	0.00E+00	9.34E-11	1.06E-09	4.02E-10	-1.89E-08
SQP	dimension-less	6.88E+01	4.92E-01	3.75E-02	0.00E+00	1.91E+03	0.00E+00	0.00E+00	4.21E-02	1.90E-01	9.20E-03	4.24E+01
Acronyms	PM = particulate matter emissions. IRP-HE = ionizing radiation potential-human exposure. ETP-fw = ecotoxicity (freshwater). HTP-c = human toxicity potential. cancer effects. HTP-nc = human toxicity potential. non-cancer effects. SQP = land use related impacts.											

¹ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Results of the environmental performance indicators



Resource use indicators

Results per piece of ANDRO low power opal/mp 180 mm												
Indicator	Unit	A1 – A3	A4	A5	B1 – B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	5.53E+01	8.15E-02	1.49E-02	0.00E+00	3.29E+03	0.00E+00	0.00E+00	6.99E-03	2.60E-01	6.64E-03	4.15E+00
PERM	MJ	2.91E+00	0.00E+00	-2.91E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-1.35E-04	0.00E+00	0.00E+00
PERT	MJ	5.82E+01	8.15E-02	-2.90E+00	0.00E+00	3.29E+03	0.00E+00	0.00E+00	6.99E-03	2.60E-01	6.64E-03	4.15E+00
PENRE	MJ	1.48E+02	1.11E+00	1.09E-01	0.00E+00	5.07E+03	0.00E+00	0.00E+00	9.49E-02	5.52E-01	4.43E-02	-1.16E+01
PENRM	MJ	5.70E+00	0.00E+00	-1.55E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-5.54E+00	0.00E+00	0.00E+00
PENRT	MJ	1.53E+02	1.11E+00	-4.59E-02	0.00E+00	5.07E+03	0.00E+00	0.00E+00	9.49E-02	-4.99E+00	4.43E-02	-1.16E+01
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.34E-02
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m³	5.53E-02	3.93E-05	1.21E-04	0.00E+00	2.76E+00	0.00E+00	0.00E+00	3.37E-06	1.88E-03	1.12E-05	-4.64E-03
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water											

Waste indicators

Results per piece of ANDRO low power opal/mp 180 mm												
Indicator	Unit	A1 – A3	A4	A5	B1 – B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste disposed	kg	7.81E-08	4.01E-11	2.30E-10	0.00E+00	6.38E-06	0.00E+00	0.00E+00	3.44E-12	3.35E-10	2.27E-12	7.64E-09
Non-hazardous waste disposed	kg	3.50E-01	1.46E-04	1.91E-02	0.00E+00	3.79E+00	0.00E+00	0.00E+00	1.25E-05	7.83E-02	2.26E-01	-5.72E-02
Radioactive waste disposed	kg	3.75E-03	1.46E-06	1.97E-06	0.00E+00	7.34E-01	0.00E+00	0.00E+00	1.25E-07	4.57E-05	4.93E-07	-3.35E-04

Output flow indicators

Results per piece of ANDRO low power opal/mp 180 mm												
Indicator	Unit	A1 – A3	A4	A5	B1 – B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	1.01E-01	0.00E+00	2.30E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.04E-02	0.00E+00	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	1.89E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.34E-01	0.00E+00	0.00E+00
Exported energy. electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy. thermal	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Results for additional scenarios for End-of-Life modules

Mandatory impact category indicators according to EN 15804 + A2 (based on EF 3.1)

Results per piece of Results per piece of **ANDRO** low power opal/mp 180 mm

Indicator	Unit	100% Recycling				100% Incineration				100% Landfill			
		C2	C3	C4	D	C2	C3	C4	D	C2	C3	C4	D
GWP – fossil	kg CO ₂ eq.	3.85E-03	4.30E-01	0.00E+00	-1.54E+00	6.26E-03	8.36E-01	0.00E+00	-5.90E-01	3.85E-03	0.00E+00	1.10E-02	-1.51E-01
GWP – biogenic	kg CO ₂ eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GWP – luluc	kg CO ₂ eq.	4.11E-05	3.71E-04	0.00E+00	-2.09E-03	6.68E-05	4.39E-05	0.00E+00	-6.17E-04	4.11E-05	0.00E+00	2.77E-05	-9.13E-06
GWP – total	kg CO₂ eq.	3.89E-03	4.31E-01	0.00E+00	-1.55E+00	6.33E-03	8.37E-01	0.00E+00	-6.59E-01	3.89E-03	0.00E+00	1.10E-02	-1.51E-01
GWP-GHG	kg CO ₂ eq.	3.89E-03	4.31E-01	0.00E+00	-1.55E+00	6.33E-03	8.36E-01	0.00E+00	-5.91E-01	3.89E-03	0.00E+00	1.10E-02	-1.51E-01
ODP	kg CFC 11 eq.	4.70E-16	2.28E-12	0.00E+00	-7.10E-11	7.65E-16	2.36E-13	0.00E+00	-4.78E-12	4.70E-16	0.00E+00	3.47E-14	-6.30E-13
AP	mol H+ eq.	6.24E-06	4.08E-04	0.00E+00	-3.27E-02	1.01E-05	2.16E-04	0.00E+00	-6.80E-04	6.24E-06	0.00E+00	6.92E-05	-1.60E-04
EP – freshwater	kg P eq.	1.08E-08	8.05E-07	0.00E+00	-1.22E-05	1.75E-08	7.09E-08	0.00E+00	-7.24E-07	1.08E-08	0.00E+00	4.56E-06	-3.21E-07
EP – marine	kg N eq.	2.54E-06	1.36E-04	0.00E+00	-1.26E-03	4.14E-06	7.21E-05	0.00E+00	-1.95E-04	2.54E-06	0.00E+00	1.58E-05	-4.53E-05
EP – terrestrial	mol N eq.	2.71E-05	1.60E-03	0.00E+00	-1.35E-02	4.41E-05	1.07E-03	0.00E+00	-2.14E-03	2.71E-05	0.00E+00	1.73E-04	-4.63E-04
POCP	kg NMVOC eq.	5.40E-06	3.48E-04	0.00E+00	-5.50E-03	8.77E-06	1.92E-04	0.00E+00	-6.65E-04	5.40E-06	0.00E+00	4.93E-05	-2.58E-04
ADP – minerals & metals*	kg Sb eq.	2.65E-10	3.02E-08	0.00E+00	-7.51E-04	4.30E-10	5.42E-09	0.00E+00	-6.73E-08	2.65E-10	0.00E+00	8.53E-10	-2.37E-08
ADP – fossil*	MJ	5.08E-02	2.30E+00	0.00E+00	-3.19E+01	8.26E-02	4.33E-01	0.00E+00	-1.16E+01	5.08E-02	0.00E+00	1.73E-01	-3.82E+00
WDP*	m³	1.60E-05	8.22E-02	0.00E+00	-7.89E-01	2.60E-05	9.58E-02	0.00E+00	-5.13E-02	1.60E-05	0.00E+00	1.32E-03	-5.36E-03

Acronyms
GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential. Accumulated Exceedance; EP-freshwater = Eutrophication potential. fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential. fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential. Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential. deprivation-weighted water consumption

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Scaling Factors for other variants

All different versions of ANDRO IQ and their different lighting control distributions (DALI-2, non DIM) have been incorporated into the model and scaled by real factors. The variants and their length versions belong to an environmental homogenous family and fulfil the requirements established by the PEP-PCR-ed4-EN-2021 09 06 by PEP-ECO Passport. The variants use the same material and production technology, but there are differences in the dimension and weight of the components

Scaling factors:

Variant	Control	Optic	Length [mm]	Optical Index	A1-A3	A4	A5	B6	C1-C4	D
ANDRO low power	DALI-2	OPAL/MP	160	IP20	0.92	0.87	0.80	1.00	0.97	0.92
	DALI-2	OPAL/MP	180	IP20	1.00	1.00	1.00	1.00	1.00	1.00
	DALI-2	OPAL/MP	200	IP20	1.08	1.12	1.18	1.00	1.04	1.08
	DALI-2	OPAL/MP	220	IP20	1.15	1.23	1.34	1.00	1.07	1.15
	DALI-2	OPAL/MP	160	IP54	1.01	1.01	0.80	1.00	1.05	1.01
	DALI-2	OPAL/MP	180	IP54	1.06	1.10	1.00	1.00	1.08	1.15
	DALI-2	OPAL/MP	200	IP54	1.24	1.38	1.18	1.00	1.32	1.35
	DALI-2	OPAL/MP	220	IP54	1.32	1.50	1.34	1.00	1.35	1.43
	DALI-2	LENS	160	IP20	0.84	0.84	0.80	1.02	0.91	0.86
	DALI-2	LENS	180	IP20	0.94	0.99	1.00	1.02	0.97	0.96
	DALI-2	LENS	200	IP20	1.00	1.10	1.18	1.02	0.99	1.02
	DALI-2	LENS	220	IP20	1.07	1.21	1.34	1.02	1.03	1.09
	non DIM	OPAL/MP	160	IP20	1.04	0.96	0.73	1.00	1.08	0.90
	non DIM	OPAL/MP	180	IP20	1.09	1.04	0.92	1.00	1.11	0.94
	non DIM	OPAL/MP	200	IP20	1.22	1.22	1.08	1.00	1.24	1.05
	non DIM	OPAL/MP	220	IP20	1.29	1.33	1.23	1.00	1.27	1.12
	non DIM	LENS	160	IP20	0.96	0.93	0.73	1.02	1.05	0.84
	non DIM	LENS	180	IP20	1.03	1.03	0.92	1.02	1.08	0.90
	non DIM	LENS	200	IP20	1.13	1.19	1.08	1.02	1.17	0.99
	non DIM	LENS	220	IP20	1.21	1.32	1.23	1.02	1.23	1.06
ANDRO high power	DALI-2	OPAL/MP	180	IP20	1.22	1.11	1.00	1.37	1.31	1.30
	DALI-2	OPAL/MP	200	IP20	1.48	1.31	1.18	1.37	1.60	1.58
	DALI-2	OPAL/MP	220	IP20	1.57	1.43	1.34	1.37	1.64	1.67
	DALI-2	OPAL/MP	180	IP54	1.28	1.21	1.00	1.37	1.39	1.41
	DALI-2	OPAL/MP	200	IP54	1.68	1.59	1.18	1.37	1.95	1.84
	DALI-2	OPAL/MP	220	IP54	1.77	1.72	1.34	1.37	1.99	1.94
	non DIM	OPAL/MP	180	IP20	1.21	1.10	0.92	1.37	1.30	1.05
	non DIM	OPAL/MP	200	IP20	1.47	1.30	1.08	1.37	1.58	1.28
	non DIM	OPAL/MP	220	IP20	1.55	1.42	1.23	1.37	1.62	1.35

Information related to the sectorial EPD

This EPD is not sectorial.

Version History

Original version of the EPD, 2025-10-22.

Abbreviations

ADPE – Abiotic depletion potential non-fossil resources
ADPF – Abiotic depletion potential fossil resources
AP – Acidification potential, accumulated exceedance
AUT – Austria
CB – Certification Body
CRU – Components for re-use
d/i – direct / indirect
DALI – Digital Addressable Lighting Interface
EEE – Exported electrical energy
EET – Exported thermal energy
EPD – Environmental Product Declaration
EP-freshwater – Eutrophication potential freshwater
EP-marine – Eutrophication potential marine
EP-terrestrial – Eutrophication potential terrestrial
ETP-fw – Eco toxicity freshwater
FW – Net use of fresh water
GLO – Global
GWP-biogenic – Global warming potential biogenic
GWP-fossil – Global warming potential fossil fuels
GWP-GHG – Global warming potential
GWP-luluc – Global warming potential land use and land use change
GWP-total – Global warming potential total
HTTP-c – Human toxicity, cancer effect
HTTP-nc – Human toxicity, non-cancer effects
HWD – Hazardous waste disposed
IRP – Ionizing radiation, human health
LCA – Life Cycle Assessment
MER – Materials for energy recovery
MFR – Materials for recycling
MP – Microprismatic
NHWD – Non-hazardous waste disposed
NRSF – Use of non-renewable secondary fuels
ODP – Depletion potential of the stratospheric ozone layer
PCR – Product Category Rules
PENRE – Use of non renewable primary energy as energy carrier
PENRM – Use of non renewable primary energy resources used as raw materials
PENRT – Total use of non renewable primary energy resource
PERE – Use of renewable primary energy as energy carrier
PERM – Use of renewable primary energy resources used as raw materials
PERT – Total use of renewable primary energy
PM – Particulate matter emissions
PMMA – Polymethylmetacrylate
POCP – Photochemical ozone creation potential
PSR – Product Specific Rules
RE – Renewable Energy
RSF – Use of renewable secondary fuels
RWD – Radioactive waste disposed
SLO – Slovenia
SM – Use of secondary material
SQP – Land use related impacts/Soil quality
UN CPC – United Nations Central Product Classification
WDP – Water (user) deprivation potential

EN 15804:2012+A2:2019 /AC:2021 Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products.

EN 15193:2007 Energy performance of buildings - Energy requirements for lighting

European court of auditors. EU actions and existing challenges on electronic waste. Review No. 4. 2021

General Programme Instructions of the International EPD® System. Version 5.0.1.

ISO 14020:2000 – Environmental labels and declarations – General principles

ISO 14025:2006 - Environmental labels and declarations - Type III environmental declarations - Principles and procedures

ISO 14040:2021 Environmental management – Life cycle assessment – Principles and framework

ISO 14044:2021 Environmental management – Life cycle assessment – Requirements and guidelines

LCA Background Report, ANDRO IQ 2025-10-22

LCA for Experts 10.9.1.17

PCR-ed4-EN-2021 09 062021 P.E.P. Association. Product Category Rules for Electrical. Electronic and HVAC-R Products.

Product category rules (PCR) 2019:14 Construction products version 2.0.1, 2025-06-05. The EPD International, 2025

PSR-0014-ed2.0-EN-2023 07 13. PSR SPECIFIC RULES FOR LUMINAIRES. According to PSRmodele-ed2-EN-2021 11 18.