

SASSO 60 round

ceiling


EN Cylindrical ceiling mounted spotlight made of aluminium; surface light inset lacquered; surface housing powder coated; luminaire housing can be attached to mounting plate without tools by interlock; choice of adjustable symmetric or asymmetric radiation characteristic; variants with symmetric radiation characteristic: precise due to high quality lens system; with different beam angles; variants with asymmetric radiation characteristic: high-quality reflector with micro-faceted, aluminum-vaporised surface; COB (Chip on Board) technology for maximum efficiency (ADJUSTABLE); no multiple shadows; efficient LEDs with very good colour rendering; converter integrated into spotlight head

DE Zylindrischer Deckenanbaustrahler aus Aluminium; Oberfläche Lichteinsatz lackiert; Oberfläche Gehäuse pulverbeschichtet; Leuchtenkörper mittels Verriegelung werkzeuglos auf Montageplatte aufsetzbar; wahlweise einstellbar symmetrische oder asymmetrische Abstrahlcharakteristik; symmetrisch strahlende Varianten: präzise durch hochwertige Linsenoptik; mit verschiedenen Ausstrahlwinkeln; asymmetrische strahlende Varianten: hochwertiger Reflektor mit mikrofacettierter, aluminiumbedampfter Oberfläche; COB (Chip on Board) Technologie für höchste Effizienz (ADJUSTABLE); keine Mehrfachschatten; effiziente LEDs mit sehr guter Farbwiedergabe; Konverter im Strahlerkopf integriert

Quickinfo

2700 K, 3000 K, 3500 K, 4000 K
 CRI ≥ 90 / 2 SDCM, 3 SDCM
 UGR ≤ 10 , UGR ≤ 13 , UGR ≤ 16 ,
 UGR ≤ 19
 up to 105 lm/W
 L80 / 50000 h, L85 / 50000 h,
 L90 / 50000 h
 DALI-2, non DIM
 IP20

Types



Colour



Inner colour



Light distributions



wallwasher and
wallwasher
floor inset



glare control
(UGR ≤ 16)



easy mounting
no visible
screws



Colour Warm
Dimming 1800
– 3000 K
(optional)



CRI ≥ 95 2
SDCM
(optional)



SASSO 60 round adjustable ceiling



SPOT CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | SYSTEM | ORDER CODE |
|--------|--------------|-----------|---------|------------------------|
| 10.4 W | 2700 K | 735 lm | 71 lm/W | 0 4 8 - 3 1 1 0 9 S |
| | 3000 K | 759 lm | 73 lm/W | 0 4 8 - 3 1 1 0 0 S |
| | 3500 K | 775 lm | 75 lm/W | 0 4 8 - 3 1 1 0 2 S |
| | 4000 K | 799 lm | 77 lm/W | 0 4 8 - 3 1 1 0 1 S |

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white.

MEDIUM CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | SYSTEM | ORDER CODE |
|--------|--------------|-----------|---------|------------------------|
| 10.2 W | 2700 K | 874 lm | 86 lm/W | 0 4 8 - 3 1 1 0 9 M |
| | 3000 K | 907 lm | 89 lm/W | 0 4 8 - 3 1 1 0 0 M |
| | 3500 K | 927 lm | 91 lm/W | 0 4 8 - 3 1 1 0 2 M |
| | 4000 K | 946 lm | 93 lm/W | 0 4 8 - 3 1 1 0 1 M |

The data values for the luminous flux may differ for specific order options by -9%. Luminous flux value refers to inner colour traffic white.

FLOOD CRI ≥ 90


| SYSTEM | COLOUR TEMP. | LUM. FLUX | SYSTEM | ORDER CODE |
|--------|--------------|-----------|---------|------------------------|
| 10.2 W | 2700 K | 831 lm | 81 lm/W | 0 4 8 - 3 1 1 0 9 F |
| | 3000 K | 862 lm | 85 lm/W | 0 4 8 - 3 1 1 0 0 F |
| | 3500 K | 880 lm | 86 lm/W | 0 4 8 - 3 1 1 0 2 F |
| | 4000 K | 899 lm | 88 lm/W | 0 4 8 - 3 1 1 0 1 F |

The data values for the luminous flux may differ for specific order options by -14%. Luminous flux value refers to inner colour traffic white.

WIDE FLOOD CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | SYSTEM | ORDER CODE |
|--------|--------------|-----------|---------|------------------------|
| 10.2 W | 2700 K | 876 lm | 86 lm/W | 0 4 8 - 3 1 1 0 9 W |
| | 3000 K | 909 lm | 89 lm/W | 0 4 8 - 3 1 1 0 0 W |
| | 3500 K | 928 lm | 91 lm/W | 0 4 8 - 3 1 1 0 2 W |
| | 4000 K | 948 lm | 93 lm/W | 0 4 8 - 3 1 1 0 1 W |

The data values for the luminous flux may differ for specific order options by -11%. Luminous flux value refers to inner colour traffic white.



SASSO 60 round wallwasher ceiling



WALLWASHER CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | SYSTEM | ORDER CODE |
|--------|--------------|-----------|---------|------------------------|
| 9.5 W | 2700 K | 576 lm | 61 lm/W | 0 4 8 - 3 7 1 0 9 A |
| | 3000 K | 626 lm | 66 lm/W | 0 4 8 - 3 7 1 0 0 A |
| | 3500 K | 626 lm | 66 lm/W | 0 4 8 - 3 7 1 0 2 A |
| | 4000 K | 650 lm | 68 lm/W | 0 4 8 - 3 7 1 0 1 A |

The data values for the luminous flux may differ for specific order options by -8%. Luminous flux value refers to inner colour traffic white, matt silver.

Order options

| CONTROL | | COLOUR | | INNER COLOUR | |
|---------|---|------------------------|---|---------------|---|
| non DIM | 1 | jet black RAL 9005 | 1 | jet black | 1 |
| DALI-2 | 3 | traffic white RAL 9016 | 7 | matt silver | 4 |
| | | | | traffic white | 7 |
| | | | | gold dust | 9 |



SASSO 60 round wallwasher/floor ceiling



WALLWASHER FLOOR CRI ≥ 90

| SYSTEM | COLOUR TEMP. | LUM. FLUX | SYSTEM | ORDER CODE |
|--------|--------------|-----------|----------|------------------------|
| 10.4 W | 2700 K | 1000 lm | 96 lm/W | 0 4 8 - 3 7 1 0 9 W |
| | 3000 K | 1050 lm | 101 lm/W | 0 4 8 - 3 7 1 0 0 W |
| | 3500 K | 1050 lm | 101 lm/W | 0 4 8 - 3 7 1 0 2 W |
| | 4000 K | 1090 lm | 105 lm/W | 0 4 8 - 3 7 1 0 1 W |

Order options

| CONTROL | | COLOUR | | INNER COLOUR | |
|---------|---|------------------------|---|---------------|---|
| non DIM | 1 | jet black RAL 9005 | 1 | jet black | 1 |
| DALI-2 | 3 | traffic white RAL 9016 | 7 | matt silver | 4 |
| | | | | traffic white | 7 |
| | | | | gold dust | 9 |


The Silo, Copenhagen

Denmark

Architect
COBE Architects

Lighting Design
anker & co

Photographer
Kris Dekeijser

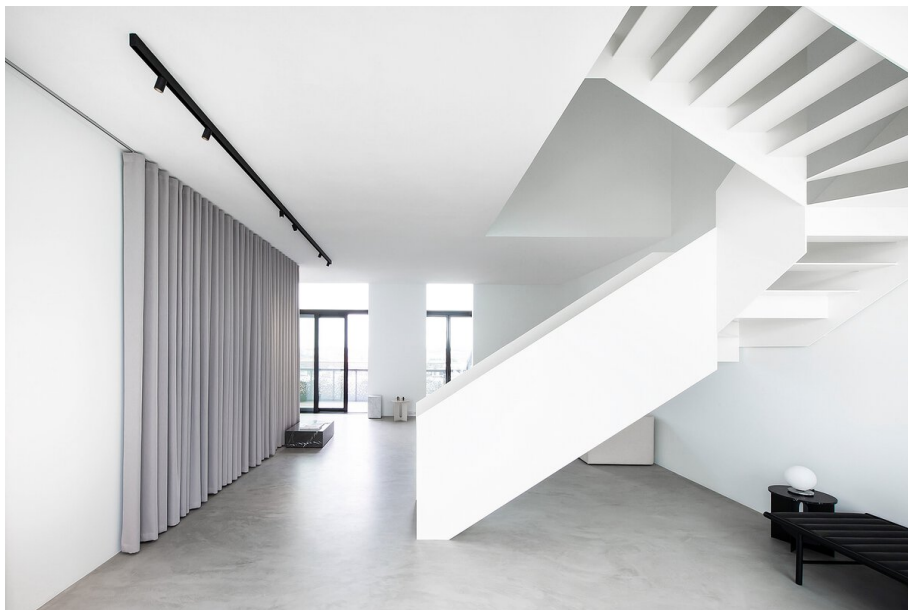

Used products



**SASSO 60 round
ceiling**



**MOVE IT 25 surface /
suspended system**



**SASSO 60 round
recessed 1 lamp**



**JUST 45 MOVE IT
25 / 25 S / 45**







Bank Raiffeisen, Aigle

Switzerland

Architect

ABA PARTENAIRES SA

Photographer

Julie Masson



Used products



SASSO 60 round ceiling



INO circle suspended

