



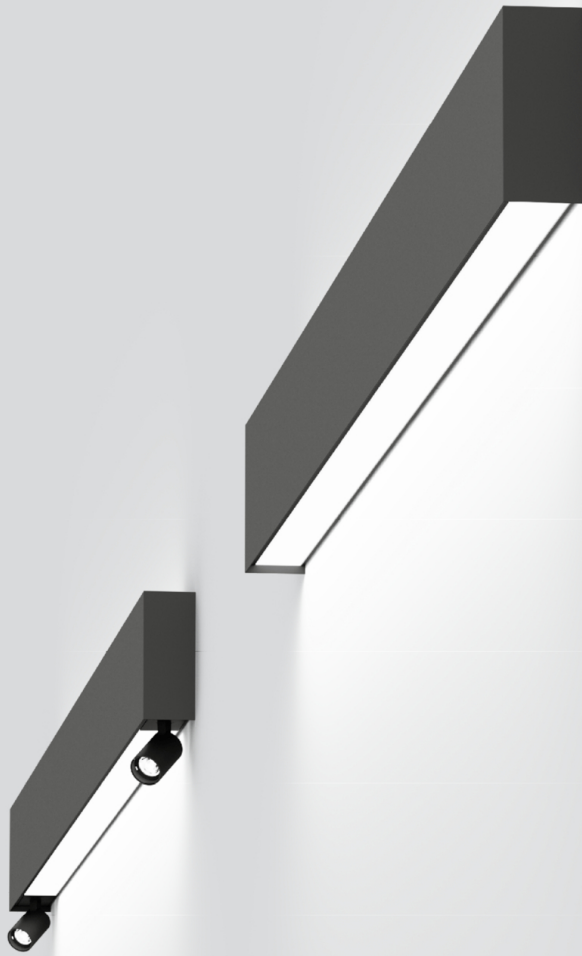

## Quickinfo

3000 K, 4000 K, tunable white  
 2700 K - 5000 K  
 CRI  $\geq$  90, CRI  $\geq$  97 / 3 SDCM  
 up to  $\downarrow$  4,030 lm /  $\uparrow$  4,790 lm  
 up to 3,670 lm/m  
 up to 121 lm/W  
 L80 / 50000 h, L85 / 50000 h,  
 L95 / 50000 h  
 DALI-2, DALI-2 / DIM switch (only  
 spotlights), non DIM, non DIM /  
 ON|OFF switch (only spotlights)  
 High Performance Opal, High  
 Performance Opal / Asymmetric  
 IP20

## Types



## Colour



## Light distributions




# LINEA

<sup>EN</sup> Luminaire housing and front cover from extruded aluminium profile, angular version; no visible screws; surface powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; HPO (High Performance Opal) cover for uniform illumination; or with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); energy-efficient LEDs with very good colour rendering; optionally JUST 26 spotlight module can be installed; optionally with switch for the JUST 26 spotlight modules


<sup>DE</sup> Leuchtenkörper und Frontabdeckung aus Aluminiumstrangpressprofil, kantige Ausführung; keine sichtbaren Schrauben; Oberfläche pulverbeschichtet; geeignet für Wandmontage; homogene Wand- bzw. Deckenaufhellung durch gleichmäßige direkt/indirekte Lichtverteilung; HPO (High Performance Opal) Abdeckung für homogene Ausleuchtung; oder mit speziell berechneter, asymmetrischer Linse für homogene Beleuchtungsstärken (Montage wahlweise zur Boden- oder Deckenaufhellung); energieeffiziente LEDs mit sehr guter Farbwiedergabe; wahlweise JUST 26 Strahlereinsatz einsetzbar; optional mit Schalter für JUST 26 Strahlereinsätze




system solution



CRI  $\geq$  98  
 XPECTRUM  
 (optional)



## LINEA wall



**OPAL / ASYMMETRIC CRI  $\geq 90$**


| SYSTEM | LENGTH  | COLOUR TEMP. | LUM. FLUX      | SYSTEM   | ORDER CODE                                                                                                                                                                                |
|--------|---------|--------------|----------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9.7 W  | 310 mm  | 3000 K       | ↓428/↑509 lm   | 97 lm/W  | 0 5 8 - 6 1 7 1 5   A A |
|        |         | 4000 K       | ↓472/↑562 lm   | 107 lm/W | 0 5 8 - 6 1 7 1 6   A A |
| 17.6 W | 610 mm  | 3000 K       | ↓881/↑1050 lm  | 110 lm/W | 0 5 8 - 6 1 7 2 5   A A |
|        |         | 4000 K       | ↓972/↑1160 lm  | 121 lm/W | 0 5 8 - 6 1 7 2 6   A A |
| 20.9 W | 610 mm  | tunable w.   | ↓1010/↑1200 lm | 106 lm/W | 0 5 8 - 6 1 7 2 D 3  A A                                                                                 |
| 35.0 W | 1210 mm | 3000 K       | ↓1760/↑2090 lm | 110 lm/W | 0 5 8 - 6 1 7 4 5   A A |
|        |         | 4000 K       | ↓1940/↑2310 lm | 121 lm/W | 0 5 8 - 6 1 7 4 6   A A |
| 42.0 W | 1210 mm | tunable w.   | ↓2020/↑2400 lm | 105 lm/W | 0 5 8 - 6 1 7 4 D 3  A A                                                                                 |
| 71.0 W | 2410 mm | 3000 K       | ↓3520/↑4190 lm | 109 lm/W | 0 5 8 - 6 1 7 8 5   A A |
|        |         | 4000 K       | ↓3890/↑4620 lm | 120 lm/W | 0 5 8 - 6 1 7 8 6   A A |
| 83.0 W | 2410 mm | tunable w.   | ↓4030/↑4790 lm | 106 lm/W | 0 5 8 - 6 1 7 8 D 3  A A                                                                                 |

**OPAL / OPAL CRI  $\geq 90$**

| SYSTEM | LENGTH  | COLOUR TEMP. | LUM. FLUX      | SYSTEM   | ORDER CODE                                                                                                                                                                                |
|--------|---------|--------------|----------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9.7 W  | 310 mm  | 3000 K       | ↓428/↑428 lm   | 88 lm/W  | 0 5 8 - 6 1 7 1 5   A H |
|        |         | 4000 K       | ↓472/↑472 lm   | 97 lm/W  | 0 5 8 - 6 1 7 1 6   A H |
| 17.6 W | 610 mm  | 3000 K       | ↓881/↑881 lm   | 100 lm/W | 0 5 8 - 6 1 7 2 5   A H |
|        |         | 4000 K       | ↓972/↑972 lm   | 110 lm/W | 0 5 8 - 6 1 7 2 6   A H |
| 20.9 W | 610 mm  | tunable w.   | ↓1010/↑1010 lm | 97 lm/W  | 0 5 8 - 6 1 7 2 D 3  A H                                                                                 |
| 35.0 W | 1210 mm | 3000 K       | ↓1760/↑1760 lm | 101 lm/W | 0 5 8 - 6 1 7 4 5   A H |
|        |         | 4000 K       | ↓1940/↑1940 lm | 111 lm/W | 0 5 8 - 6 1 7 4 6   A H |
| 42.0 W | 1210 mm | tunable w.   | ↓2020/↑2020 lm | 96 lm/W  | 0 5 8 - 6 1 7 4 D 3  A H                                                                                 |
| 71.0 W | 2410 mm | 3000 K       | ↓3520/↑3520 lm | 99 lm/W  | 0 5 8 - 6 1 7 8 5   A H |
|        |         | 4000 K       | ↓3890/↑3890 lm | 110 lm/W | 0 5 8 - 6 1 7 8 6   A H |
| 83.0 W | 2410 mm | tunable w.   | ↓4030/↑4030 lm | 97 lm/W  | 0 5 8 - 6 1 7 8 D 3  A H                                                                                 |



**LINEA 1** spotlight wall



**OPAL / OPAL | 1 SPOTLIGHT CRI ≥ 90**

| SYSTEM | LENGTH  | COLOUR TEMP. | LUM. FLUX      | SYSTEM   | ORDER CODE                                                                                                                                                                                                                                                                           |
|--------|---------|--------------|----------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 17.6 W | 710 mm  | 3000 K       | ↓873/↑873 lm   | 99 lm/W  | 0 5 8 - 6 1 7 2 5    H |
|        |         | 4000 K       | ↓963/↑963 lm   | 109 lm/W | 0 5 8 - 6 1 7 2 6    H |
| 20.9 W | 710 mm  | tunable w.   | ↓1010/↑1010 lm | 97 lm/W  | 0 5 8 - 6 1 7 2 D    H |
| 35.0 W | 1310 mm | 3000 K       | ↓1760/↑1720 lm | 99 lm/W  | 0 5 8 - 6 1 7 4 5    H |
|        |         | 4000 K       | ↓1940/↑1900 lm | 110 lm/W | 0 5 8 - 6 1 7 4 6    H |
| 42.0 W | 1310 mm | tunable w.   | ↓2020/↑2020 lm | 96 lm/W  | 0 5 8 - 6 1 7 4 D    H |
| 70.0 W | 2510 mm | 3000 K       | ↓3490/↑3490 lm | 100 lm/W | 0 5 8 - 6 1 7 8 5    H |
|        |         | 4000 K       | ↓3850/↑3850 lm | 110 lm/W | 0 5 8 - 6 1 7 8 6    H |
| 83.0 W | 2510 mm | tunable w.   | ↓4030/↑4030 lm | 97 lm/W  | 0 5 8 - 6 1 7 8 D    H |

spotlight 1 x 2,6 W / 159 lm only with 3000 K

### Order options

|                |                                                                                     |                                           |                                                                                     |                                       |                                                                                       |                     |                                                                                       |
|----------------|-------------------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------------------------------|
| <b>CONTROL</b> |  | <b>CONTROL</b>                            |  | <b>CONTROL</b>                        |  | <b>COLOUR</b>       |  |
| non DIM        | 1                                                                                   | non DIM / ON OFF switch (only spotlights) | 2                                                                                   | DALI-2                                | 3                                                                                     | pure white RAL 9010 | 7                                                                                     |
| DALI-2         | 3                                                                                   | DALI-2                                    | 3                                                                                   | DALI-2 / DIM switch (only spotlights) | 4                                                                                     | jet black RAL 9005  | 8                                                                                     |
|                |                                                                                     | DALI-2 / DIM switch (only spotlights)     | 4                                                                                   |                                       |                                                                                       |                     |                                                                                       |
|                |                                                                                     |                                           |                                                                                     |                                       |                                                                                       | <b>MOUNTING</b>     |  |
|                |                                                                                     |                                           |                                                                                     |                                       |                                                                                       | spotlight left      | B                                                                                     |
|                |                                                                                     |                                           |                                                                                     |                                       |                                                                                       | spotlight right     | C                                                                                     |



## LINEA 2 spotlights wall

TUNABLE  
WHITECRI  
≥ 90

220-240 V

DALI  
1ADDR.


X-PERT

X-PERT

### OPAL / OPAL | 2 SPOTLIGHTS CRI ≥ 90

| SYSTEM | LENGTH  | COLOUR TEMP. | LUM. FLUX      | SYSTEM   | ORDER CODE              |
|--------|---------|--------------|----------------|----------|-------------------------|
| 35.0 W | 1410 mm | 3000 K       | ↓1760/↑1720 lm | 99 lm/W  | 0 5 8 - 6 1 7 4 5   D H |
|        |         | 4000 K       | ↓1940/↑1900 lm | 110 lm/W | 0 5 8 - 6 1 7 4 6   D H |
| 42.0 W | 1410 mm | tunable w.   | ↓2020/↑2020 lm | 96 lm/W  | 0 5 8 - 6 1 7 4 D   D H |
| 70.0 W | 2610 mm | 3000 K       | ↓3490/↑3490 lm | 100 lm/W | 0 5 8 - 6 1 7 8 5   D H |
|        |         | 4000 K       | ↓3850/↑3850 lm | 110 lm/W | 0 5 8 - 6 1 7 8 6   D H |
| 83.0 W | 2610 mm | tunable w.   | ↓4030/↑4030 lm | 97 lm/W  | 0 5 8 - 6 1 7 8 D   D H |

spotlights 2 x 2,6 W / 159 lm only with 3000K



### Order options

#### CONTROL

|                                           |   |   |
|-------------------------------------------|---|---|
| non DIM / ON OFF switch (only spotlights) | 1 | 2 |
| DALI-2                                    |   | 3 |
| DALI-2 / DIM switch (only spotlights)     |   | 4 |

#### CONTROL

|                                       |   |   |
|---------------------------------------|---|---|
| DALI-2                                | 2 | 3 |
| DALI-2 / DIM switch (only spotlights) |   | 4 |

#### COLOUR

|                     |   |
|---------------------|---|
| pure white RAL 9010 | 7 |
| jet black RAL 9005  | 8 |

# SNS Headquarters, Moscow

Russia

## Architect

Fedor Raschevsky, Peter  
Kholkovsky

## Lighting Design

Sergey Ananiev

## Photographer

Light&Design



## Used products



**LINEA**



**MINIMAL 100**  
trimless system



**LINEA system**

