

# PABLO focus

180-5211137



Project / Type

Notes

Count / Date



### General

Ceiling | Track

tilt max 310°

rotation 360°

white | RAL 9016 <sup>1</sup>

IP20

754<sup>2</sup>-1280<sup>3</sup> lm

### LED

4000 K

CRI ≥ 95

L90 / 50000 h

initial MacAdam ≤ 2 SDCM

R<sub>g</sub>: 98 | R<sub>f</sub>: 91 | R<sub>(f-15)</sub>: 96

MR 0.85 | MDER 0.77

### Optical

focus | beam angle 17°<sup>2</sup>-47°<sup>3</sup>

PstLM ≤ 1.0<sup>3</sup> 2 4 | SVM ≤ 0.4<sup>3</sup> 2 4

### Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 23.0 W

system 33<sup>2</sup>-56<sup>3</sup> lm/W <sup>5</sup>

### Physical


diameter 70 mm | height 106 mm

0.9 kg

set screw (tool required)


Track light made of die-cast aluminium; surface white powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spotlight housing; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 95; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality plano-convex glass lens; precise object focusing through adjustable lens; adjustable beam angle of 17° - 47°; focusing by means of rubberised adjusting ring on the spotlight head; degree of protection IP20; PC1; 220-240 V; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation by means of set screw; incl. DALI-2 converter; point outlet, either in surface mounted housing or recessed housing, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

### Light distribution

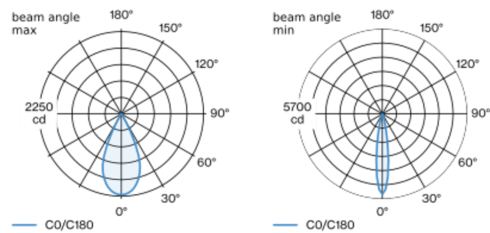

focus 47°			focus 17°		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	2210	0.87	1	5380	0.30
2	550	1.74	2	1350	0.60
3	250	2.60	3	600	0.89
4	140	3.47	4	340	1.19
5	90	4.34	5	220	1.49

### Product drawing



### Installation instructions



### Lighting calculator



[180-5211137] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.97	0.95	0.93	0.91	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup>	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF	Lamp Survival Factor	

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	45
B16	80

Mounting accessories

RECESSED HOUSING

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
point outlet	traffic white	151	186-072277
point outlet	jet black	151	186-072278



SURFACE HOUSING

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
point outlet	traffic white	120	186-072287
point outlet	jet black	120	186-072288



Optical accessories

SNOOT

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
jet black	62	080-5900008



HONEYCOMB LOUVER

COLOUR	Ø (MM)	ARTICLE NUMBER(S)
jet black	61	080-5900018

