

PABLO focus

180-5210138



Project / Type


Notes

Count / Date



Track light made of die-cast aluminium; surface black powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spotlight housing; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 95 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; incl. high quality plano-convex glass lens; precise object focusing through adjustable lens; adjustable beam angle of 17° - 47°; focusing by means of rubberised adjusting ring on the spotlight head; degree of protection IP20; PC1; 220-240 V; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation by means of set screw; incl. DALI-2 converter; point outlet, either in surface mounted housing or recessed housing, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution

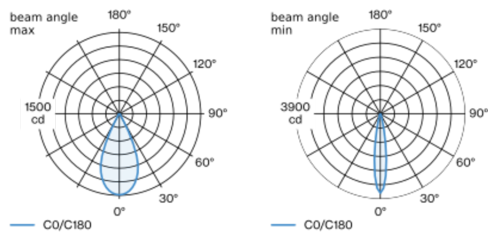

h (m)	E0° (lx)	ø (m)
1	1490	0.87
2	370	1.74
3	170	2.60
4	90	3.47
5	60	4.34

h (m)	E0° (lx)	ø (m)
1	3630	0.30
2	910	0.60
3	400	0.89
4	230	1.19
5	150	1.49

Product drawing



General

Ceiling | Track

tilt max 310°

rotation 360°

black | RAL 9005 ¹

IP20

508²-862³ lm

LED

4000 K

CRI ≥ 95

L90 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 | R_f: 91 | R₍₁₋₁₅₎: 96

MR 0.85 | MDER 0.77

Optical

focus | beam angle 17°²-47°³

PstLM ≤ 1.0 ² ³ 4 | SVM ≤ 0.4 ² ³ 4

Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 14.0 W

system 36²-62³ lm/W ⁵

Physical

diameter 70 mm | height 106 mm

0.9 kg

set screw (tool required)

¹ RAL code ² beam angle min ³ beam angle max
⁴ Value of containing product at full load (undimmed)
⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



[180-5210138] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com