

PABLO multilens

180-5710587 080-5900020



Project / Type _____


Notes _____

Count / Date _____



Track light made of die-cast aluminium; surface traffic white powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spotlight housing; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; precise radiation characteristic with 16°x59° beam (oval filter); degree of protection IP20; PC1; 220-240 V; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation by means of set screw; incl. converter, dimmable with integrated potentiometer; point outlet, either in surface mounted housing or recessed housing, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



Light distribution



oval 16°

h (m)	E0° (lx)	ø (m)
1	2720	0.28
2	680	0.56
3	300	0.84
4	170	1.12
5	110	1.40

Product drawing



General

Ceiling | Track _____

tilt max 310° _____

rotation 360° _____

traffic white | RAL 9016 _____

IP20 _____

996 lm _____

LED

3000 K _____

CRI ≥ 90 _____

L85 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 98 | R_f: 91 | R₍₁₋₁₅₎: 89 _____

MR 0.6 | MDER 0.55 _____

Optical

oval | beam angle 16°x59° _____

PstLM $\leq 1.0^{1,2}$ | SVM $\leq 0.4^{1,2}$ _____

Electrical

DIM POTI _____

PC1 | 220-240 V _____

system 14.7 W _____

system 68 lm/W³ _____

Physical

diameter 70 mm | height 98 mm _____

0.92 kg _____

set screw (tool required) _____

¹ 59x16 degrees oval
² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



PABLO multilens

180-5710587 080-5900020



Project / Type _____

Notes _____

Count / Date _____

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.92	0.89	0.86
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.


Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	31
B13	40
B16	50
B20	62
B25	78
C10	52
C13	67
C16	85
C20	104
C25	130

Components

OVAL FILTER


TYPE	ARTICLE NUMBER(S)
60 x 15°	080-5900020



Mounting accessories

RECESSED HOUSING / POINT OUTLET

TYPE	COLOUR	Ø (MM)	ARTICLE NUMBER(S)
ceiling thickness	traffic white	151	186-072277
ceiling thickness	jet black	151	186-072278



SURFACE HOUSING / POINT OUTLET


COLOUR	Ø (MM)	ARTICLE NUMBER(S)
traffic white	120	186-072287
jet black	120	186-072288



Other accessories


DIFFUSION SHEET FOR SUPERSPOT

TYPE	ARTICLE NUMBER(S)
for a better homogeneous illumination	080-5900030






Colour rendering

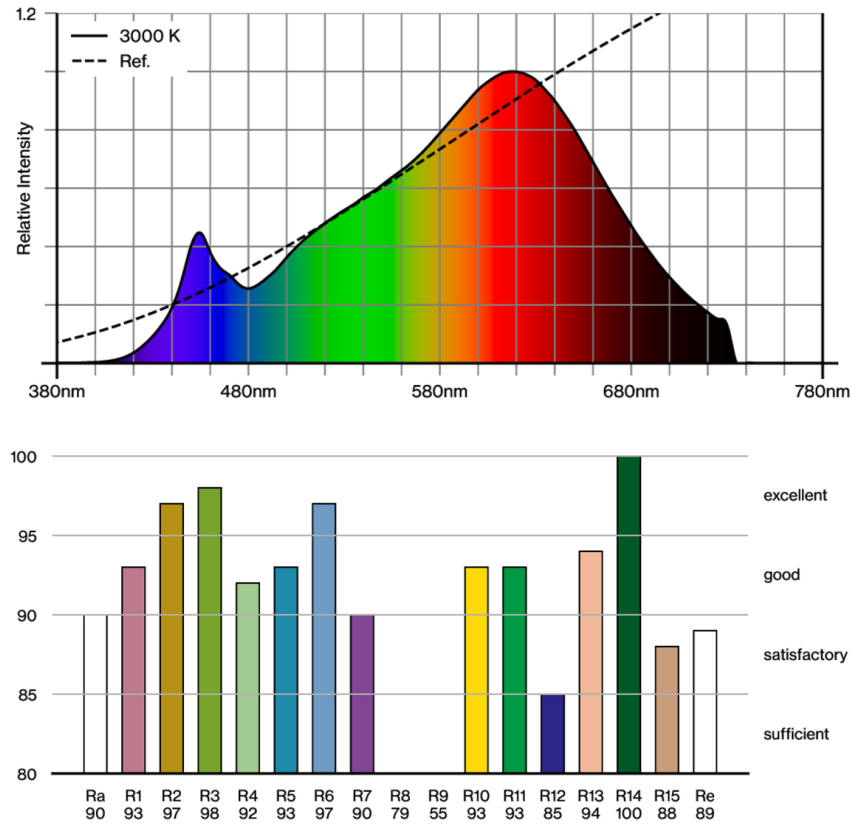

TM30 colour vector graphic



The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.