

PABLO basic

180-5110187W



Project / Type


Notes

Count / Date



Track light made of die-cast aluminium; surface traffic white powder coated; 360° rotatable and 310° tiltable; converter installed in aluminium spotlight housing; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 4000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 95 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 58° beam; installed and exchanged without tools; optical attachments available as accessories; degree of protection IP20; PC1; 220-240 V; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter fixation by means of set screw; incl. converter, dimmable with integrated potentiometer; point outlet, either in surface mounted housing or recessed housing, available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



Light distribution



wide flood 58°

| h (m) | EO° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 1240 | 1.12 |
| 2 | 310 | 2.24 |
| 3 | 140 | 3.35 |
| 4 | 80 | 4.47 |
| 5 | 50 | 5.59 |

Product drawing



General

Ceiling | Track

tilt max 310°

rotation 360°

traffic white | RAL 9016

IP20

988 lm

LED

4000 K

CRI ≥ 95

L90 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 98 | R_f: 91 | R₍₁₋₁₅₎: 96

MR 0.85 | MDER 0.77

Optical

wide flood | beam angle 58°

PstLM ≤ 1.0 ¹ | SVM ≤ 0.4 ¹

Electrical

DIM POTI

PC1 | 220-240 V

system 13.9 W

system 71 lm/W²

Physical

diameter 70 mm | height 98 mm

0.9 kg

set screw (tool required)

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



PABLO basic

180-5110187W



Project / Type _____

Notes _____

Count / Date _____

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF | 0.97 | 0.95 | 0.93 | 0.91 | 0.9 |
| LSF | 1 | 1 | 1 | 1 | 1 |

| | | | | | |
|------------------|------------------------------|--|-------------------|---------------------------------|--|
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Factor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 31 |
| B13 | 40 |
| B16 | 50 |
| B20 | 62 |
| B25 | 78 |
| C10 | 52 |
| C13 | 67 |
| C16 | 85 |
| C20 | 104 |
| C25 | 130 |

Mounting accessories


SURFACE HOUSING / POINT OUTLET

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|---------------|--------|-------------------|
| traffic white | 120 | 186-072287 |
| jet black | 120 | 186-072288 |



RECESSED HOUSING / POINT OUTLET

| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|-------------------|---------------|--------|-------------------|
| ceiling thickness | traffic white | 151 | 186-072277 |
| ceiling thickness | jet black | 151 | 186-072278 |

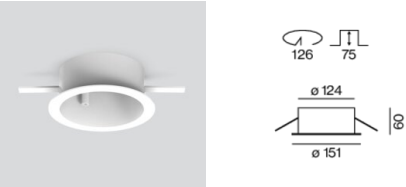

Optical accessories


SNOOT

| COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|-----------|--------|-------------------|
| jet black | 62 | 080-5900008 |



HONEYCOMB LOUVER

| TYPE | COLOUR | Ø (MM) | ARTICLE NUMBER(S) |
|-------------------|-----------|--------|-------------------|
| for BO 70 PABLO | jet black | 61 | 080-5900018 |






Project / Type


Notes

Count / Date

Colour rendering

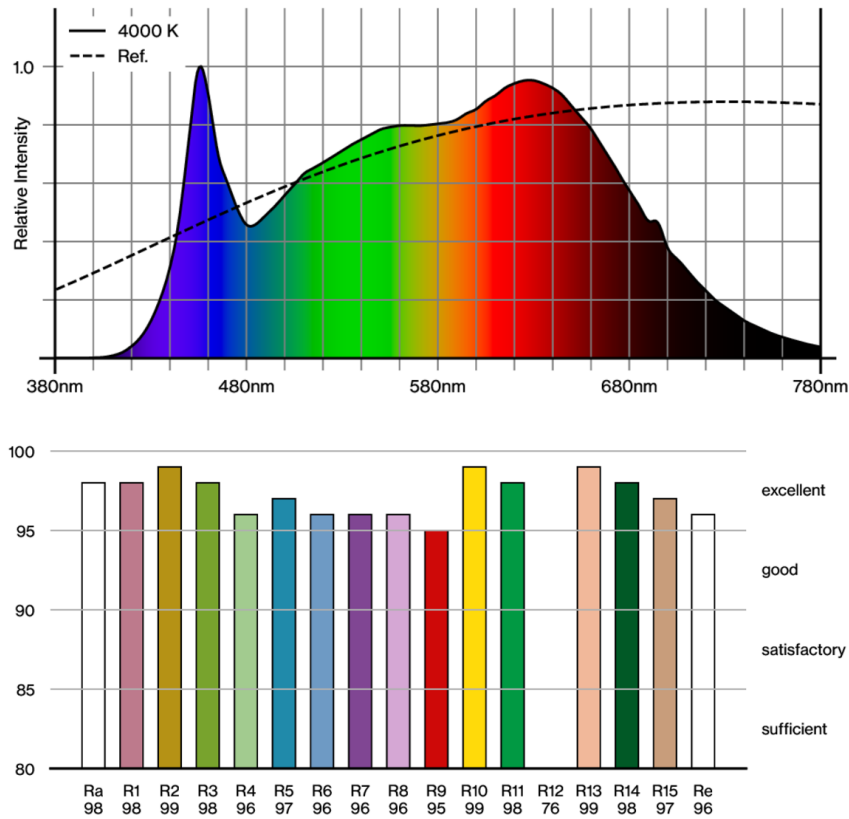

TM30 colour vector graphic



The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.