

L2

MOVE IT 45


090-9L263RB001



Project / Type \_\_\_\_\_


Notes \_\_\_\_\_

Count / Date \_\_\_\_\_

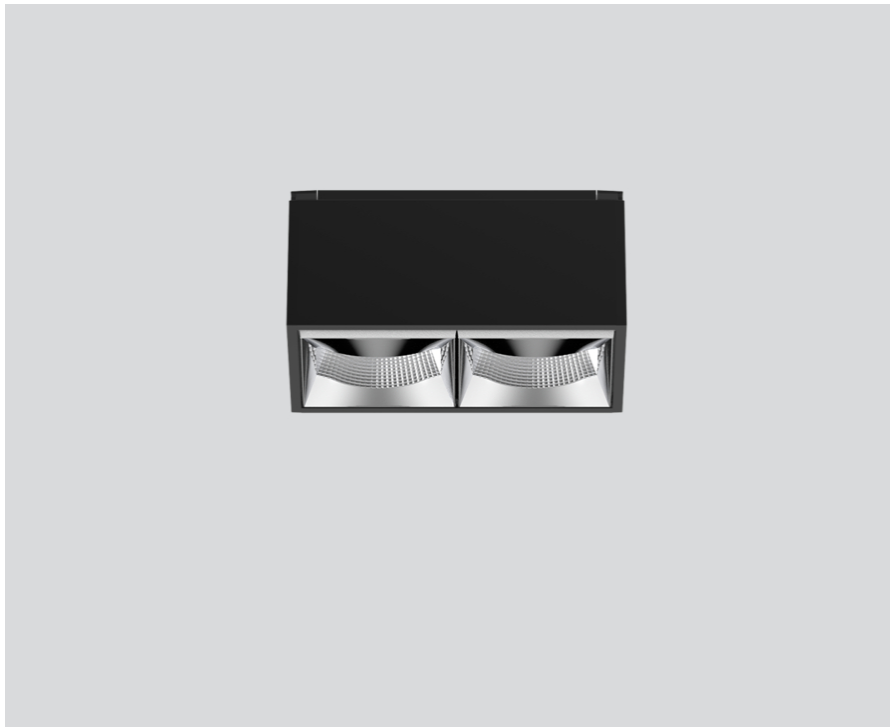

Linear light inset made of aluminium; surface anodised black; light inset can be installed and moved without tools by means of magnetic holders+locking; flush with profile system; power supplied via MOVE IT system track profile; hot plug protection; equipped with two corridor light elements (rectangular medium); symmetrical light distribution with precise radiation characteristic, beam angle 30°x67°; high quality reflector with micro-faceted, aluminum-vaporised surface; Reflector chrome; passive cooling of the LEDs through improved heat sink geometry; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC3; 48 V; DALI single control; flicker-free visual comfort through analogue current control (minimum value 1%); light source not replaceable;

Light distribution



Product drawing



General

Ceiling | Track \_\_\_\_\_

black | RAL 9005 <sup>1</sup> \_\_\_\_\_

Reflector chrome \_\_\_\_\_

IP20 \_\_\_\_\_

663 lm \_\_\_\_\_

optical inset 115 lm/W <sup>2</sup> \_\_\_\_\_

LED

4000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 3 SDCM \_\_\_\_\_

R<sub>g</sub>: 102 | R<sub>f</sub>: 93 | R<sub>f(1-15)</sub>: 92 \_\_\_\_\_

MR 0.81 | MDER 0.74 \_\_\_\_\_

Optical

rectangular | beam angle 30°x67° \_\_\_\_\_

≥65° <3000 cd/m<sup>2</sup> \_\_\_\_\_

PstLM ≤ 1.0 <sup>3</sup> | SVM ≤ 0.4 <sup>3</sup> \_\_\_\_\_

Electrical

DALI-2 | 1 DALI Addr. \_\_\_\_\_

PC3 | 48 V \_\_\_\_\_

fixture 6.8 W \_\_\_\_\_

optical inset 5.8 W \_\_\_\_\_

Physical

length 81 mm | width 43 mm | height 48 mm \_\_\_\_\_

0.2 kg \_\_\_\_\_

<sup>1</sup> RAL code <sup>2</sup> incl. consideration of optical losses  
<sup>3</sup> Value of containing product at full load (undimmed)

Installation instructions



Lighting calculator

