

# UNICO Q4 basic

trim

090-7Q463B0B21 090-7Q4020W



Project / Type	
Notes	
Count / Date	



## General

Ceiling , Recessed	
black reflector , RAL 9016 <sup>1</sup>	
Mounting set traffic white	
IP20	
1270 lm	

## LED

4000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R <sub>g</sub> : 102 , R <sub>f</sub> : 93 , R <sub>f(1-15)</sub> : 92	
MR 0.81	
MDER 0.74	

## Optical

medium round	
beam angle 33°	
UGR ≤ 10 , ≥65° <3000 cd/m <sup>2</sup>	
PstLM ≤ 1.0 <sup>2</sup>	
SVM ≤ 0.4 <sup>2</sup>	

## Electrical

DALI-2	
220-240 V	
system 13.1 W	
system 97 lm/W <sup>3</sup>	
PC2	

## Physical

trim	
length 101 mm	
width 101 mm	
height 51 mm	
0.53 kg	


## Cutout

length 90 mm	
width 90 mm	
min. ceiling thickness 2 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

Square recessed multi-downlight made of die-cast aluminium; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim traffic white; suitable for ceiling thickness of 2-25 mm; equipped with four medium round light elements; symmetrical light distribution with precise radiation characteristic, beam angle 33°; high quality reflector with micro-faceted, aluminum-vaporised surface; black reflector; UGR ≤ 10; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° ≤ 3000 cd/m<sup>2</sup>; passive cooling of the LEDs through improved heat sink geometry; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC2; incl. DALI-2 converter; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional; clank-free;

## Light distribution



## Product drawing

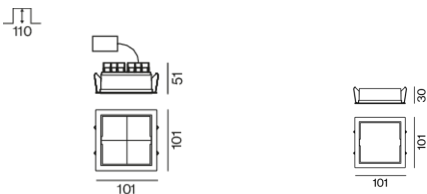

## Installation instructions



## Lighting calculator

