

# UNICO Q4 basic

trim

090-7Q461K0021 090-7Q4020W



Project / Type

Notes

Count / Date



## General

Ceiling , Recessed

chrome reflector , RAL 9016 <sup>1</sup>

Mounting set traffic white

IP20

934 lm

## LED

4000 K

CRI  $\geq$  90

L90 / 50000 h

initial MacAdam  $\leq$  3 SDCM

R<sub>g</sub>: 102 , R<sub>f</sub>: 93 , R<sub>f(1-15)</sub>: 92

MR 0.81

MDER 0.74

## Optical

spot round

beam angle 15°

UGR  $\leq$  10 ,  $\geq 65^\circ$  <1500 cd/m<sup>2</sup>

PstLM  $\leq$  1.0 <sup>2</sup>

SVM  $\leq$  0.4 <sup>2</sup>

## Electrical

non DIM

220-240 V

system 13.1 W

system 71 lm/W<sup>3</sup>

PC2

## Physical

trim

length 101 mm

width 101 mm

height 51 mm

0.53 kg

## Cutout

length 90 mm

width 90 mm

min. ceiling thickness 2 mm

max. ceiling thickness 25 mm

recessed depth 110 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency


## Installation instructions




## Lighting calculator



## Light distribution



## Product drawing

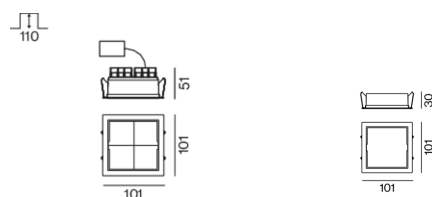

[090-7Q461K0021 090-7Q4020W] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

01.05.2025

1 / 1