


UNICO Q4 basic

trimless

090-7Q461E0B21 090-7Q40100



Project / Type
Notes
Count / Date

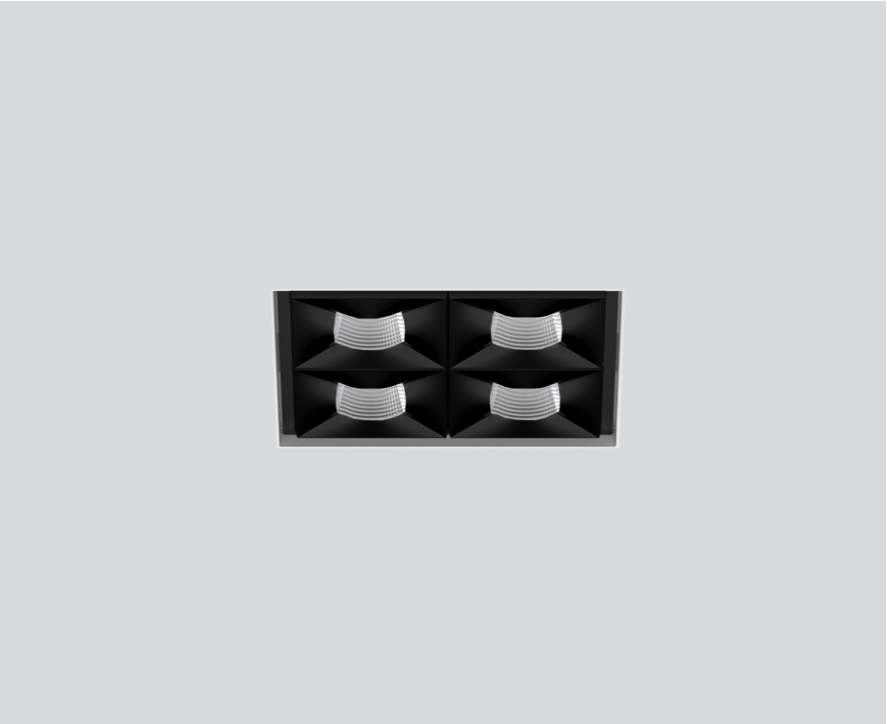

General

Ceiling , Recessed
black reflector
IP20
1250 lm

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 102 , R _f : 93 , R _{f(1-15)} : 92
MR 0.81
MDER 0.74

Optical

medium square
beam angle 32°
UGR ≤ 10 , $\geq 65^\circ$ <3000 cd/m ²
PstLM ≤ 1.0 ¹
SVM ≤ 0.4 ¹

Electrical

non DIM
220-240 V
system 13.1 W
system 95 lm/W ²
PC2

Physical


trimless
length 85 mm
width 85 mm
height 51 mm
0.52 kg

Cutout


length 90 mm
width 90 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses
& operating device efficiency

Light distribution



Product drawing

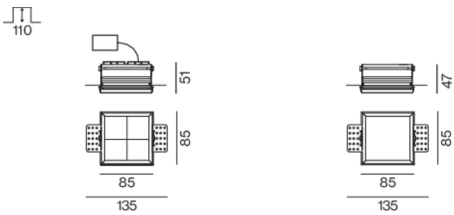

Installation instructions



Lighting calculator

