


# MUSE BAFFLE acoustic

suspended  
091-101111B



Project / Type	
Notes	
Count / Date	

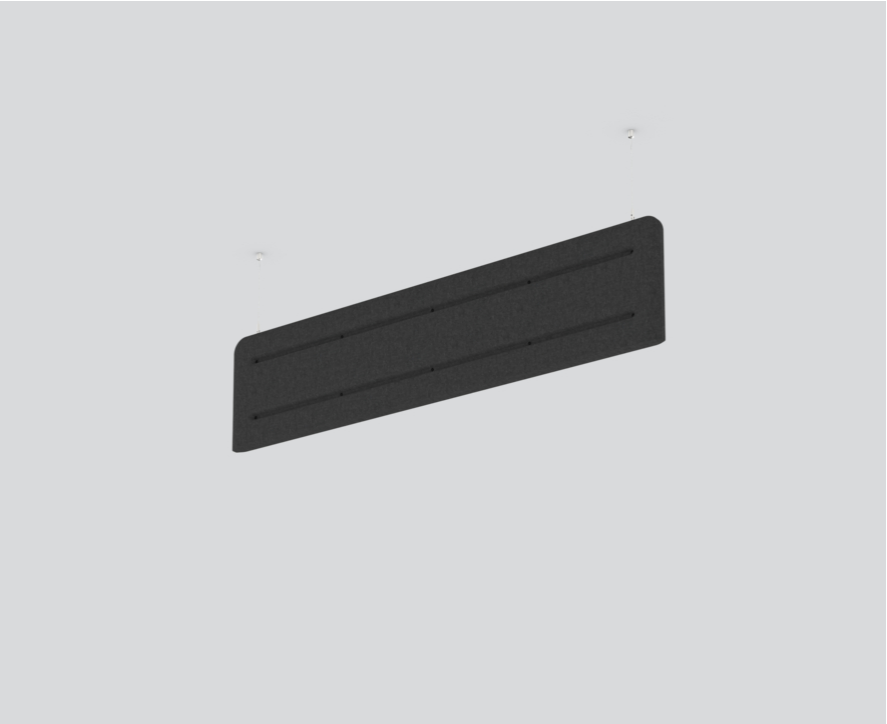

<b>General</b>
Ceiling   Suspended
anthracite

<b>Physical</b>
cable 1500 mm
length 1600 mm   width 46 mm   height 380 mm
2.4 kg

<b>Acoustics</b>
Alpha w ( $\alpha_w$ ) up to 0.45 <sup>1</sup>
SAC (sound absorption class) up to D <sup>1</sup>
NRC up to 0.55 <sup>1</sup>
SAA up to 0.55 <sup>1</sup>


<sup>1</sup> Acoustic data calculations based on MUSE LIGHT, cavity 25cm

## Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, anthracite; colour may deviate; constructed of 2 shells to form cavities that improve acoustic performance; large sound absorbing surface; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

## Product drawing



# MUSE BAFFLE acoustic

suspended

091-101111B



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.1	0.2	0.57	0.93	0.97	0.93

## Sound absorption coefficient ( $\alpha_p$ )

