

UNICO Q9 basic

trim


090-7Q953E0021 090-7Q9020B



Project / Type

Notes

Count / Date

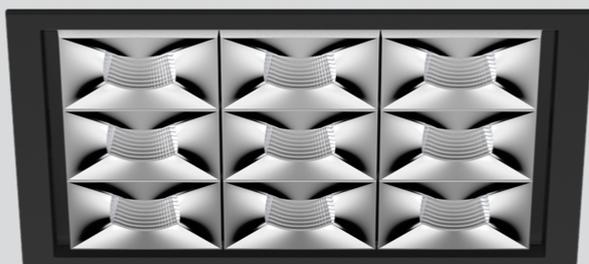

General

Ceiling | Recessed

chrome reflector | RAL 9005 ¹

Mounting set jet black

IP20

2650 lm

LED

3000 K

CRI \geq 90

L90 / 50000 h

initial MacAdam \leq 3 SDCM

R_g: 100 | R_f: 92 | R_{f(-15)}: 91

MR 0.64 | MDER 0.58

Optical

medium square | beam angle 32°

UGR \leq 10 | \geq 65° <3000 cd/m²

PstLM \leq 1.0 ² | SVM \leq 0.4 ²

Electrical

DALI-2

PC2 | 220-240 V

system 29.9 W

system 89 lm/W ³

Physical

trim

length 138 mm | width 138 mm | height 51 mm

0.7 kg

Cutout

length 130 mm | width 130 mm


min. ceiling thickness 2 mm | max. ceiling thickness 25 mm

recessed depth 90 mm

¹ RAL code ² Value of containing product at full load (undimmed)

³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing

