

UNICO L6 basic

trimless

090-7L653E0B21 090-7L60100



Project / Type
Notes
Count / Date



General

Ceiling , Recessed
black reflector
IP20
1660 lm

LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 100 , R _f : 92 , R ₍₁₋₁₅₎ : 91
MR 0.64
MDER 0.58

Optical

medium square
beam angle 32°
UGR ≤ 10 , ≥65° <3000 cd/m ²
PstLM ≤ 1.0 ¹
SVM ≤ 0.4 ¹

Electrical

DALI-2
220-240 V
system 18.6 W
system 89 lm/W ²
PC2


Physical

trimless
length 235 mm
width 47 mm
height 51 mm
0.75 kg


Cutout

length 240 mm
width 50 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Light distribution



Product drawing

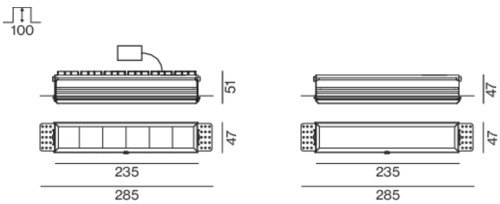

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses
& operating device efficiency

Installation instructions



Lighting calculator

