

# UNICO Q4 basic

trimless

090-7Q443B0021 090-7Q40100



Project / Type	
Notes	
Count / Date	



## General

Ceiling , Recessed	
chrome reflector	
IP20	
1110 lm	

## LED

2700 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R <sub>g</sub> : 101 , R <sub>r</sub> : 91 , R <sub>(1-5)</sub> : 89	
MR 0.56	
MDER 0.51	

## Optical

medium round	
beam angle 33°	
UGR ≤ 10 , ≥65° <3000 cd/m <sup>2</sup>	
PstLM ≤ 1.0 <sup>1</sup>	
SVM ≤ 0.4 <sup>1</sup>	

## Electrical

DALI-2	
220-240 V	
system 13.1 W	
system 85 lm/W <sup>2</sup>	
PC2	


## Physical

trimless	
length 85 mm	
width 85 mm	
height 51 mm	
0.52 kg	


## Cutout

length 90 mm	
width 90 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	

## Light distribution



## Product drawing

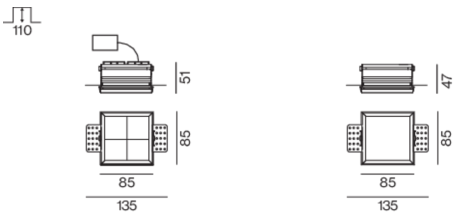

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



## Lighting calculator

