

# UNICO Q1 basic

trimless


090-7Q153R0021 090-7Q10100



Project / Type

Notes

Count / Date

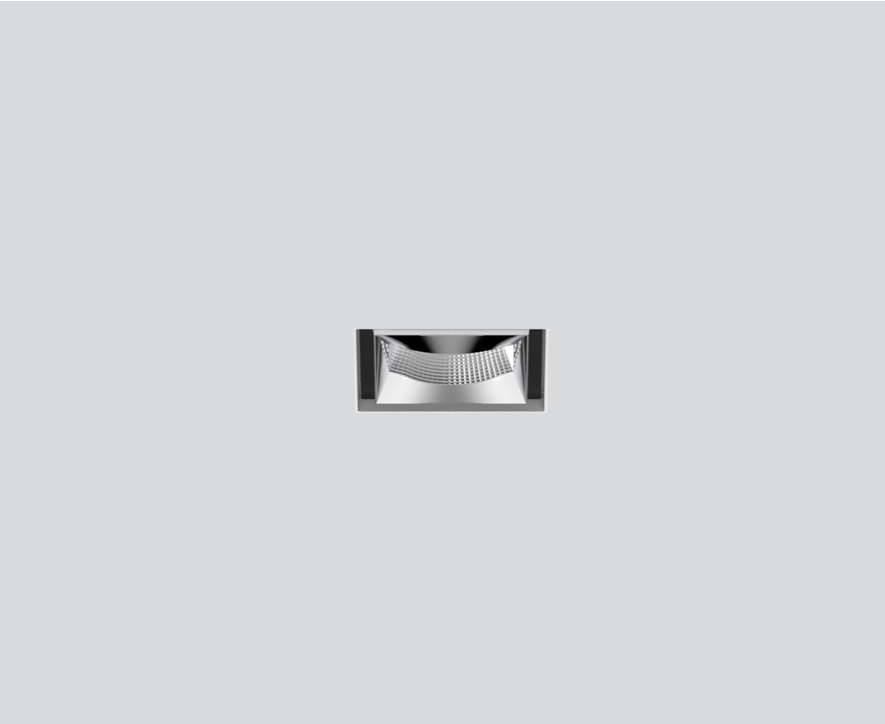

### General

Ceiling | Recessed

chrome reflector

IP20

396 lm

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 | R<sub>f</sub>: 92 | R<sub>(1-15)</sub>: 91

MR 0.64 | MDER 0.58

### Optical

rectangular medium | beam angle 34°x69°

P<sub>stLM</sub> ≤ 1.0 <sup>1</sup> | SVM ≤ 0.4 <sup>1</sup>

### Electrical

DALI-2

PC2 | 220-240 V

system 6.0 W

system 66 lm/W <sup>2</sup>

### Physical

trimless

length 47 mm | width 47 mm | height 51 mm

0.25 kg

### Cutout

length 50 mm | width 50 mm


min. ceiling thickness 12.5 mm | max. ceiling thickness 25 mm

recessed depth 150 mm


<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Light distribution



### Product drawing



### Installation instructions



### Lighting calculator

