

# UNICO L6 basic

trimless


090-7L651B0021 090-7L60100



Project / Type

Notes

Count / Date

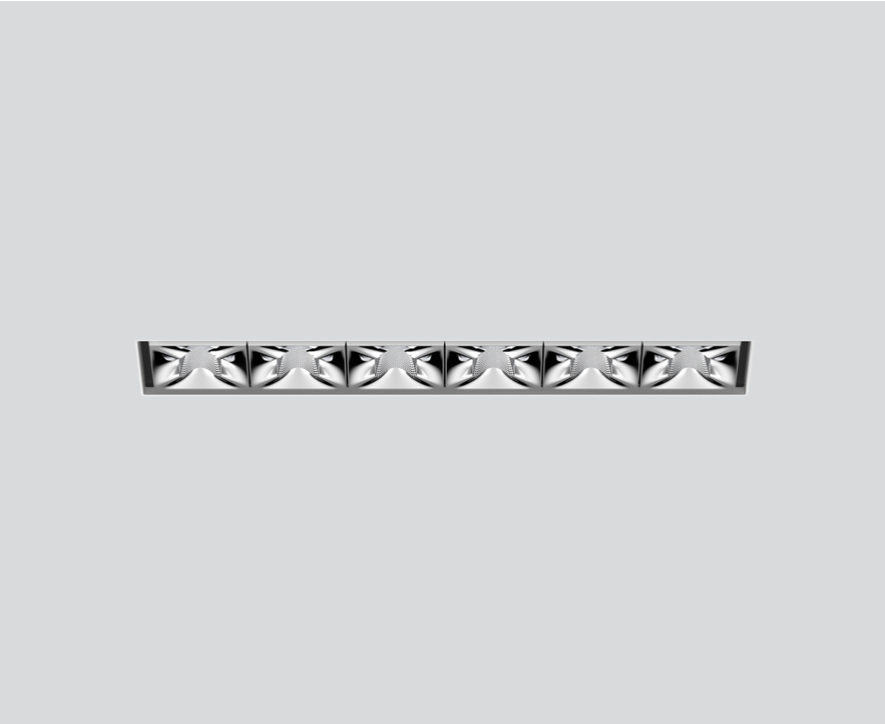

### General

Ceiling , Recessed

chrome reflector

IP20

1690 lm

### LED

3000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100 , R<sub>f</sub>: 92 , R<sub>(1-15)</sub>: 91

MR 0.64

MDER 0.58

### Optical

medium round

beam angle 33°

UGR ≤ 10 , ≥65° <3000 cd/m<sup>2</sup>

PstLM ≤ 1.0 <sup>1</sup>

SVM ≤ 0.4 <sup>1</sup>

### Electrical

non DIM

220-240 V

system 18.6 W

system 91 lm/W<sup>2</sup>

PC2

### Physical

trimless

length 235 mm

width 47 mm

height 51 mm

0.75 kg

### Cutout

length 240 mm

width 50 mm

min. ceiling thickness 12.5 mm


max. ceiling thickness 25 mm

recessed depth 100 mm


<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Light distribution



### Product drawing

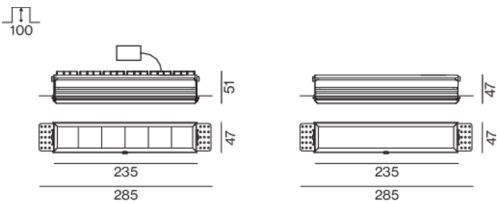

### Installation instructions



### Lighting calculator

