

# UNICO Q1basic

trim

090-7Q163K0021 090-7Q1020B



Project / Type
Notes
Count / Date



## General

Ceiling , Recessed
chrome reflector , RAL 9005 <sup>1</sup>
Mounting set jet black
IP20
299 lm

## LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 102 , R <sub>f</sub> : 93 , R <sub>f(1-15)</sub> : 92
MR 0.81
MDER 0.74

## Optical

spot round
beam angle 15°
UGR ≤ 10 , ≥65° <1500 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

## Electrical

DALI-2
220-240 V
system 6.0 W
system 50 lm/W <sup>3</sup>
PC2

## Physical


trim
length 63 mm
width 63 mm
height 51 mm
0.2 kg

## Cutout


length 50 mm
width 50 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 150 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses  
& operating device efficiency

## Light distribution



## Product drawing

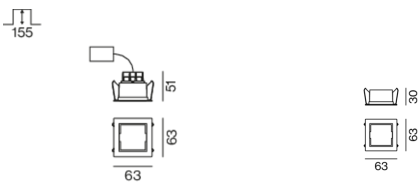

## Installation instructions



## Lighting calculator

