


UNICO Q1basic

trim

090-7Q143G0021 090-7Q1020W



Project / Type	
Notes	
Count / Date	

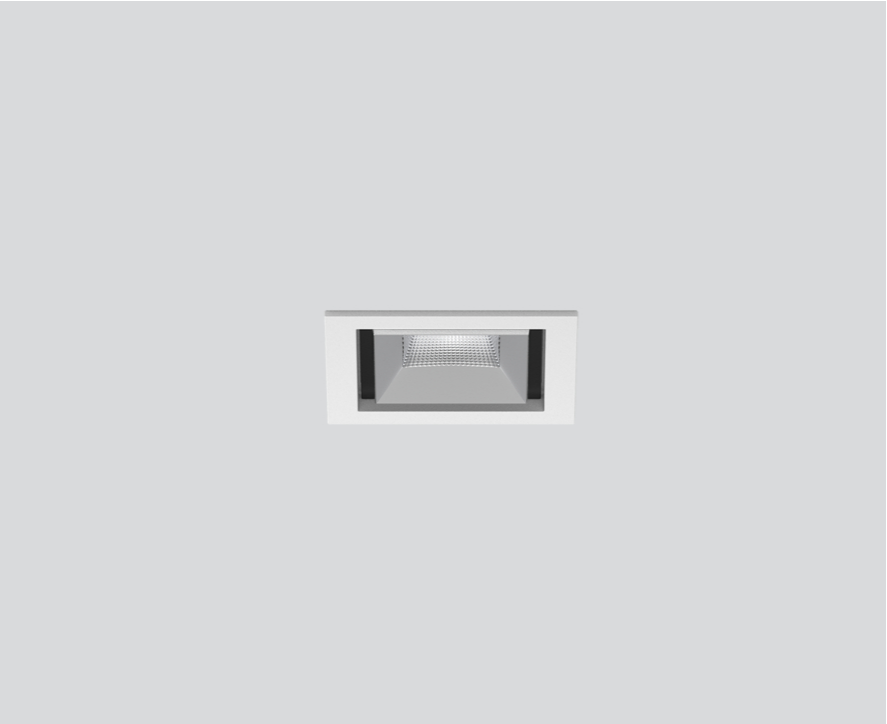

General

Ceiling , Recessed
chrome reflector , RAL 9016 ¹
Mounting set traffic white
IP20
432 lm

LED

2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 101 , R _f : 91 , R _{f(1-15)} : 89
MR 0.56
MDER 0.51

Optical

wide flood square
beam angle 71°
≥65° <3000 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
220-240 V
system 6.0 W
system 72 lm/W ³
PC2

Physical


trim
length 63 mm
width 63 mm
height 51 mm
0.2 kg

Cutout


length 50 mm
width 50 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 150 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses
& operating device efficiency

Light distribution



Product drawing

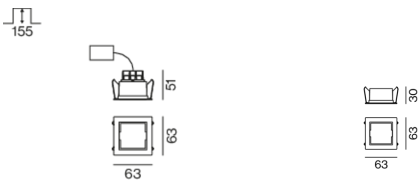

Installation instructions



Lighting calculator

