

# UNICO L6 basic

trimless

090-7L641B0B21 090-7L60100



Project / Type
Notes
Count / Date



## General

Ceiling , Recessed
black reflector
IP20
1590 lm

## LED

2700 K
CRI $\geq$ 90
L90 / 50000 h
initial MacAdam $\leq$ 3 SDCM
R <sub>g</sub> : 101 , R <sub>r</sub> : 91 , R <sub>(1-15)</sub> : 89
MR 0.56
MDER 0.51

## Optical

medium round
beam angle 33°
UGR $\leq$ 10 , $\geq$ 65° <3000 cd/m <sup>2</sup>
PstLM $\leq$ 1.0 <sup>1</sup>
SVM $\leq$ 0.4 <sup>1</sup>

## Electrical

non DIM
220-240 V
system 18.6 W
system 85 lm/W <sup>2</sup>
PC2


## Physical

trimless
length 235 mm
width 47 mm
height 51 mm
0.75 kg


## Cutout

length 240 mm
width 50 mm
min. ceiling thickness 12.5 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

## Light distribution



## Product drawing

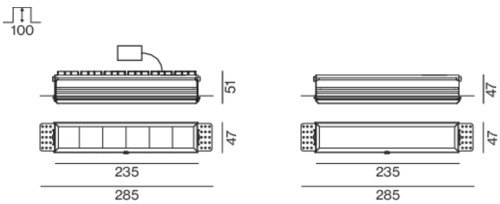

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



## Lighting calculator

