

UNICO L4basic

trim

090-7L443F0B21 090-7L4020W



Project / Type
Notes
Count / Date



General

Ceiling , Recessed
black reflector , RAL 9016 ¹
Mounting set traffic white
IP20
1300 lm

LED

2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 101 , R _f : 91 , R _{t(1-15)} : 89
MR 0.56
MDER 0.51

Optical

flood square
beam angle 56°
UGR ≤ 19 , ≥65° <3000 cd/m ²
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
220-240 V
system 13.1 W
system 99 lm/W ³
PC2


Physical

trim
length 176 mm
width 63 mm
height 51 mm
0.55 kg


Cutout

length 165 mm
width 50 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 100 mm

Light distribution



Product drawing

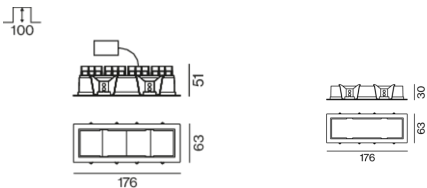

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses
& operating device efficiency

Installation instructions



Lighting calculator

