

UNICO L4basic

trimless

090-7L443F0B21 090-7L40100



Project / Type	
Notes	
Count / Date	



General

Ceiling , Recessed	
black reflector	
IP20	
1300 lm	

LED

2700 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 101 , R _r : 91 , R ₍₁₋₅₎ : 89	
MR 0.56	
MDER 0.51	

Optical

flood square	
beam angle 56°	
UGR ≤ 19 , ≥65° <3000 cd/m ²	
PstLM ≤ 1.0 ¹	
SVM ≤ 0.4 ¹	

Electrical

DALI-2	
220-240 V	
system 13.1 W	
system 99 lm/W ²	
PC2	


Physical

trimless	
length 160 mm	
width 47 mm	
height 51 mm	
0.54 kg	


Cutout

length 165 mm	
width 50 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 100 mm	

Light distribution



Product drawing

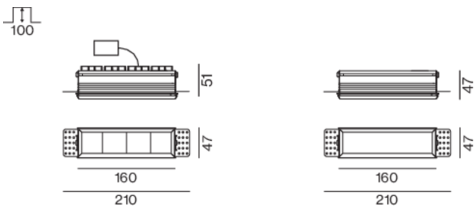

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

