

# UNICO L3 basic

trim

090-7L353B0B21 090-7L3020B



Project / Type	
Notes	
Count / Date	



### General

Ceiling , Recessed
black reflector , RAL 9005 <sup>1</sup>
Mounting set jet black
IP20
847 lm

### LED

3000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 100 , R <sub>f</sub> : 92 , R <sub>f(1-15)</sub> : 91
MR 0.64
MDER 0.58

### Optical

medium round
beam angle 33°
UGR ≤ 10 , ≥65° <3000 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

### Electrical

DALI-2
220-240 V
system 9.8 W
system 86 lm/W <sup>3</sup>
PC2


### Physical

trim
length 138 mm
width 63 mm
height 51 mm
0.38 kg


### Cutout

length 130 mm
width 50 mm
min. ceiling thickness 2 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

### Light distribution



### Product drawing

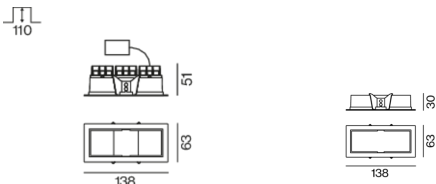

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions



### Lighting calculator

