

# UNICO L4basic

trimless

090-7L453F0021 090-7L40100



Project / Type	
Notes	
Count / Date	



### General

Ceiling , Recessed	
chrome reflector	
IP20	
1380 lm	

### LED

3000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R <sub>g</sub> : 100 , R <sub>f</sub> : 92 , R <sub>(1-15)</sub> : 91	
MR 0.64	
MDER 0.58	

### Optical

flood square	
beam angle 56°	
UGR ≤ 19 , ≥65° <3000 cd/m <sup>2</sup>	
PstLM ≤ 1.0 <sup>1</sup>	
SVM ≤ 0.4 <sup>1</sup>	

### Electrical

DALI-2	
220-240 V	
system 13.1 W	
system 105 lm/W <sup>2</sup>	
PC2	

### Physical


trimless	
length 160 mm	
width 47 mm	
height 51 mm	
0.54 kg	

### Cutout


length 165 mm	
width 50 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 100 mm	

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Light distribution



### Product drawing

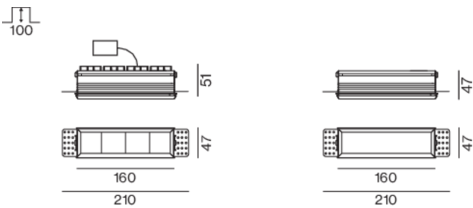

### Installation instructions



### Lighting calculator

