


UNICO L3basic

trimless

090-7L341E0021 090-7L30100



Project / Type	
Notes	
Count / Date	

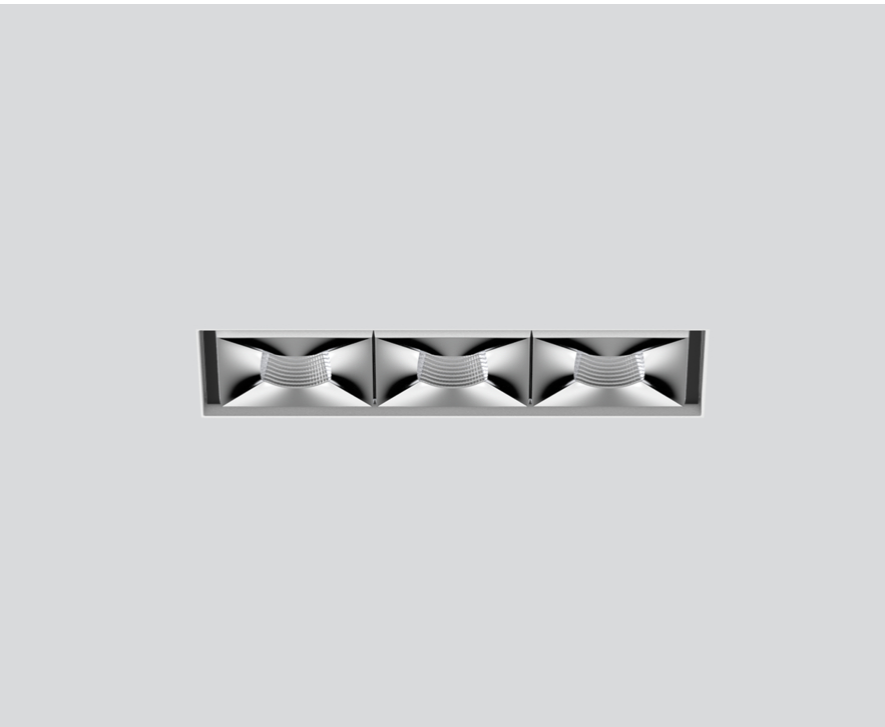

General

Ceiling , Recessed	
chrome reflector	
IP20	
781 lm	

LED

2700 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 101 , R _f : 91 , R _{f(1-5)} : 89	
MR 0.56	
MDER 0.51	

Optical

medium square	
beam angle 32°	
UGR ≤ 10 , ≥65° <3000 cd/m ²	
PstLM ≤ 1.0 ¹	
SVM ≤ 0.4 ¹	

Electrical

non DIM	
220-240 V	
system 9.8 W	
system 80 lm/W ²	
PC2	

Physical


trimless	
length 122 mm	
width 47 mm	
height 51 mm	
0.37 kg	

Cutout


length 130 mm	
width 50 mm	
min. ceiling thickness 12.5 mm	
max. ceiling thickness 25 mm	
recessed depth 110 mm	

¹ Value of containing product at full load (undimmed)
² incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution



Product drawing

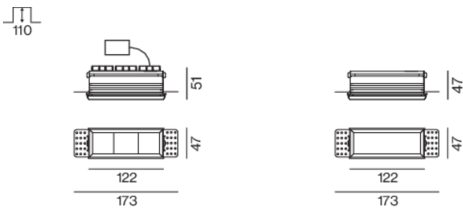

Installation instructions



Lighting calculator

