

# UNICO L2 basic

trim


090-7L241R0021 090-7L2020B



Project / Type

Notes

Count / Date

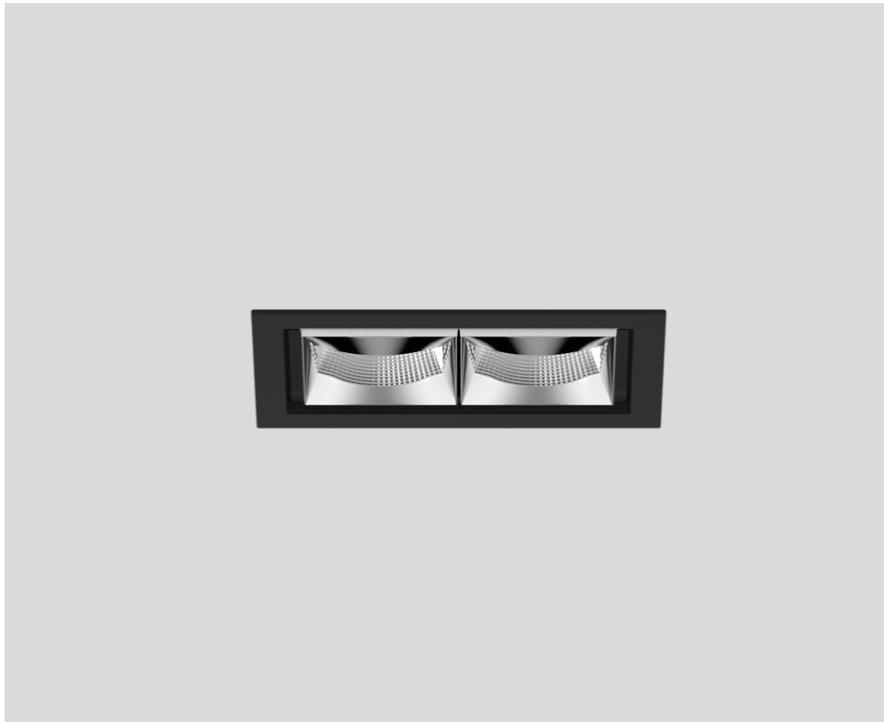

## General

Ceiling , Recessed  
chrome reflector , RAL 9005 <sup>1</sup>  
Mounting set jet black  
IP20  
562 lm

## LED

2700 K  
CRI ≥ 90  
L90 / 50000 h  
initial MacAdam ≤ 3 SDCM  
R<sub>g</sub>: 101 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 89  
MR 0.56  
MDER 0.51

## Optical

rectangular medium  
beam angle 34°x69°  
≥65° <3000 cd/m<sup>2</sup>  
PstLM ≤ 1.0 <sup>2</sup>  
SVM ≤ 0.4 <sup>2</sup>

## Electrical

non DIM  
220-240 V  
system 7.3 W  
system 77 lm/W<sup>3</sup>  
PC2

## Physical


trim  
length 101 mm  
width 63 mm  
height 51 mm  
0.35 kg

## Cutout


length 90 mm  
width 50 mm  
min. ceiling thickness 2 mm  
max. ceiling thickness 25 mm  
recessed depth 120 mm

Rectangular recessed multi-downlight made of die-cast aluminium; installation without tools in mounting set due to patented ball catch system; rectangular installation housing; with trim jet black; suitable for ceiling thickness of 2-25 mm; equipped with two corridor light elements (rectangular medium); symmetrical light distribution with precise radiation characteristic, beam angle 34°x69°; high quality reflector with micro-faceted, aluminum-vaporised surface; chrome reflector; passive cooling of the LEDs through improved heat sink geometry; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 90% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; through wiring connection box, 3-pole or 5-pole, available as an accessory; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional; clank-free;

## Light distribution



## Product drawing

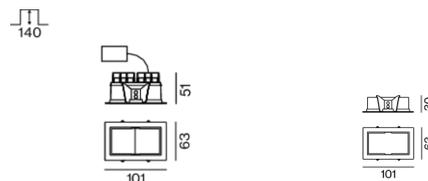

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



## Lighting calculator



[090-7L241R0021 090-7L2020B] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

02.05.2025

1 / 1