

# UNICO wall 2 lamps

trim


090-6L251UB001 090-7Q4020W



Project / Type


Notes

Count / Date

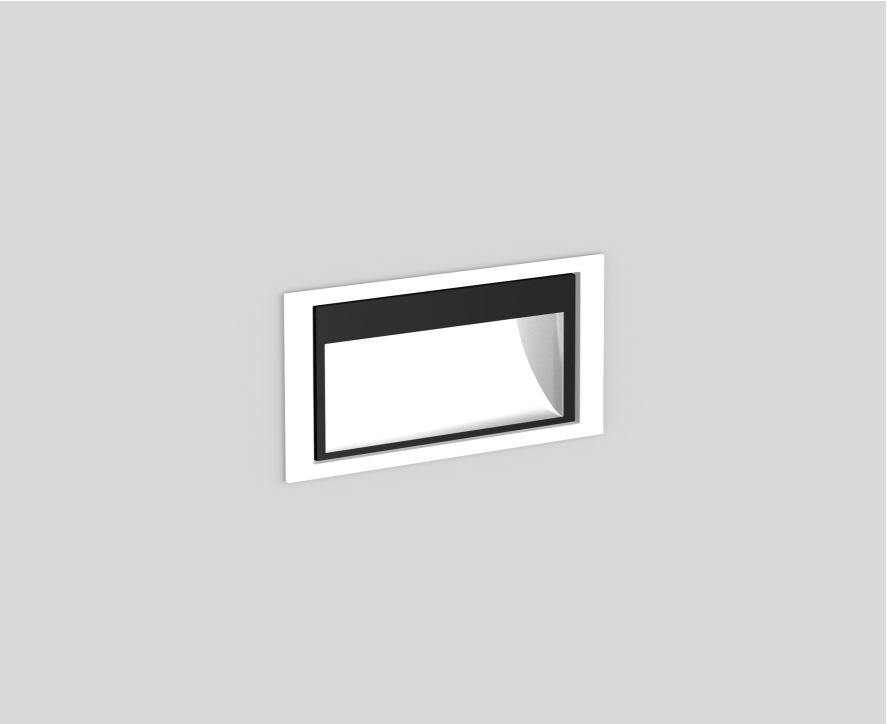

Square wall recessed luminaire made from aluminium; surface black; installation without tools in mounting set due to patented ball catch system; square installation housing; with trim traffic white; suitable for wall thickness of 2-25 mm; incl. external converter; high quality reflector with micro-faceted, aluminum-vaporised surface; asymmetrical light distribution with precise radiation characteristic; installation optionally for floor or ceiling illumination; passive cooling of the LEDs through improved heat sink geometry; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 80% of luminous flux after 50000 operating hours; energy-efficient high power LEDs with very good colour rendering; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; light source not replaceable; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Wall | Recessed

black | RAL 9005 <sup>1</sup>

traffic white

IP20

995 lm

## LED

3000 K

CRI  $\geq 90$

L80 / 50000 h

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 100 | R<sub>f</sub>: 92 | R<sub>f(1-15)</sub>: 91

MR 0.64 | MDER 0.58

## Optical

asymmetric | beam angle 148°

PstLM  $\leq 1.0$  <sup>2</sup> | SVM  $\leq 0.4$  <sup>2</sup>

## Electrical

non DIM

PC2 | 220-240 V

system 17.3 W

system 58 lm/W <sup>3</sup>

## Physical

trim

length 80 mm | width 53 mm | height 80 mm

0.56 kg

## Cutout

length 90 mm | width 90 mm

recessed depth 110 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



# UNICO wall 2 lamps

trim

090-6L251UB001 090-7Q4020W



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000                       | 20 000 | 30 000            | 40 000                          | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF               | 0.94                         | 0.91   | 0.89              | 0.87                            | 0.84   |
| LSF                | 1                            | 1      | 1                 | 1                               | 1      |
| MF                 | LMF × RSMF × LLMF × LSF      |        | RSMF <sup>a</sup> | Room Surface Maintenance Factor |        |
| MF                 | Maintenance Factor           |        | LLMF              | Lamp Lumens Maintenance Factor  |        |
| LMF <sup>a</sup>   | Luminaire Maintenance Factor |        | LSF               | Lamp Survival Factor            |        |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 48                 |
| B13                            | 62                 |
| B16                            | 76                 |
| B20                            | 95                 |
| C10                            | 81                 |
| C13                            | 104                |
| C16                            | 129                |
| C20                            | 162                |

## Components

### MOUNTING SET with trim

| TYPE                      | COLOUR        | L-W-H (MM) | ARTICLE NUMBER(S) |
|---------------------------|---------------|------------|-------------------|
| for intermediate ceilings | traffic white | 101-101-30 | 090-7Q4020W       |



## Mounting accessories

### PRIMED CONCRETE MOUNTING HOUSING

| L-W-H (MM)  | ARTICLE NUMBER(S) |
|-------------|-------------------|
| 240-400-130 | 052-1914320       |

