


# UNICO Q4basic

ceiling

090-1Q453FGB01



Project / Type	
Notes	
Count / Date	

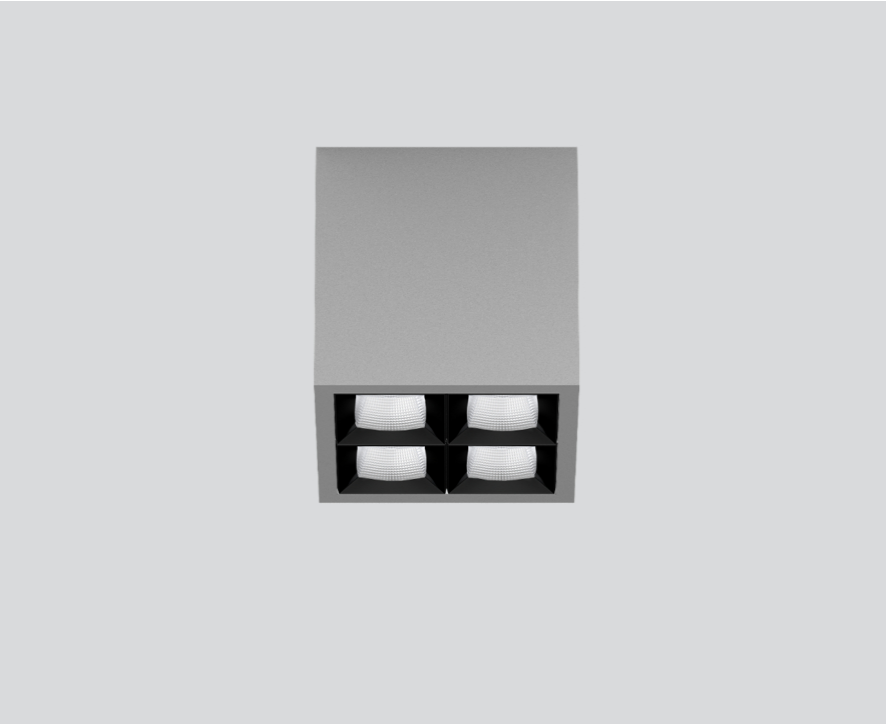

## General

Ceiling , Surface	
grey , RAL 9006 <sup>1</sup>	
Reflector black	
IP20	
1870 lm	

## LED

3000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R <sub>g</sub> : 100 , R <sub>f</sub> : 92 , R <sub>f(1-5)</sub> : 91	
MR 0.64	
MDER 0.58	

## Optical

flood square	
beam angle 56°	
UGR ≤ 19 , ≥65° <3000 cd/m <sup>2</sup>	
PstLM ≤ 1.0 <sup>2</sup>	
SVM ≤ 0.4 <sup>2</sup>	

## Electrical


DALI-2	
220-240 V	
system 19.3 W	
system 97 lm/W <sup>3</sup>	
PC1	

## Physical


length 88 mm	
width 88 mm	
height 90 mm	
0.5 kg	

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Light distribution



## Product drawing



## Installation instructions



## Lighting calculator

