

# UNICO Q1basic

ceiling


090-1Q161BWB01



Project / Type

Notes

Count / Date

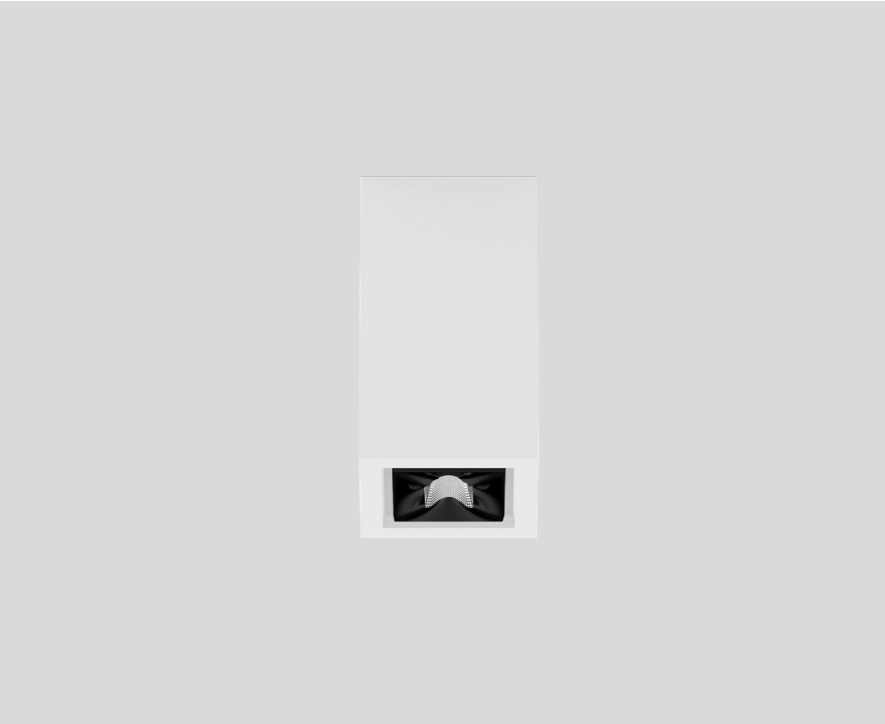

General

Ceiling , Surface

white , RAL 9016 <sup>1</sup>

Reflector black

IP20

426 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 102 , R<sub>f</sub>: 93 , R<sub>f(1-5)</sub>: 92

MR 0.81

MDER 0.74

Optical

medium round

beam angle 33°

UGR ≤ 10

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

Electrical

non DIM

220-240 V

system 5.7 W

system 75 lm/W<sup>3</sup>

PC1

Physical


length 51 mm

width 51 mm


height 90 mm

0.2 kg

Light distribution



Product drawing



<sup>1</sup> RAL code

<sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator

