


# UNICO L3basic

ceiling

090-1L343CBB01



Project / Type	
Notes	
Count / Date	

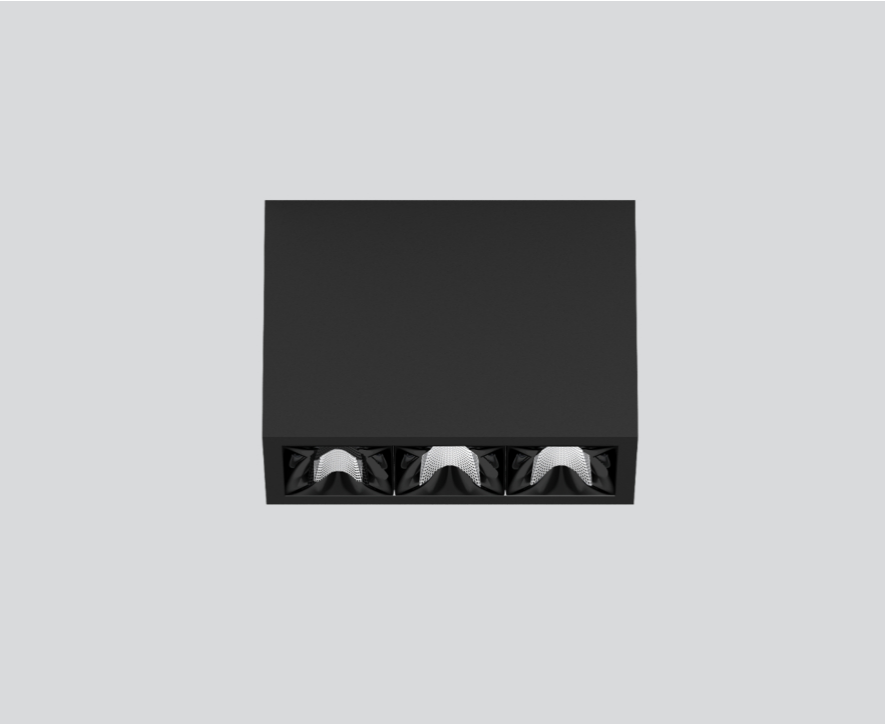

### General

Ceiling , Surface
black , RAL 9005 <sup>1</sup>
Reflector black
IP20
1550 lm

### LED

2700 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R <sub>g</sub> : 101 , R <sub>f</sub> : 91 , R <sub>t(1-15)</sub> : 89
MR 0.56
MDER 0.51

### Optical

flood round
beam angle 49°
UGR ≤ 19
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>


### Electrical

DALI-2
220-240 V
system 17.9 W
system 87 lm/W <sup>3</sup>
PC1


### Physical

length 126 mm
width 51 mm
height 90 mm
0.45 kg

### Light distribution



### Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

### Installation instructions



### Lighting calculator

