

DOC 180

wall


088-271051D



Project / Type

Notes

Count / Date

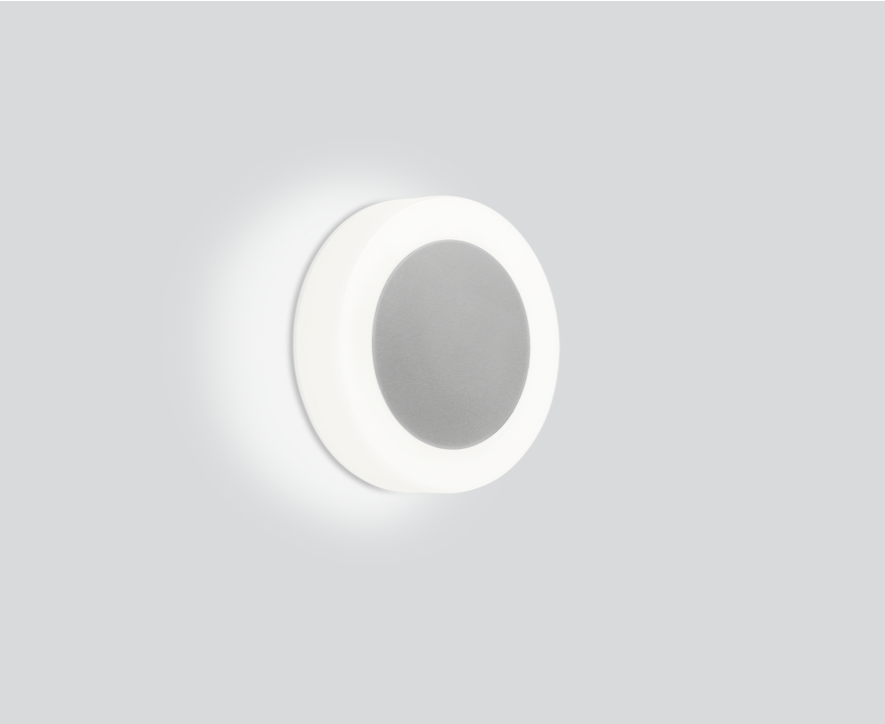

General

Ceiling / Wall | Surface

dark grey | RAL 9007 ¹

IP54

IK09

1340 lm

LED

3000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

MR 0.54 | MDER 0.49

Optical

opal (lambertsch)

Electrical

non DIM

PC1 | 220-240 V

system 13.5 W

system 99 lm/W ²


Physical

diameter 180 mm | height 40 mm


0.9 kg

Round light fitting in die-cast aluminium; central decorative disc made of galvanized sheet steel attached by magnet; surface dark grey powder coated; suitable for wall or ceiling mounting; opal cover for completely homogeneous illumination; with increased transmission and diffusion; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP54; with pressure equalisation valve; PC1; 220-240 V; shock resistance IK09; ambient temperatures from -20°C to + 50°C; suitable for through wiring; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions

