

VARO 110

track
080-6120517S



Project / Type


Notes

Count / Date




Track light made of die-cast aluminium; surface traffic white powder coated; 355° rotatable and 90° tiltable; converter integrated into spotlight head; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 14° beam; installed and exchanged without tools; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC1; 220-240 V; incl. converter, non dimmable; adapter for toolless insertion or movement on a variety of 3-phase power tracks; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



spot 14° 1050 mA		
h (m)	EO° (lx)	ø (m)
1	26400	0.25
2	6600	0.50
3	2900	0.75
4	1700	1.00
5	1100	1.25

Product drawing



General

Ceiling | Track

tilt max 90°

rotation 355°

traffic white | RAL 9016

IP20

3740 lm

LED

3000 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 100 | R_f: 91 | R_{t(1-15)}: 89

MR 0.59 | MDER 0.53

Optical

spot | beam angle 14°

PstLM ≤ 1.0 ^{1 2} | SVM ≤ 0.4 ^{1 2}

Electrical

non DIM

PC1 | 220-240 V

system 42 W

system 89 lm/W³

Physical

diameter 110 mm | height 185 mm

1 kg

¹ 1050 mA ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Installation instructions



Lighting calculator



VARO 110

track
080-6120517S



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	11
B13	15
B16	19
B20	23
C10	19
C13	25
C16	32
C20	39


Optical accessories

SNOOT WITH HONEYCOMB LOUVER

TYPE for VARO 110	Ø (MM) 106	ARTICLE NUMBER(S) 006-93130
----------------------	---------------	--------------------------------



Colour rendering

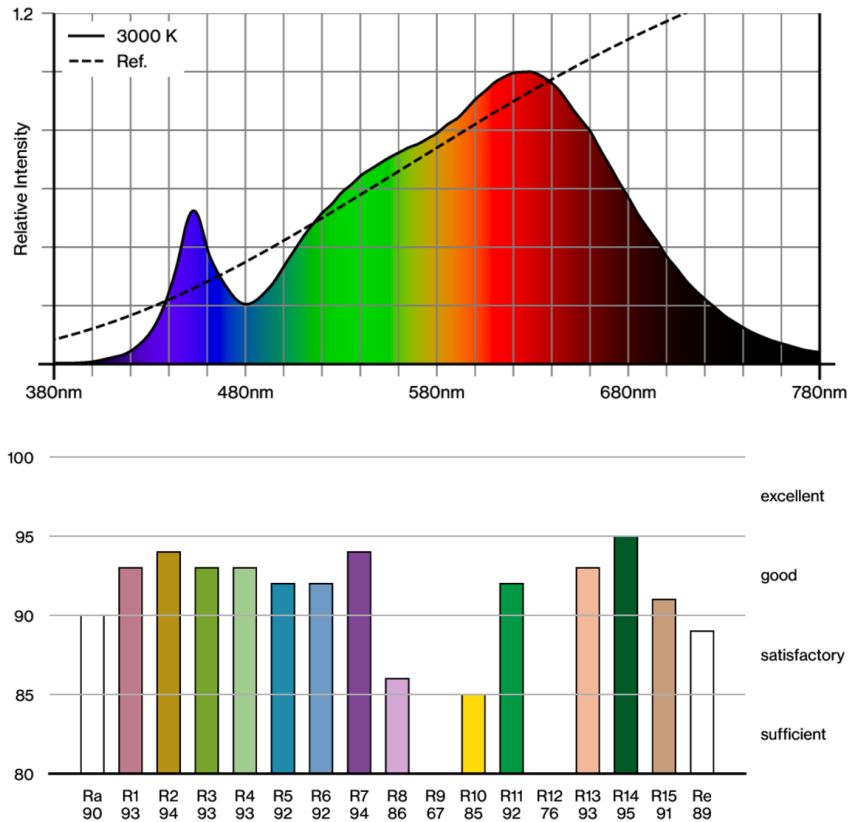

VARO 110

track
080-6120517S




Project / Type

Notes

Count / Date

TM30 colour vector graphic

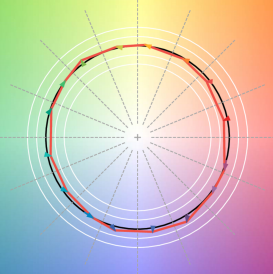

The black line represents the black body reference. The red line indicates the results of the test light source. The deviation from the test light source to the reference is shown and is marked by arrows. The shorter the arrows, the higher the color rendering.

