

# BETO curve 400 | 180° direct / indirect power


suspended system  
074-7132638R



Project / Type


Notes

Count / Date

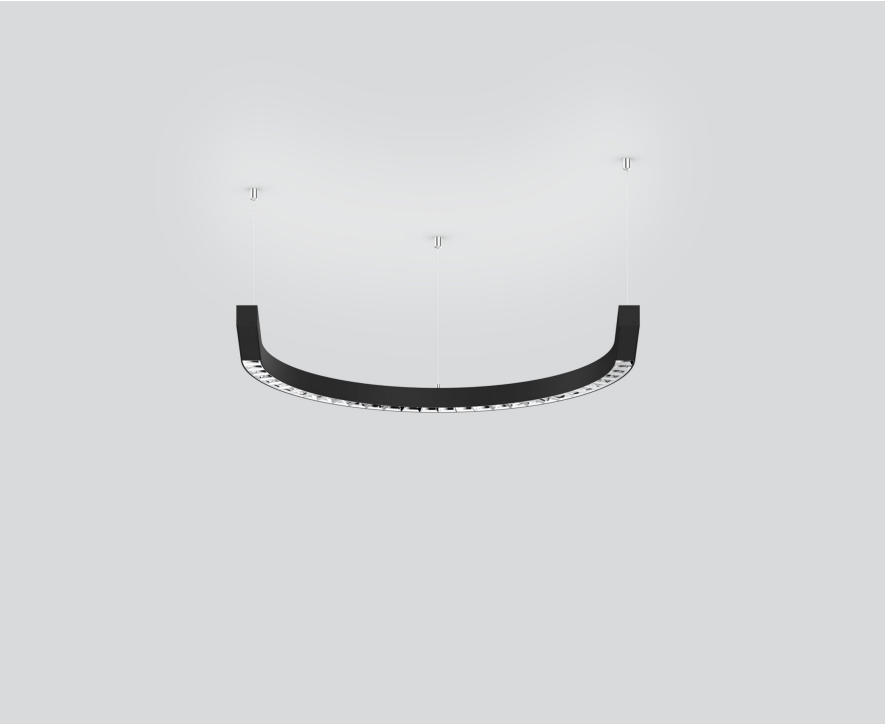


Luminaire housing made of extruded aluminium profile; extremely slim design (only 42 x 42 mm); CURVE segment design 180°; converter integrated into luminaire housing; no visible screws; angular design; for lighting systems; surface jet black powder coated; for suspended mounting (1500 mm cable suspension as an accessory); with integrated toolless suspension height adjustment on the luminaire; spring clip attachment to the luminaire; extruded profile for improved thermal management; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 80$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high gloss reflector with faceted design; Reflector chrome;  $UGR \leq 16$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 1500$  cd/m<sup>2</sup>; direct/indirect illumination characteristic; indirect light component with integrated PC boards and high quality lens system for maximum, homogeneous ceiling illumination, separately controllable; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Ceiling | Suspended

jet black | RAL 9005 <sup>1</sup>

Reflector chrome

IP20

indirect 4510 lm | direct 3610 lm

total 8120 lm

## LED

4000 K

CRI  $\geq 80$

L90 / 50000 h

initial MacAdam  $\leq 3$  SDCM

MR 0.72 | MDER 0.65

## Optical

Reflector | symmetric

$UGR \leq 16$  |  $\geq 65^\circ < 1500$  cd/m<sup>2</sup>

$P_{stLM} \leq 1.0^{2\ 3\ 4}$  |  $SVM \leq 0.4^{2\ 3\ 4}$

## Electrical

DALI-2 | 2 DALI Addr.

PC1 | 220-240 V

system 53 W

system 153 lm/W <sup>5</sup>

## Physical

length 654 mm | width 807 mm | height 42 mm

centerline radius 400 mm

segment 180°

2.7 kg

<sup>1</sup> RAL code <sup>2</sup> combined <sup>3</sup> segment  
<sup>4</sup> Value of containing product at full load (undimmed)  
<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Installation instructions



## Lighting calculator

