

# HEX-O MODULE FLAT 1000


suspended group  
073-693720W



Project / Type


Notes

Count / Date

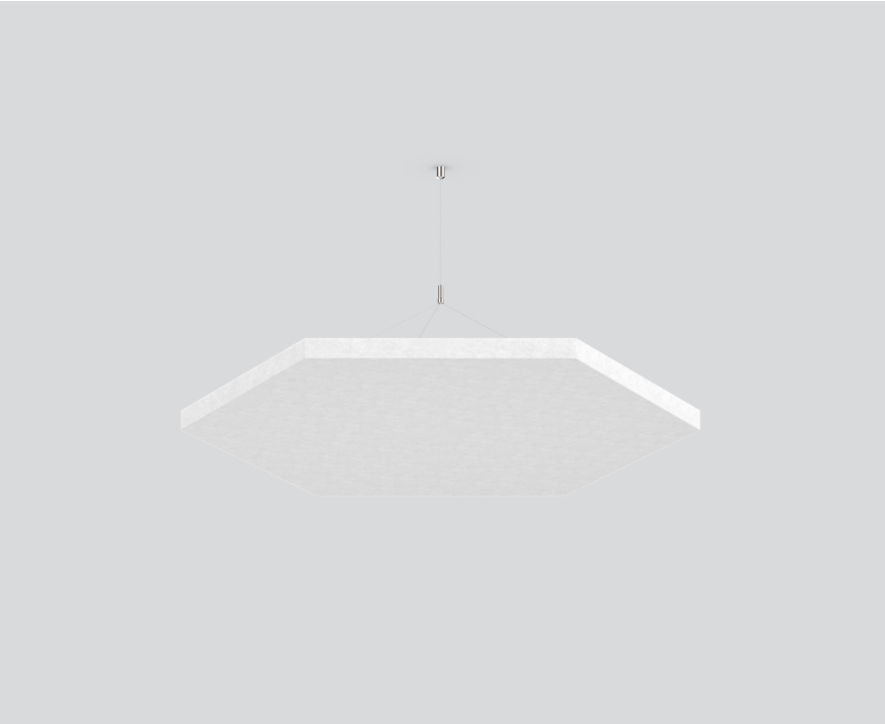

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, white; foreign fiber inclusions possible; pendant fitting with 1500mm cable suspension (1 cable); height adjustment without tools; suitable for group installation; including rear rail for alignment of the housings; can be combined with all HEX-O ceiling and TRIG-O ceiling luminaires and acoustic elements;

## Product drawing



**General**  
Ceiling | Suspended  
white

**Physical**  
cable 1500 mm (min. 500 mm)  
length 1000 mm | width 866 mm | height 40 mm  
7.5 kg

**Acoustics**  
Alpha w ( $\alpha_w$ ) up to 0.5 <sup>1</sup>  
SAC (sound absorption class) up to D <sup>1</sup>  
NRC up to 0.7 <sup>1</sup>  
SAA up to 0.69 <sup>1</sup>

<sup>1</sup> Acoustic data calculations based on HEX-O FLAT 750, cavity 1cm

## Installation instructions



# HEX-O MODULE FLAT 1000

suspended group  
073-693720W



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.06	0.17	0.45	0.67	0.84	0.72

## Sound absorption coefficient ( $\alpha_p$ )

