

# HEX-O 1000

ceiling


073-61715370



Project / Type

Notes

Count / Date

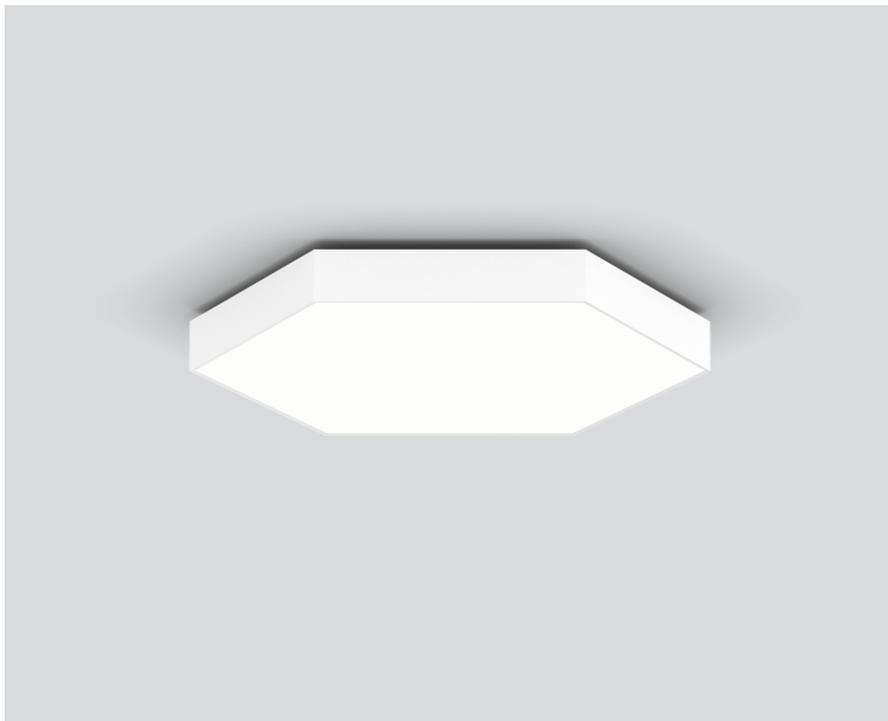

## General

Ceiling | Surface

white | RAL 9010 <sup>1</sup>

IP20

8740 lm

## LED

3000 K

CRI  $\geq$  80

L90 / 50000 h

initial MacAdam  $\leq$  3 SDCM

MR 0.54 | MDER 0.49

## Optical

Opal | opal (lambertsch)

PstLM  $\leq$  1.0 <sup>2</sup> | SVM  $\leq$  0.4 <sup>2</sup>

## Electrical

DALI-2 | 1 DALI Addr.

PC1 | 220-240 V

system 68 W

system 129 lm/W <sup>3</sup>

minimum cable length on-site 0.5m

## Physical

length 1000 mm | width 866 mm | height 100 mm


17 kg

Hexagonal light fitting from aluminium profile; seamlessly welded; surface white powder coated; suitable for ceiling mounting; convenient quick mounting system without tools; suitable for single or group installation; can be combined with all HEX-O ceiling and TRIG-O ceiling luminaires and acoustic elements; highly reflective coating for improved efficiency; completely homogeneously illuminated, satinised PMMA cover; same luminance for all size versions; light colour 3000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; luminaire with 2 cable openings and plug-in terminal for through wiring; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

<sup>3</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency

## Light distribution



## Product drawing



## Installation instructions



## Lighting calculator

