


HEX-O MODULE FLAT 750

suspended single
073-692620G



Project / Type	
Notes	
Count / Date	

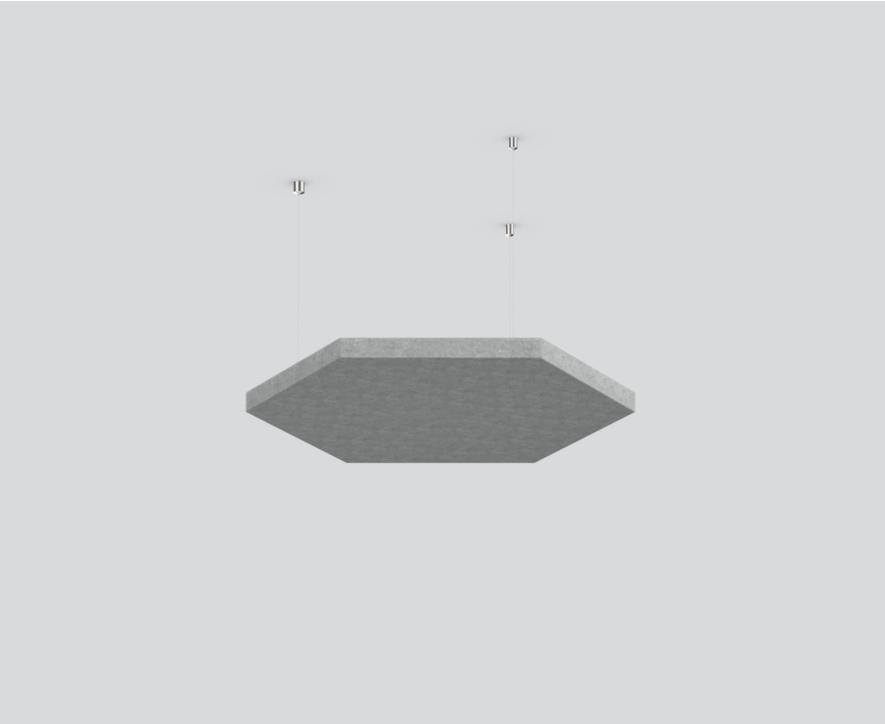

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, felt grey; foreign fiber inclusions possible; pendant fitting with 1500mm cable suspension (3 cables); height adjustment without tools; suitable for single installation; sound absorbing HEX-O ABSORBER available as an accessory; accessories are listed separately;

Product drawing



General
Ceiling Suspended
felt grey
fire resistance class: B-s1, d0

Physical
cable 1500 mm (min. 500 mm)
length 750 mm width 650 mm height 40 mm
5.2 kg

Acoustics
Alpha w (α_w) up to 0.5 ¹
SAC (sound absorption class) up to D ¹
NRC up to 0.7 ¹
SAA up to 0.69 ¹

¹ Acoustic data calculations based on HEX-O FLAT 750, cavity 1cm

Installation instructions



HEX-O MODULE FLAT 750

suspended single
073-692620G



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.03	0.1	0.27	0.4	0.5	0.43

Sound absorption coefficient (α_p)



Acoustic accessories

HEX-O ABSORBER 1000

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	1000-866-237	073-691740D
felt grey	1000-866-237	073-691740G
black	1000-866-237	073-691740L
white	1000-866-237	073-691740W
acoustic special colours	1000-866-237	073-691740X

