


HEX-O MODULE 750

suspended single
073-692610W



Project / Type	
Notes	
Count / Date	

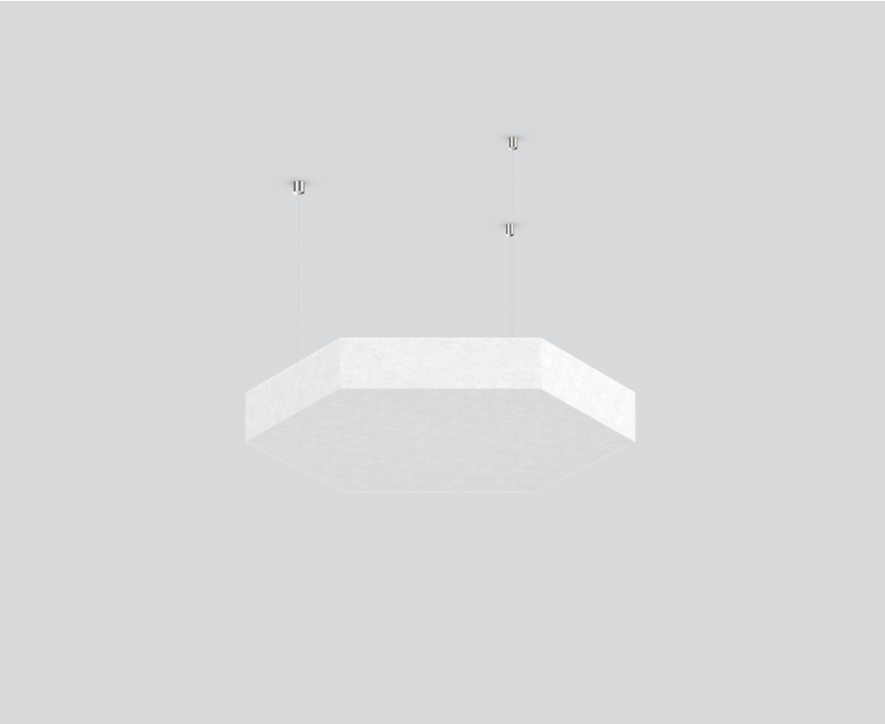

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, white; foreign fiber inclusions possible; pendant fitting with 1500mm cable suspension (3 cables); height adjustment without tools; suitable for single installation; sound absorbing HEX-O ABSORBER available as an accessory; accessories are listed separately;

Product drawing



General	
Ceiling Suspended	
white	

Physical	
cable 1500 mm (min. 500 mm)	
length 750 mm width 650 mm height 100 mm	
4.7 kg	

Acoustics	
Alpha w (α_w) up to 0.9 ¹	
SAC (sound absorption class) up to A ¹	
NRC up to 0.85 ¹	
SAA up to 0.88 ¹	

¹ Acoustic data calculations based on HEX-O MODULE 750, cavity 1cm

Installation instructions



HEX-O MODULE 750

suspended single
073-692610W



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.17	0.33	0.57	0.6	0.53	0.6

Sound absorption coefficient (α_p)



Acoustic accessories

HEX-O ABSORBER 1000

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	1000-866-237	073-691740D
felt grey	1000-866-237	073-691740G
black	1000-866-237	073-691740L
white	1000-866-237	073-691740W
acoustic special colours	1000-866-237	073-691740X

