



HEX-O MODULES


Equivalent sound absorption area, A_T (m²)

HEX-O 500 with ABSORBER 750

The equivalent sound absorption area's published values were derived mathematically from the HEX-O 750 with ABSORBER 1000 elements' results as measured in the reverberation room.

The corresponding certificates are available on XAL's website in the Services & Download section under Certificates - [Acoustic Certificates](#).

α_w (Class)
0,95 (A)

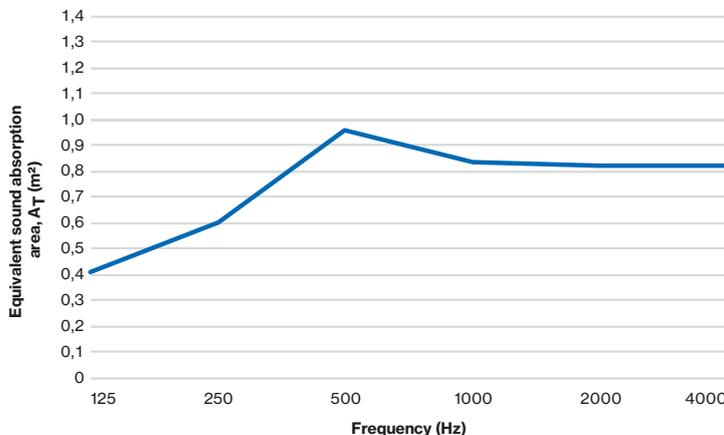


Frequency (Hz)	125	250	500	1000	2000	4000
Equivalent sound absorption area, A_T (m ²)	0,4	0,6	1,0	0,8	0,8	0,8

HEX-O 750 with ABSORBER 1000

The corresponding certificates are available on XAL's website in the Services & Download section under Certificates - [Acoustic Certificates](#).

α_w (Class)
0,95 (A)

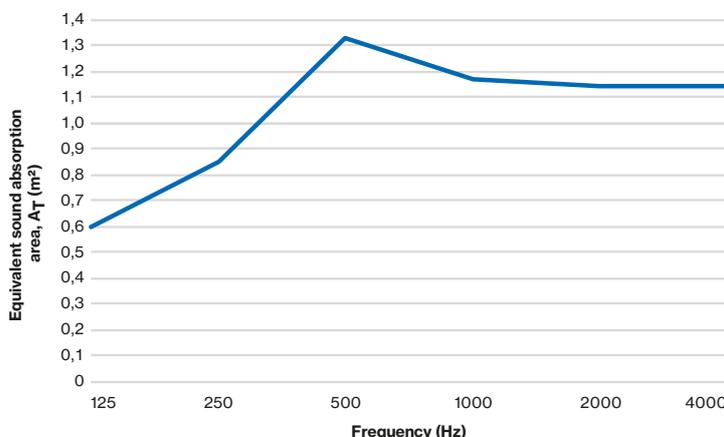

Frequency (Hz)	125	250	500	1000	2000	4000
Equivalent sound absorption area, A_T (m ²)	0,6	0,8	1,3	1,2	1,1	1,1