## **HEX-O ABSORBER 1000**

073-691740X



Project / Type

Notes Count / Date

#### General

Luminaire / Track   Mounted	
acoustic special colours	

#### Physical

length 1000 mm | width 866 mm | height 237 mm 4.6 kg


#### Acoustics

Alpha w ( $\alpha_w$ ) up to 0.95 <sup>1</sup>
SAC (sound absorption class) up to A <sup>1</sup>
NRC up to 0.9 <sup>1</sup>
SAA up to 0.96 <sup>1</sup>

 $^{\rm 1}$  Acoustic data calculations based on HEX-O ABSORBER 1000, cavity 1cm

Installation instructions



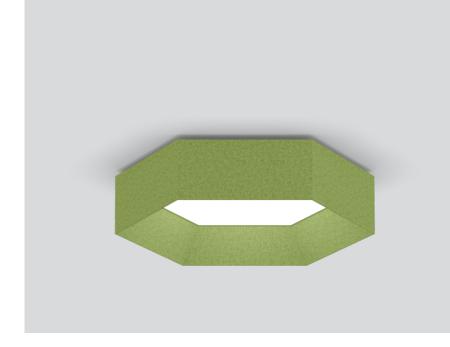

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, acoustic special colours; foreign fiber inclusions possible; to combine with HEX-O 750, HEX-O MODULE 750 or HEX-O MODULE FLAT 750; installation without tools;



**HEX-O ABSORBER 1000** 

073-691740X



Project / Type

Notes Count / Date

# Equivalent sound absorption area (A<sub>eq</sub>) 125 HZ 250 HZ 500 HZ 1000 HZ 2000 HZ 4000 HZ 0.57 0.83 1.33 1.17 1.13 1.13

### Sound absorption coefficient (ap)

