

# HEX-O ABSORBER 750


073-691640G



Project / Type

Notes

Count / Date

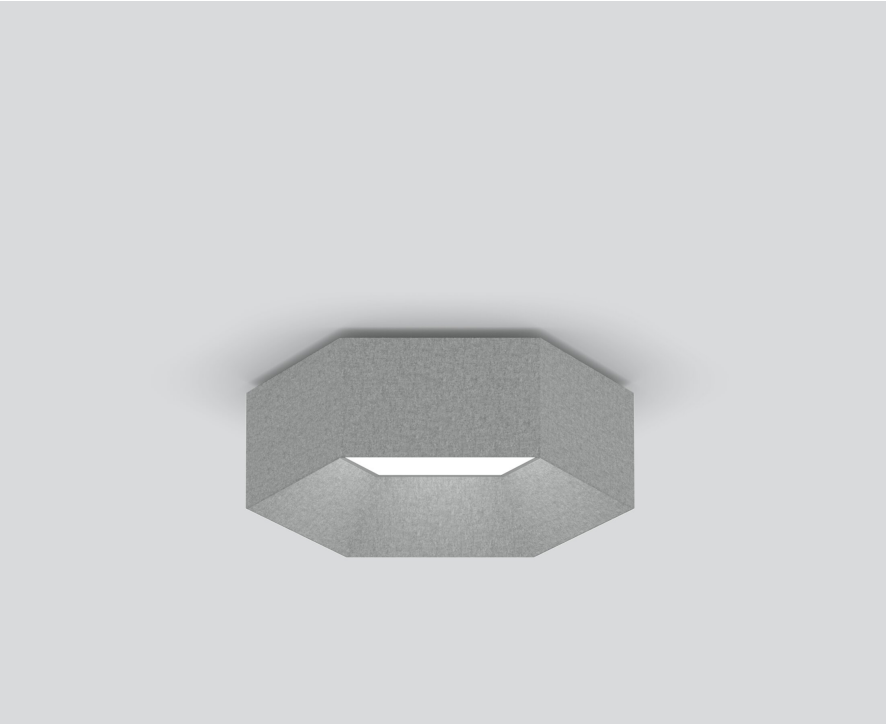

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, felt grey; foreign fiber inclusions possible; to combine with HEX-O 500 or HEX-O MODULE 500; installation without tools;

General

Luminaire / Track | Mounted

felt grey

fire resistance class: B-s1, d0

PET felt (made of at least 50% post-consumer recycled material)

Physical

length 750 mm | width 650 mm | height 237 mm

3.3 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.95 <sup>1</sup>

SAC (sound absorption class) up to A <sup>1</sup>

NRC up to 0.9 <sup>1</sup>


SAA up to 0.96 <sup>1</sup>

<sup>1</sup> Acoustic data calculations based on HEX-O ABSORBER 1000, cavity 1cm

## Installation instructions



## Product drawing



# HEX-O ABSORBER 750

073-691640G



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.42	0.61	0.98	0.86	0.84	0.84

## Sound absorption coefficient ( $\alpha_p$ )

