MOVE IN 45 square

trim

063-8421517M 063-8842118 002-90724

Project / Type

Notes

Count / Date

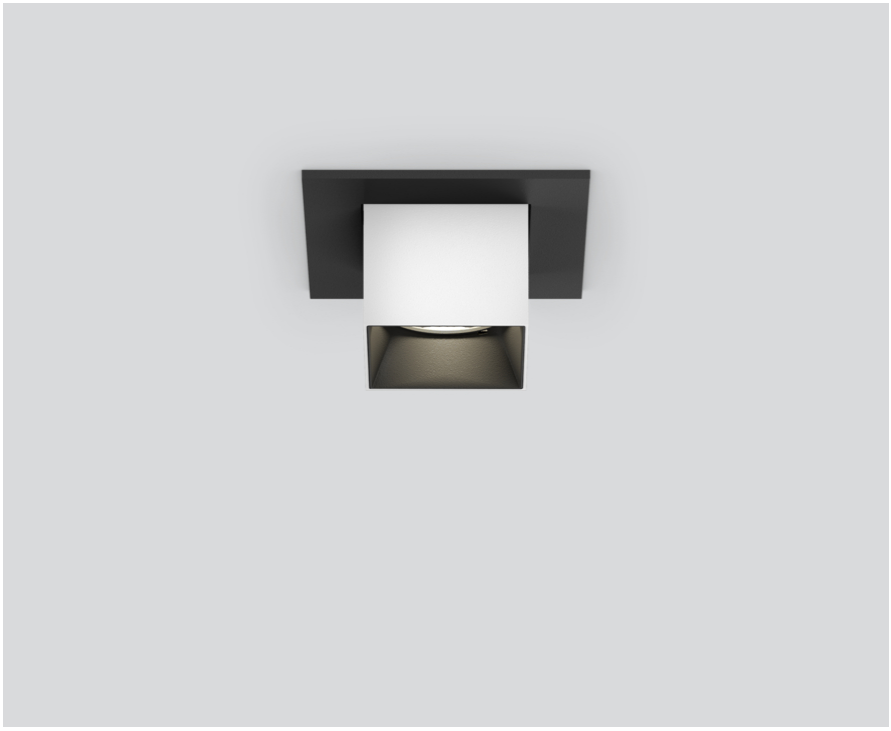

220-240 V | X-PERT | X-PERT

Square spotlight element in aluminium; surface white powder coated; installation without tools in mounting set due to patented ball catch system; recessed light with trim jet black; suitable for ceiling thickness of 2-25 mm; spotlight element height adjustable without tools: flush with the ceiling, or extended 25 mm or 35 mm; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high quality, aluminium, vapour deposition coated reflector with faceted lens design; precise radiation characteristic with 24° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC2; 220-240 V; incl. converter, non dimmable; converter wired secondary side; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



medium 24°

h (m)	E0° (lx)	ø (m)
1	6120	0.43
2	1530	0.86
3	680	1.30
4	380	1.73
5	240	2.16

Product drawing



General

Ceiling | Semi-Recessed
white | RAL 9016 [1]
Mounting set jet black
IP20
1270 lm
fixture 95 lm/W [2]

LED

3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 100 | R_f: 91 | $R_{f(1-15)}$: 89
MR 0.59 | MDER 0.53

Optical

medium | beam angle 24°
PstLM ≤ 1.0 [3]| SVM ≤ 0.4 [3]

Electrical

non DIM
PC2 | 220-240 V
system 15.9 W | fixture 13.5 W
36 Vf | 400 mA

Physical

trim
diameter 78 mm | height 105 mm
0.48 kg

Cutout

diameter 70 mm
min. ceiling thickness 2 mm | max. ceiling thickness 25 mm
recessed depth 180 mm

[1] RAL code
[2] incl. consideration of optical losses & internal control unit losses
[3] Value of containing product at full load (undimmed)

Installation instructions

Lighting calculator

['063-8421517M 063-8842118 002-90724'] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com