

MOVE IN 45 flex round

trim

063-8221517F 063-8822117 002-90724



Project / Type _____

Notes _____

Count / Date _____



General

Ceiling , Semi-Recessed _____

tilt max 90° _____

rotation 360° _____

white , RAL 9016 ¹ _____

Mounting set traffic white _____

IP20 _____

1310 lm _____

LED

3000 K _____

CRI ≥ 90 _____

L80 / 50000 h _____

initial MacAdam ≤ 2 SDCM _____

R_g: 100 , R_f: 91 , R_{f(1-5)}: 89 _____

MR 0.59 _____

MDER 0.53 _____

Optical

flood _____

beam angle 36° _____

PstLM ≤ 1.0 ² _____

SVM ≤ 0.4 ² _____

Electrical

non DIM _____

220-240 V _____

system 15.9 W _____

fixture 13.5 W _____

fixture 97 lm/W³ _____

36 Vf _____

400 mA _____

PC2 _____

Physical

trim _____

diameter 77 mm _____

height 107 mm _____

0.57 kg _____

Cutout

diameter 65 mm _____

min. ceiling thickness 2 mm _____

max. ceiling thickness 25 mm _____

recessed depth 200 mm _____

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. consideration of optical losses & internal control unit losses


Light distribution



flood 36°

h (m)	E0° (lx)	ø (m)
1	3900	0.65
2	980	1.29
3	430	1.94
4	240	2.59
5	160	3.23

Product drawing

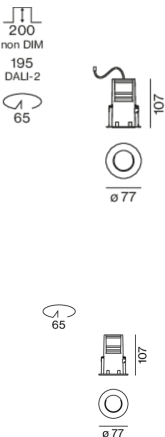

Installation instructions



Lighting calculator



[063-8221517F 063-8822117 002-90724] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com