

# TASK ACOUSTIC 1200 square wide


suspended  
059-579266X



Project / Type

Notes

Count / Date

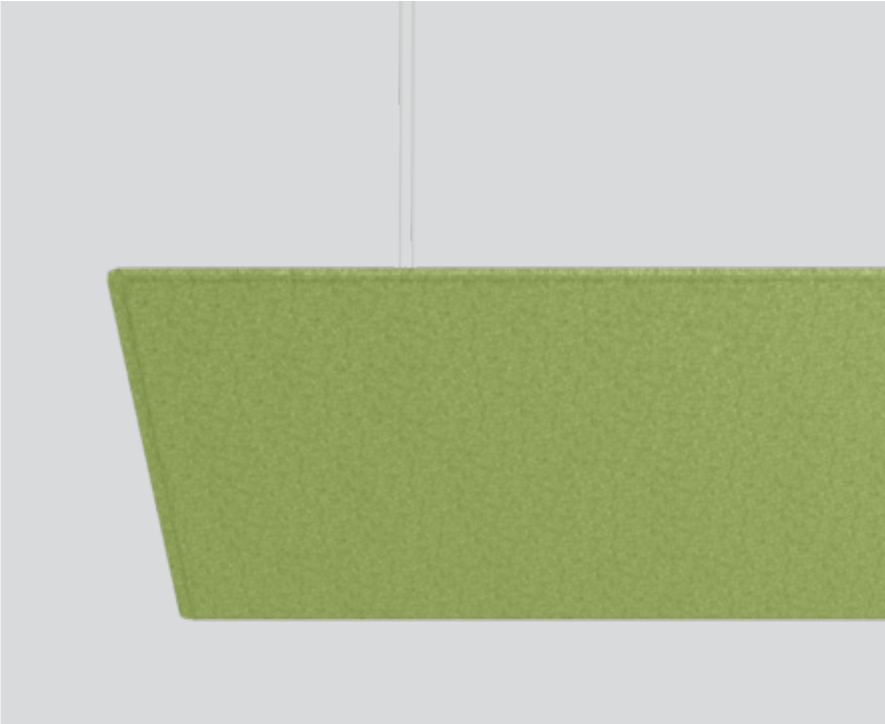

General

Ceiling | Suspended

acoustic special colours

Physical

panel only

length 1155 mm | width 1180 mm | height 30 mm

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.95 <sup>1</sup>

SAC (sound absorption class) up to A <sup>1</sup>

NRC up to 0.95 <sup>1</sup>

SAA up to 0.91 <sup>1</sup>

<sup>1</sup> Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 20cm

## Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; square design; high quality visual and tactile surface, acoustic special colours; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

## Product drawing



# TASK ACOUSTIC 1200 square wide

suspended  
059-579266X



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.75	1.02	1.56	1.94	2.24	2.45

## Sound absorption coefficient ( $\alpha_p$ )

