


# TASK ACOUSTIC 1200

## half round

suspended  
059-579246X



|                |  |
|----------------|--|
| Project / Type |  |
| Notes          |  |
| Count / Date   |  |

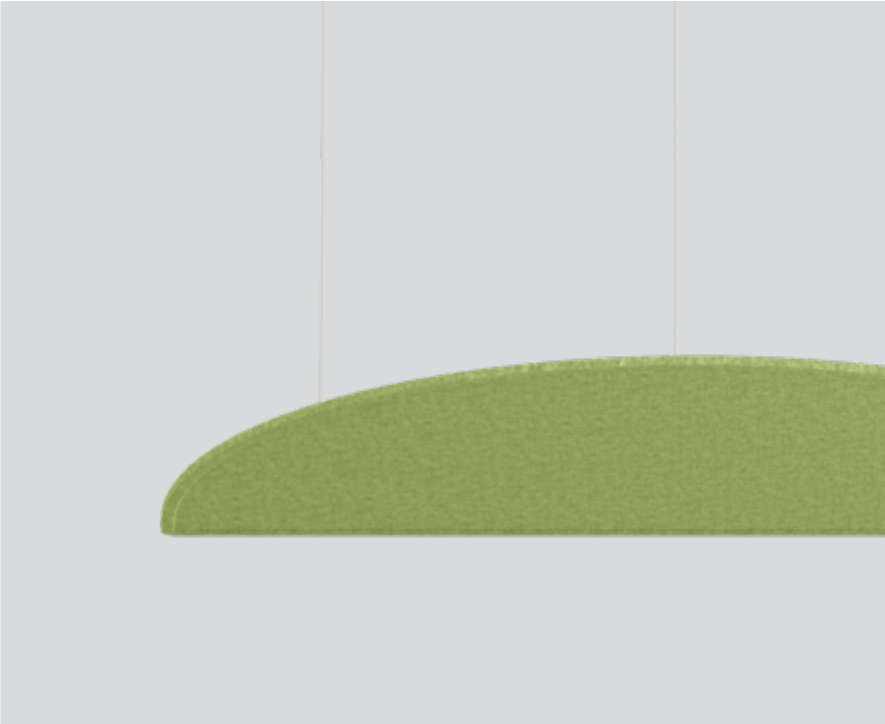

|                          |
|--------------------------|
| <b>General</b>           |
| Ceiling   Suspended      |
| acoustic special colours |

|  |
|--|
| <b>Physical</b>                              |
| panel only                                   |
| length 1155 mm   width 573 mm   height 30 mm |
| 4.2 kg                                       |

|   |
|---|
| <b>Acoustics</b>                                  |
| Alpha w ( $\alpha_w$ ) up to 0.95 <sup>1</sup>    |
| SAC (sound absorption class) up to A <sup>1</sup> |
| NRC up to 0.95 <sup>1</sup>                       |
| SAA up to 0.91 <sup>1</sup>                       |

<sup>1</sup> Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 20cm

### Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; half round design; high quality visual and tactile surface, acoustic special colours; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

### Product drawing

