

# TASK ACOUSTIC 1200

## half round


suspended  
059-579246L



Project / Type


Notes

Count / Date

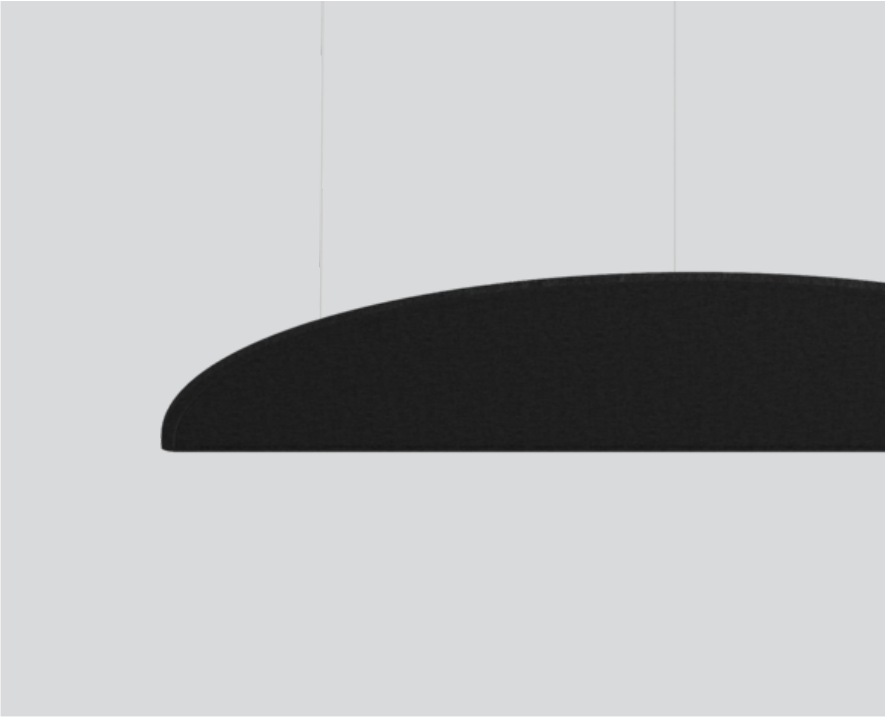

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; half round design; high quality visual and tactile surface, black; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

### Product drawing



General

Ceiling | Suspended

black

fire resistance class: B-s1, d0

PET felt (made of at least 50% post-consumer recycled material)

Physical

panel only

length 1155 mm | width 573 mm | height 30 mm

4.2 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.95 <sup>1</sup>

SAC (sound absorption class) up to A <sup>1</sup>

NRC up to 0.95 <sup>1</sup>

SAA up to 0.91 <sup>1</sup>

<sup>1</sup> Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 20cm

### Installation instructions

